




Terminals & Splices > Quick Disconnects

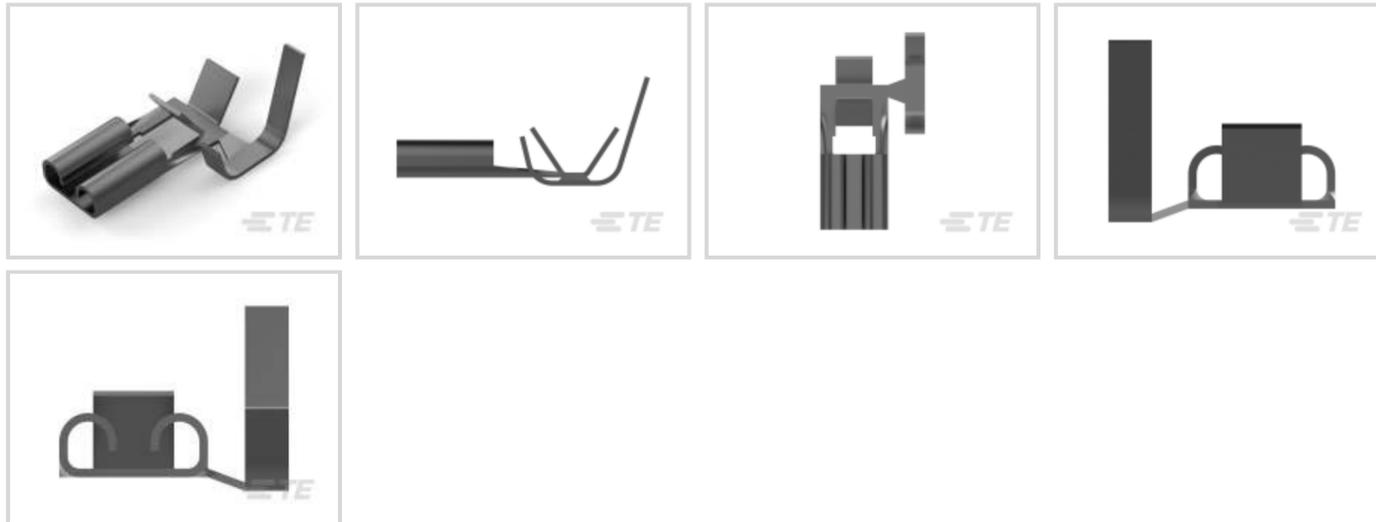

Quick Disconnect Terminal Type: **Receptacle**

Wire Size: .82 – 2.08 mm<sup>2</sup>

Mating Tab Width: 4.75 mm [.187 in]

Mating Tab Thickness: .51 mm [.02 in]

## Features

### Product Type Features

|                 |        |
|-----------------|--------|
| Insertion Force | Normal |
|-----------------|--------|

### Configuration Features

|                                   |               |
|-----------------------------------|---------------|
| Connection Capacity               | Single        |
| Compatible With Wire & Cable Type | Discrete Wire |

### Contact Features

|                                |                   |
|--------------------------------|-------------------|
| Quick Disconnect Terminal Type | Receptacle        |
| Mating Tab Width               | 4.75 mm [.187 in] |
| Mating Tab Thickness           | .51 mm [.02 in]   |
| Terminal Orientation           | Flag              |
| Contact Base Material          | Brass             |
| Terminal Plating Material      | Tin               |
| Crimp Type                     | F-Crimp           |
| Barrel Type                    | Open              |

### Termination Features

|  |  |
|--|--|
|  |  |
|--|--|



|                       |              |
|-----------------------|--------------|
| Product Terminates To | Wire & Cable |
|-----------------------|--------------|

### Mechanical Attachment

|                         |        |
|-------------------------|--------|
| Wire Insulation Support | With   |
| Mating Retention Type   | Dimple |

### Dimensions

|                                      |                              |
|--------------------------------------|------------------------------|
| Terminal Material Thickness          | .3 mm[.012 in]               |
| Product Length                       | 11.3 mm[.444 in]             |
| Compatible Insulation Diameter Range | 2.79 – 3.81 mm[.11 – .15 in] |
| Wire Size                            | .82 – 2.08 mm <sup>2</sup>   |

### Usage Conditions

|                             |                            |
|-----------------------------|----------------------------|
| Insulation Option           | Uninsulated                |
| Operating Temperature Range | -40 – 110 °C[-40 – 230 °F] |

### Industry Standards

|                 |    |
|-----------------|----|
| Agency/Standard | UL |
|-----------------|----|

### Packaging Features

|                    |            |
|--------------------|------------|
| Packaging Quantity | 10000      |
| Packaging Method   | Strip/Reel |

### Other

|      |        |
|------|--------|
| Line | Budget |
|------|--------|

## Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

|   |  |
|---|--|
| EU RoHS Directive 2011/65/EU                  | Compliant  |
| EU ELV Directive 2000/53/EC                   | Compliant  |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold  |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2023 (235)<br>Candidate List Declared Against: JAN 2023 (233)<br>Does not contain REACH SVHC |
| Halogen Content                               | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free  |
| Solder Process Capability                     | Not applicable for solder process capability   |



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

### Compatible Parts



TE Part # 2-2150250-1  
OC-PA-E-FM-110F220F-001-0046



TE Part # 2-2150250-2  
OC-PA-E-FA-110F220F-001-0046



TE Part # 2150250-1  
OC-AT-E-FM-110F220F-001-0046



TE Part # 2150250-2  
OC-AT-E-FA-110F220F-001-0046



TE Part # 881006-2  
.375 FASTON FLAG RE


### Also in the Series | FASTON 187



Crimp Terminal Housings(42)



Insertion & Extraction Tools(1)

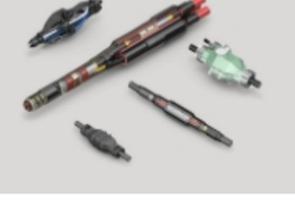

Joints & Splices(1)



PCB Terminals(42)



Quick Disconnects(209)



Splices(1)

## Customers Also Bought

TE Part #32059  
TERMINAL,PIDG SPD 16-14 8TE Part #794616-2  
FREE HANG DBL ROW HSG 2 POSTE Part #3-641437-2  
02P MTA156 PSTD CONN ASSY REDTE Part #160252-2  
RING TONGUE IS AUTOMATIC 0.5-  
1.43MM2TPBRTE Part #63093-1  
250 FASTON REC 18-14 AWG TPBRTE Part #926984-1  
STD TIMER CONTACTTE Part #327743  
TERMINAL,PIDG R 16-14HD 1/4TE Part #316834-2  
040 SEALED TAB CONT. S / GOLDTE Part #2-170823-8  
187 FASTON SLEEVE,FLAG,REC.,  
TRANSPARENT

## Documents

### CAD Files

Customer View Model

[ENG\\_CVM\\_CVM\\_1742088-2\\_H.2d\\_dxf.zip](#)

English

### 3D PDF

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_1742088-2\\_H.3d\\_igs.zip](#)



English

### Customer View Model

[ENG\\_CVM\\_CVM\\_1742088-2\\_H.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

### Datasheets & Catalog Pages

[82004 FASTON Terminals \(Insulated and Uninsulated\) Catalog - FASTON Receptacles Section](#)

English

### Product Specifications

[Application Specification](#)

English

### Product Environmental Compliance

[Product Compliance](#)

English

[Product Compliance](#)

English

### Agency Approvals

[CSA Certificate](#)

English

[CSA Certificate](#)

English