

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: USBC 3.1 Male/Plug Vertical SMT 24 pins	
	Model No. <a href="#">Connector</a>	Part No./Ordering No. <a href="#">PLUG-USBC-241SMTV-4BS60</a>
		Rev A1

In Addition to GlobTek Inc.'s renewed ISO9001:2008 - Quality Management System Certification, GlobTek Inc. is now certified to:

ISO13485:2003 - Medical Devices Quality Management System Certification  
ISO14001:2004 - Environmental Management System Certification

ISO Certificates are available online at <http://www.globtek.com/iso-certificates/>

The acceptance of this specification and use of the product described in this document indicates the acceptance and binding of the customer to Globtek TERMS AND CONDITIONS (attached to the end of this document), which supersede all other agreements, terms, and conditions (<http://en.globtek.com/terms-and-conditions/>).

Prop 65 Statement:<https://en.globtek.com/prop-65-statement.pdf>

Footnote:

GlobTek Inc. will not be liable for the safety and performance of these power supplies if unauthorized access and repair occurs. End user should consult applicable UL, CSA or EN standards for proper installation instruction.

Limitation of Use:

GlobTek products are intended for use with commercial, medical, and/or industrial equipment only. GlobTek product are not authorized for use as mission critical components in life support hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of GlobTek Inc.

Contents of this document are subject to change without prior notice.

**Customer Approval of Specification:**

Please approve, sign and send back to GlobTek so we can complete order processing.  
A delay in receipt of this form will delay delivery schedule.

Company Name: _____	Customer P/N: _____
Quote Number: _____	Date: _____
Authorized Representative Name: _____	Authorized Representative Signature: _____

GlobTek, Inc.  
 www.globtek.com  
 186 Veterans Drive,  
 Northvale, NJ 07647  
 Tel. (201) 784-1000  
 Fax (201) 784-0111

Drawing Title: USBC 3.1 Male/Plug Vertical SMT 24 pins

Model No. [Connector](#)

Part No./Ordering No. [PLUG-USBC-241SMTV-4BS60](#)

Rev A1

## REVISION HISTORY

REV	DESCRIPTION	SUB	DATE	APPROVED
A1	Update packing	QA	09/14/2022	QA
A	Initial release	QA	07/18/2022	QA

3D CAD FILE:

[https://www.globtek.com/file/dl/plug-usbc-241smtv-4bs60\\_asm.stp](https://www.globtek.com/file/dl/plug-usbc-241smtv-4bs60_asm.stp)

AGENCY ONLINE DOCUMENTS


RoHS/RoHS3 Declaration [https://www.globtek.com/pdf/rohs\\_cert/01t3a000005hOcpAAE](https://www.globtek.com/pdf/rohs_cert/01t3a000005hOcpAAE)

REACH Declaration [https://www.globtek.com/pdf/iso\\_certificates/REACH.pdf](https://www.globtek.com/pdf/iso_certificates/REACH.pdf)

Conflict Minerals Declaration <https://www.globtek.com/pdf/conflict-minerals.pdf>

Prop 65 Statement <https://en.globtek.com/prop-65-statement.pdf>

IPXY rating is based on 3rd party testing and customers should check suitability and test system level IPXY rating before ordering.

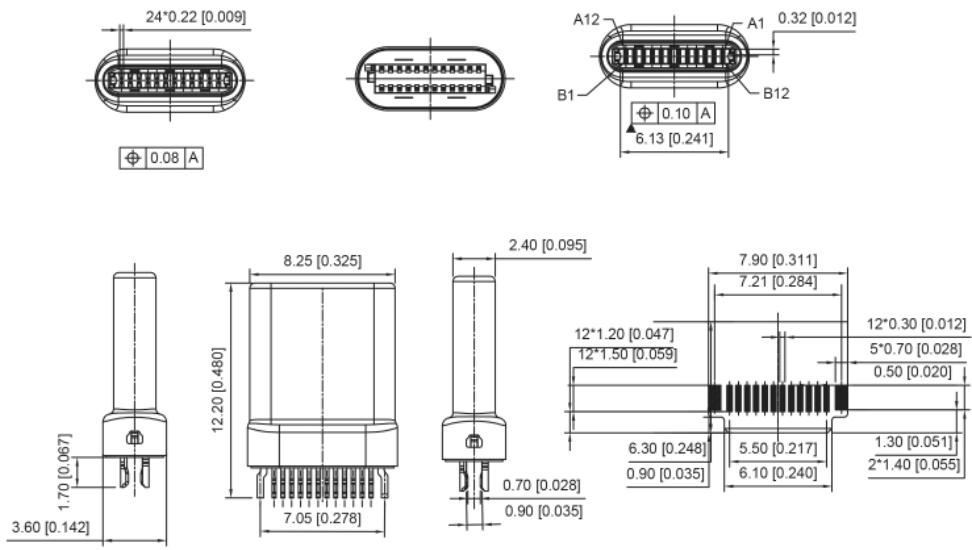

**PLUG-USBC-241SMTV-4BS60**

AU 1U"

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN

WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2022 - 2023

quest /08/04/2023 7:07:38 AM CLONED FROM LCP-CCP(R)

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: USBC 3.1 Male/Plug Vertical SMT 24 pins	
	Model No. <a href="#">Connector</a>	Part No./Ordering No. <a href="#">PLUG-USBC-241SMTV-4BS60</a>
		Rev A1

Material

Housing Material: High temperature thermoplastic UL 94V-0

Contact Terminal: High Grade Copper Alloy

Metallic Shell: Stainless Steel

Gnd Latch: Stainless Steel

Plating

Data Contact

Underplating: 50µ" Min. Nickel

Contact Plating: 1µ" Gold

Solder Area: 80µ" Matte Tin

Shell

Metallic Shell: 50µ" Min. Nickel

Cover Shell

Metallic Shell: 80µ" Min. Nickel

Inner Ground Cover Shell

Metallic Shell: 50µ" Min. Nickel

Electrical

Voltage Rating: 20V DC

Current Rating: Vbus pins collectively 5.00A, GND pins collectively 6.25A, B5 pin 1.25A, Other pins 0.25A per pin.

Contact Resistance: 40mΩ Max.

Insulation resistance: 100 MΩ MIN.

Dielectric withstanding voltage: 100V AC/Minute

Mechanical

Durability: 10,000 cycles

Temperature Life, Vibration, Cyclic Temperature and Humidity, Thermal Shock, Mixed Flowing Gas and etc.:

<https://www.globtek.com/pdf/ENVIRONMENTAL.pdf>

GlobTek, Inc.  
 www.globtek.com  
 186 Veterans Drive,  
 Northvale, NJ 07647  
 Tel. (201) 784-1000  
 Fax (201) 784-0111


Drawing Title: USBC 3.1 Male/Plug Vertical SMT 24 pins

Model No. [Connector](#)

Part No./Ordering No. [PLUG-USBC-241SMTV-4BS60](#)

Rev A1

Packing:

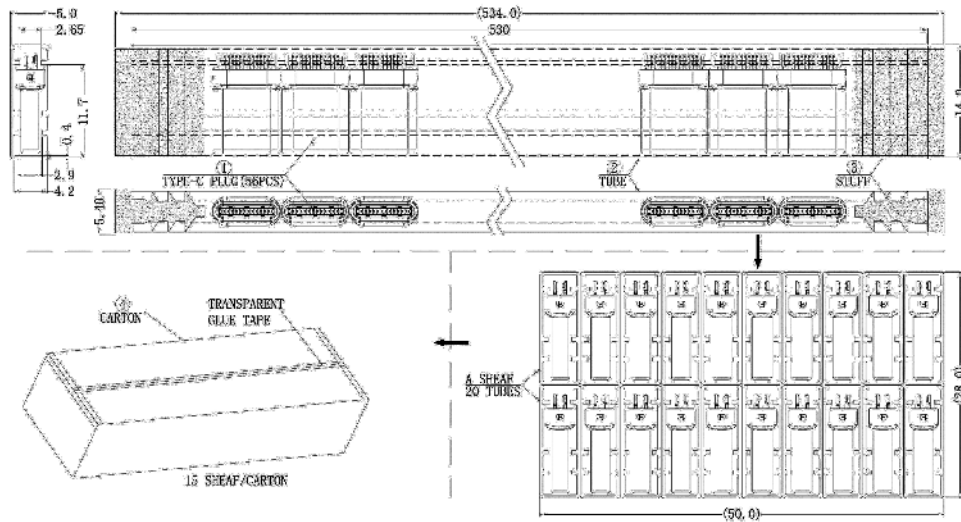

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: USBC 3.1 Male/Plug Vertical SMT 24 pins	
	Model No. <a href="#">Connector</a>	Part No./Ordering No. <a href="#">PLUG-USBC-241SMTV-4BS60</a>
		Rev A1

## PACKAGING

Packing Spec P/N:

Box Qty: 5600

Gift Box Size (mm):

Gift Box Color: White

Master Carton Size (mm): 680 x 135 x 135

Master Carton Cubic Volume (m<sup>3</sup>): 0.01

Master GW (Kg): 6.0 kg

wt Ea. (Kg): 0.00 kg

wt Ea. (Kg): 0.00 kg

LABEL SPECS: ,

PACK SPEC: