


PIN	1	2	3	4	5	6	7	8	9
COM1	1F	1G	1B	2F	2G	2B	2A		COM1
COM2	1E	1D	1C	2E	2D	2C	1A	COM2	

NOTES:

1. DISPLAY TYPE: TN
2. VIEWING DIRECTION: 6:00
3. POLARIZER MODE: POSITIVE/TRANSFLECTIVE
4. DRIVER METHOD: 1/2 DUTY 1/2 BIAS
5. OPERATING VOLTAGE: 3 V
6. OPERATING TEMP: -20~70°C
7. STORAGE TEMP: -30~80°C
8. CONNECTOR: PIN

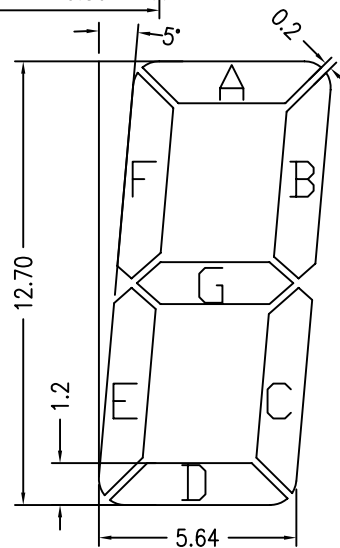

ORIENT DISPLAY

DRAWN: Wang

CHECKED:

APP:

LCD NO.:

DATE: 12/11/03

UNITS: MM

DWG NO.: OD-202

SHEET 1 OF 1