

Peak Sensitivity Wavelength: 855nm

The 855nm Point Source Series is designed for applications requiring high output and precise optical / mechanical axis alignment. Custom package solutions and sorting are available.

FEATURES

- > TO-18 Metal Can Package
- > Emitting Window Diameter $\Phi 150\mu\text{m}$
- > High Reliability
- > Wide Beam Angle

APPLICATIONS

- > Optical Switches / Security Systems
- > Linear & Rotary Encoder
- > Remote Controls / Robotics
- > Fiber Applications



Absolute Maximum Ratings (Ta=25°C)







| ITEMS | SYMBOL | RATINGS | UNIT |
|------------------------------|--------|------------|------|
| Forward Current | IF | 100 | mA |
| Forward Current (Pulse)*1 | IFP | 0.8 | A |
| Reverse Voltage | VR | 5 | V |
| Power Dissipation | PD | 190 | mW |
| Operating Temperature Range | Topr | -20 ~ +85 | °C |
| Storage Temperature Range | Tstg | -30 ~ +100 | °C |
| Junction Temperature | Tj | 100 | °C |
| Lead Soldering Temperature*2 | Tls | 260 | °C |





*1: Tw=10μsec, T=10msec. *2: Time 5 Sec max, Position: Up to 3mm from the body.

Electrical & Optical Characteristics (Ta = 25°C)

| ITEMS | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNIT |
|---------------------------|-----------------|------------|-----|-------|-----|------|
| Power Output | PO | IF=50mA | -- | 2.70 | -- | mW |
| Forward Voltage | VF | IF=50mA | -- | 1.59 | -- | V |
| Reverse Current | IR | VR=5V | -- | -- | 100 | μA |
| Peak Emission Wavelength | λ_p | IF=50mA | -- | 855 | -- | nm |
| Spectral Line Half Width | $\Delta\lambda$ | IF=50mA | -- | 31 | -- | nm |
| Half Intensity Beam Angle | Θ | IF=50mA | -- | +/-50 | -- | deg |

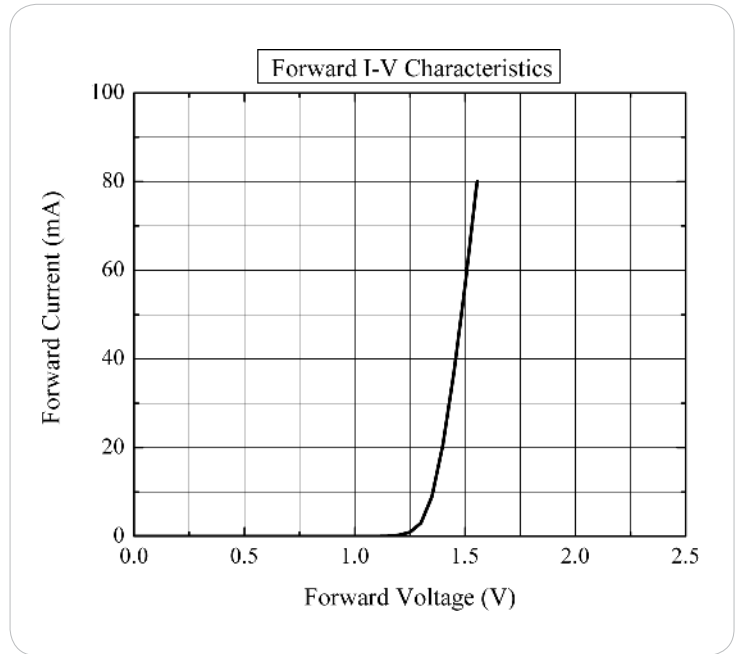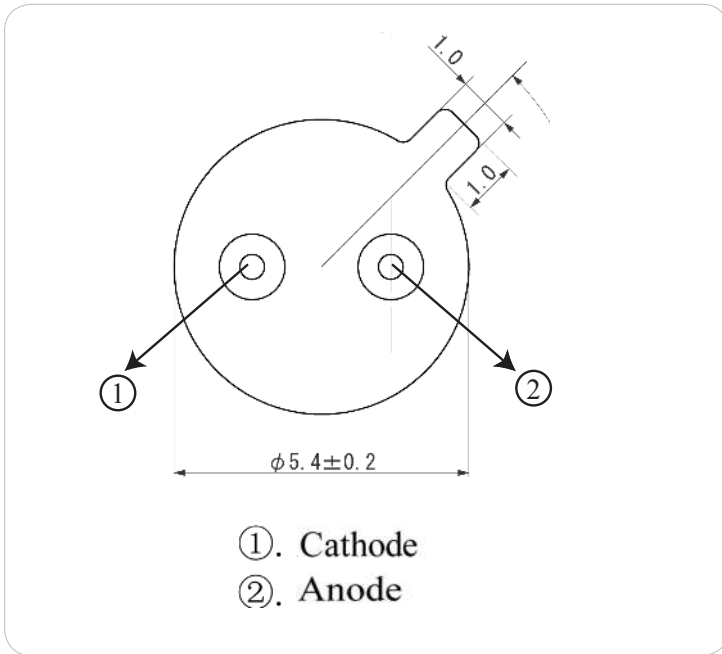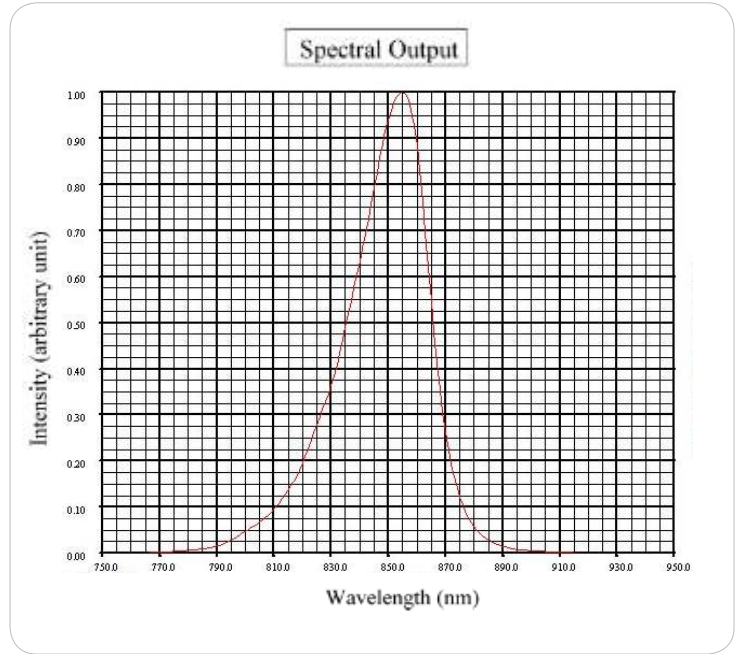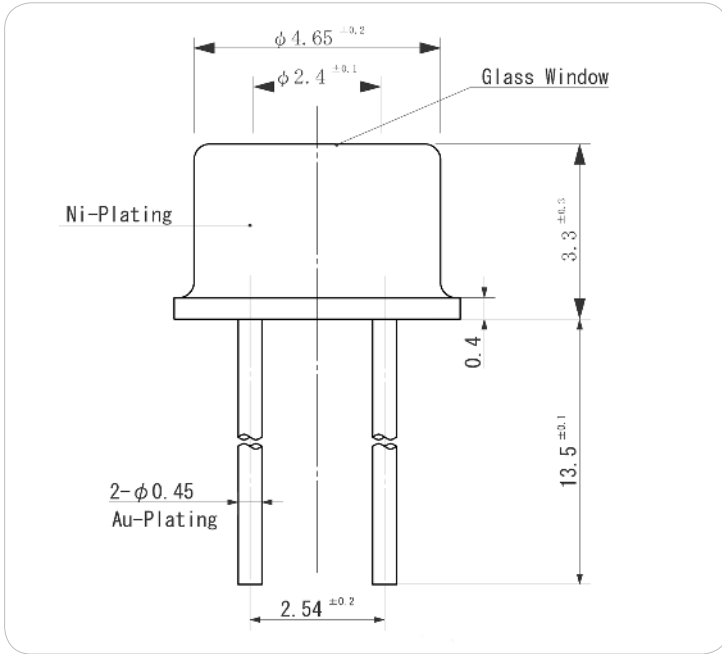

Unit: mm, Tolerance: ± 0.2

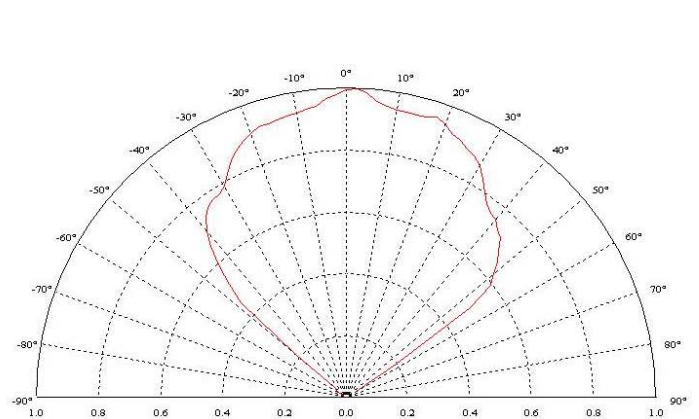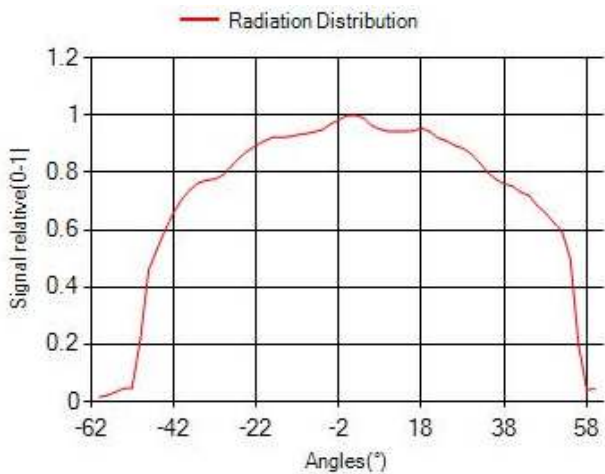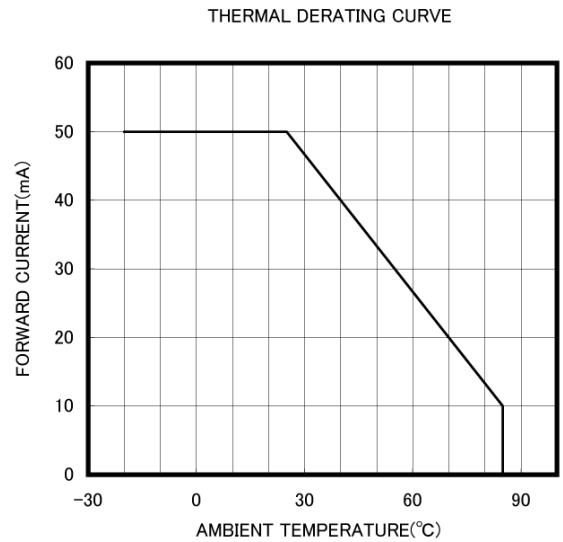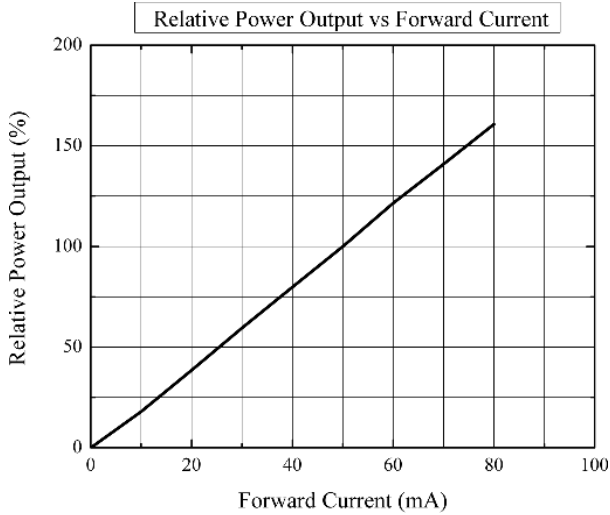

The information contained herein is subject to change without notice.

2018-07-12

