

HC-26S1N126300 - Device connector front mounting



1590349

<https://www.phoenixcontact.com/us/products/1590349>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector front mounting, straight, Screw locking mechanism, M27, number of positions: 26, contact connection type: Socket, Axial O-ring, Central fixing, shielded: yes, degree of protection: IP67, when plugged in, number of positions: 26, connection method: Solder connection, series: HC

Commercial data

Item number	1590349
Packing unit	1 pc
Note	Made to order (non-returnable)
Sales key	AB32
Product key	ABRAJL
GTIN	4046356186964
Weight per piece (including packing)	64.15 g
Weight per piece (excluding packing)	54.27 g
Customs tariff number	85366990
Country of origin	DE

HC-26S1N126300 - Device connector front mounting



1590349

<https://www.phoenixcontact.com/us/products/1590349>

Technical data

Mounting

Mounting	Central fixing
Connection method	Solder connection

Product properties

Product type	Circular connectors (device side)
Number of positions	26
Connection profile	26
Application	Signal
Series	HC
Shielded	yes
Coding	N
Thread type	M27

Material specifications

Seal material	FPM or NBR or EPDM
Housing material	Turned parts: copper zinc alloy (CuZn), die-cast parts: zinc (GD-Zn)
Insulator material	PA66
Contact material	CuZn
Contact surface	Nickel-plated, gold coating
Gasket and O-ring material	FPM
Housing material	Metal

Electrical properties

Contact

Contact diameter	1 mm
Min. cross section	0.08 mm ²
Max. cross section	1 mm ²
Max. current	8 A
Nominal voltage U _N	48 V AC 74 V DC
Overvoltage category	III
Degree of pollution	3
Rated surge voltage	1.5 kV

Connection data

Conductor connection

Connection method	Solder connection
Contact connection type	Socket

Mechanical properties

HC-26S1N126300 - Device connector front mounting



1590349

<https://www.phoenixcontact.com/us/products/1590349>

Mechanical data

Insertion/withdrawal cycles	50
-----------------------------	----

Connector

Type	straight
Direction of rotation	Standard


Environmental and real-life conditions

Ambient conditions


Degree of protection	IP67, when plugged in
Ambient temperature (operation)	-20 °C ... 125 °C
Altitude	2000 m

Drawings

Schematic diagram

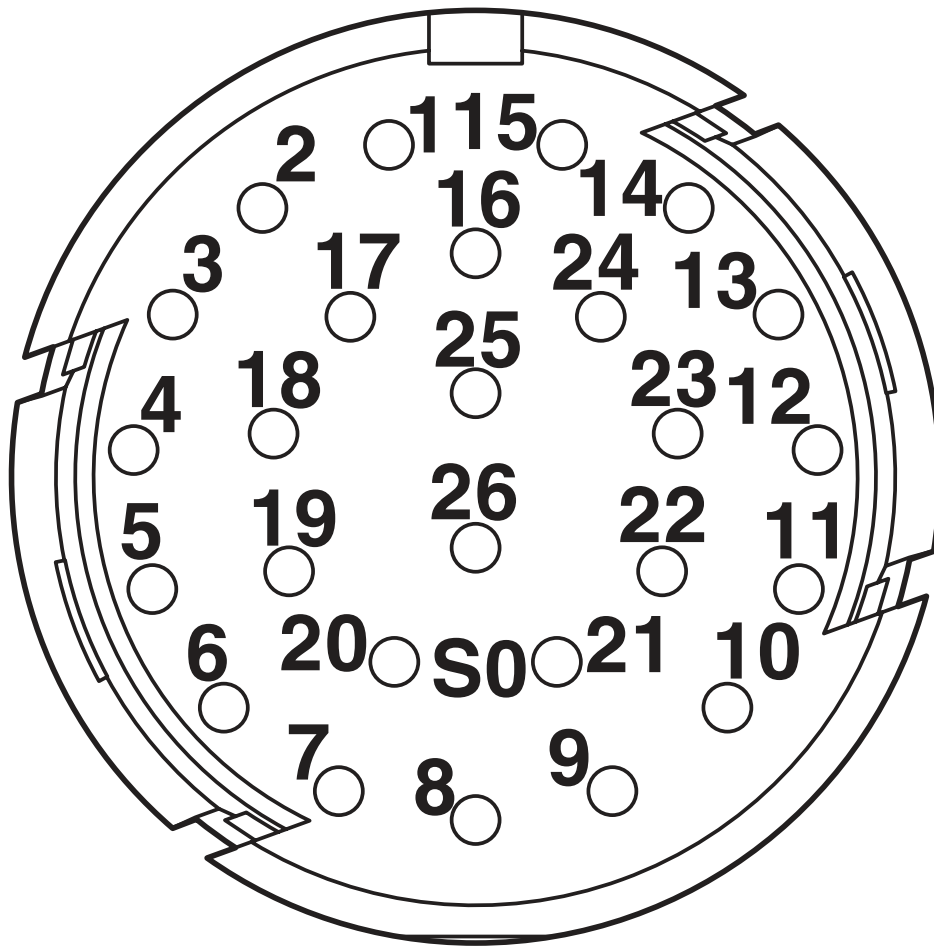

Dimensional drawing

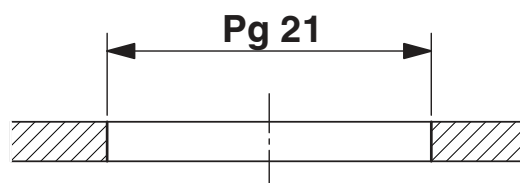


HC-26S1N126300 - Device connector front mounting

1590349

<https://www.phoenixcontact.com/us/products/1590349>



Dimensional drawing

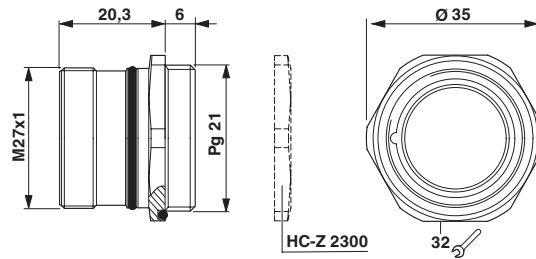

HC-26S1N126300 - Device connector front mounting



1590349

<https://www.phoenixcontact.com/us/products/1590349>

Classifications

ECLASS

ECLASS-11.0

27440102

ETIM

ETIM 8.0

EC003569

UNSPSC

UNSPSC 21.0

39121400

HC-26S1N126300 - Device connector front mounting



1590349

<https://www.phoenixcontact.com/us/products/1590349>

Environmental product compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com