

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


PANDUIT PART #	STUD SIZE		DIMENSIONS in. [mm]				
	ENGLISH	METRIC	$L \pm .03$ [0,8]	$W \pm .01$ [0,3]	$C \pm .02$ [0,5]	$M \pm .03$ [0,8]	$H \pm .01$ [0,3]
E14-6FB	#6	M3	.63 [16,00]	.28 [7,11]	.20 [5,08]	.49 [12,45]	.15 [3,81]
E14-8FB	#8	M4	.69 [17,53]	.31 [7,87]	.23 [5,84]	.53 [13,46]	.17 [4,32]
E14-10FB	#10	M5	.71 [18,03]	.34 [8,64]	.25 [6,35]	.55 [13,97]	.20 [5,08]

UL & CSA TOOLS
CT-100A CT-200 CT-600-A (CT-570CH) CT-1570 CT-2500 (CT-2570CH)

PANDUIT APPROVED TOOLS
CT-160 CT-260

NOTES:

- UL LISTED & CSA CERTIFIED FOR:
 - #16-14 AWG [1,5-2,5 mm²] SOLID OR STRANDED COPPER WIRE
 - 302°F [150°C] MAX OPERATING TEMPERATURE
 - 2000 VOLTS MAX
- MATERIAL:
 - STAMPING: .032" [0,8] THK COPPER, TIN PLATED
- WIRE STRIP LENGTH: 9/32" $\begin{matrix} +1/32 \\ -0 \end{matrix}$ [7,1mm $\begin{matrix} +0,8 \\ -0 \end{matrix}$]
- SEE WWW.PANDUIT.COM FOR PACKAGE QUANTITIES
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

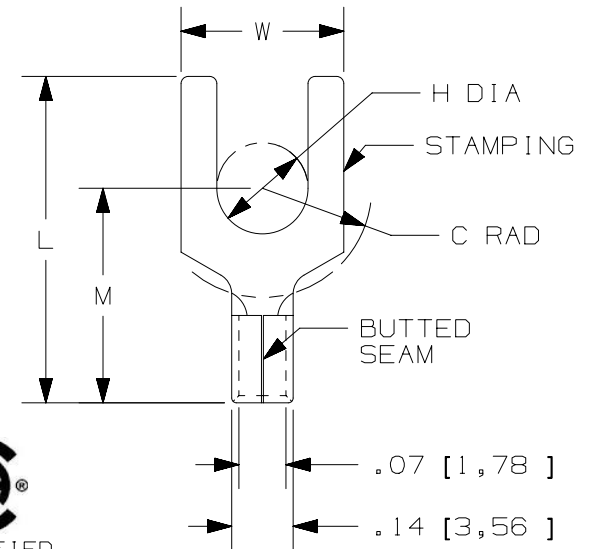

TITLE	
STRONGHOLD FORK TERMINAL NON-INSULATED, BUTTED SEAM #16-14 AWG CUSTOMER DRAWING	
ITEM REVISION NAME	00123SHL/00
DATASET FILE NAME	00123SHL_DC/00
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]	
.X ±	.XXX ±
.XX ±	ANGLES ±
THIRD ANGLE PROJECTION	
DRAWING NUMBER: SH41255	
DRAWN BY	DATE
JHNU	2/18
CHK	SCALE
TMR	NTS
SHEET 1 OF 1	
SIZE A	

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00	2/18	JHNU	TMR	RGB	RELEASED	00123SH

D10100DA/12