




Female cordset V93-G-YE4M-STOOW

- Thread 7/8 inch

Female cordset, 7/8", 3-pin, STOOW cable

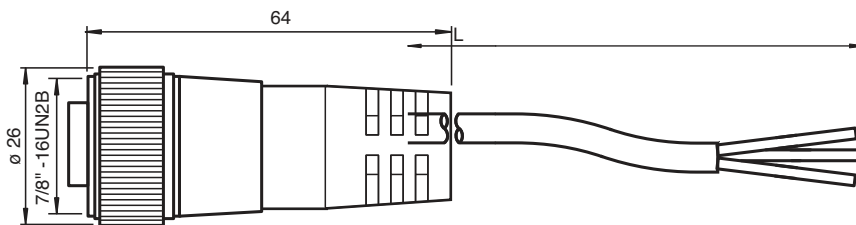

Technical Data

General specifications

Number of pins	3
Connection 1	socket
Construction type 1	straight
Threading 1	7/8 inch
Connection 2	cable end

Electrical specifications

Operating voltage	U_B	max. 600 V
Test voltage		1500 V
Operating current	I_B	13 A
Volume resistance		< 5 mΩ

Approvals and certificates

UL approval	cULus Listed, General Purpose
-------------	-------------------------------

Ambient conditions

Ambient temperature	-40 ... 105 °C (-40 ... 221 °F)
---------------------	---------------------------------

Mechanical specifications

Degree of protection	IP67
Material	

Release date: 2022-03-18 Date of issue: 2022-03-18 Filename: 912581_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PF PEPPERL+FUCHS

Technical Data

Contacts		Cu alloy gold plated
Body		PVC, yellow
Cable		PVC
Slotted nut		nickel-plated brass
Core insulation		PVC
Cable		fine-strand, flexible
Sheath diameter		Ø 9.9 mm
Bending radius		10 x cable diameter
Color		yellow
Cores		3 x 1.5 mm ² (16 AWG)
Length	L	4 m
Note		STOOW UL Standard

Connection



- 1) GN/YE
- 2) BK
- 3) WH

Release date: 2022-03-18 Date of issue: 2022-03-18 Filename: 912581_eng.pdf