


NOTES:

- 1) LABELS ARE M23053/5 ,WHITE. ACCEPTABLE SUBSTITUTION IS DAT-38-292 OR TRANSVINYL (DAT-63-292-2.5).
- 2) TERMINUS ENFACE REQUIREMENTS SHALL MEET GR-326 AND IEC 61300-3-35.
- 3) MAX IL @ 850 nm SHALL BE 0.5 dB PER CONNECTION.

REVISION HISTORY - ALL SHEETS ARE AT THE SAME REVISION			
REV	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	2017/11/13	

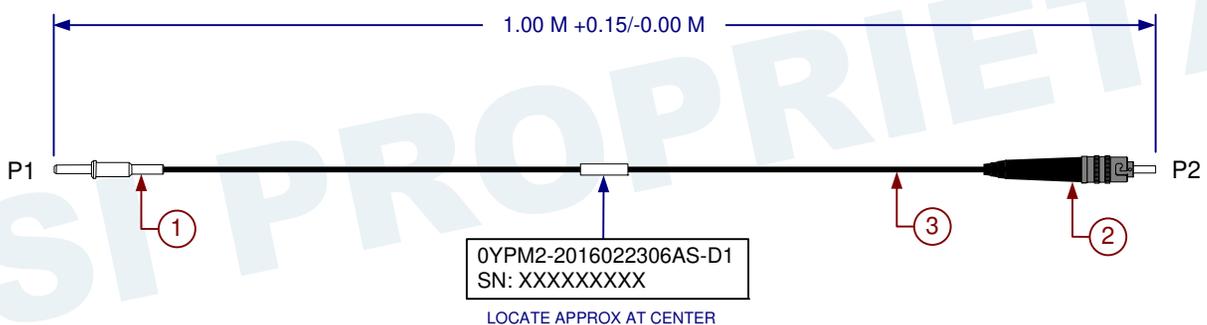

AFSI PROPRIETARY

4	AFSI-PRE T BOX	BOX, SMALL FIBER CABLE 10X10X2 W/AFSI GRAPHICS	1
3	SE001L202C0E-BI	CABLE,2.0mm 50um OM3 BEND INSENSITIVE P/N: SE001L202C0E-BIF	3.78 FEET
2	MSTC1100	ST CONNECTOR, MM 128UM (COMMERCIAL)	1
1	M29K1000	TERMINUS,PIN, M29504/04-4040 MM,.127MM, +.002/-0 FIBER HOLE	1
ITEM NO.	PART NO.	DESCRIPTION	QTY/ LENGTH

MATERIAL:		DFT/Designer: C. Hoang 2017/10/23	<b>Amphenol FSI</b>		
		Check By: B. Waite 2017/10/24			
		Manufacturing: B. Waite 2017/10/24			
		Market Manager/PLM: Q. Abraham 2017/10/25			
		Configuration Management: L. Brown 2017/11/13	TITLE: M29504/4 PIN TO ST CABLE ASSEMBLY, MM, 50/125um		
DRILLED HOLE DIAMETER TOLERANCE Ø.000 TO Ø.125 $\pm .001$ Ø.251 TO Ø.500 $\pm .002$ Ø.126 TO Ø.250 $\pm .001$ Ø.501 TO Ø.750 $\pm .002$		THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION IS PROHIBITED FROM DISCLOSURE TO OTHERS, PUBLICATION OR REPRODUCTION IN WHOLE OR IN PART WITHOUT WRITTEN PERMISSION FROM AMPHENOL FIBER SYSTEMS INTERNATIONAL. Copyright © 2017 Amphenol Fiber Systems International. Non published work. All rights reserved.			
DO NOT SCALE DRAWING UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOL ON ANGLES ±3° 1 PL ±.1 2 PL ±.02 3 PL ±.010 INTERPRET DIM AND TOL PER ASME 14.5M-1994		SIZE: A	CAGE CODE: OYPM2	DWG NO: 2016022306AS-D1	REV: -
APPLICATION		SCALE: NONE		SHEET 1 OF 1	