


P1: M-044

P2: M-048A

Customer No.: No.:1

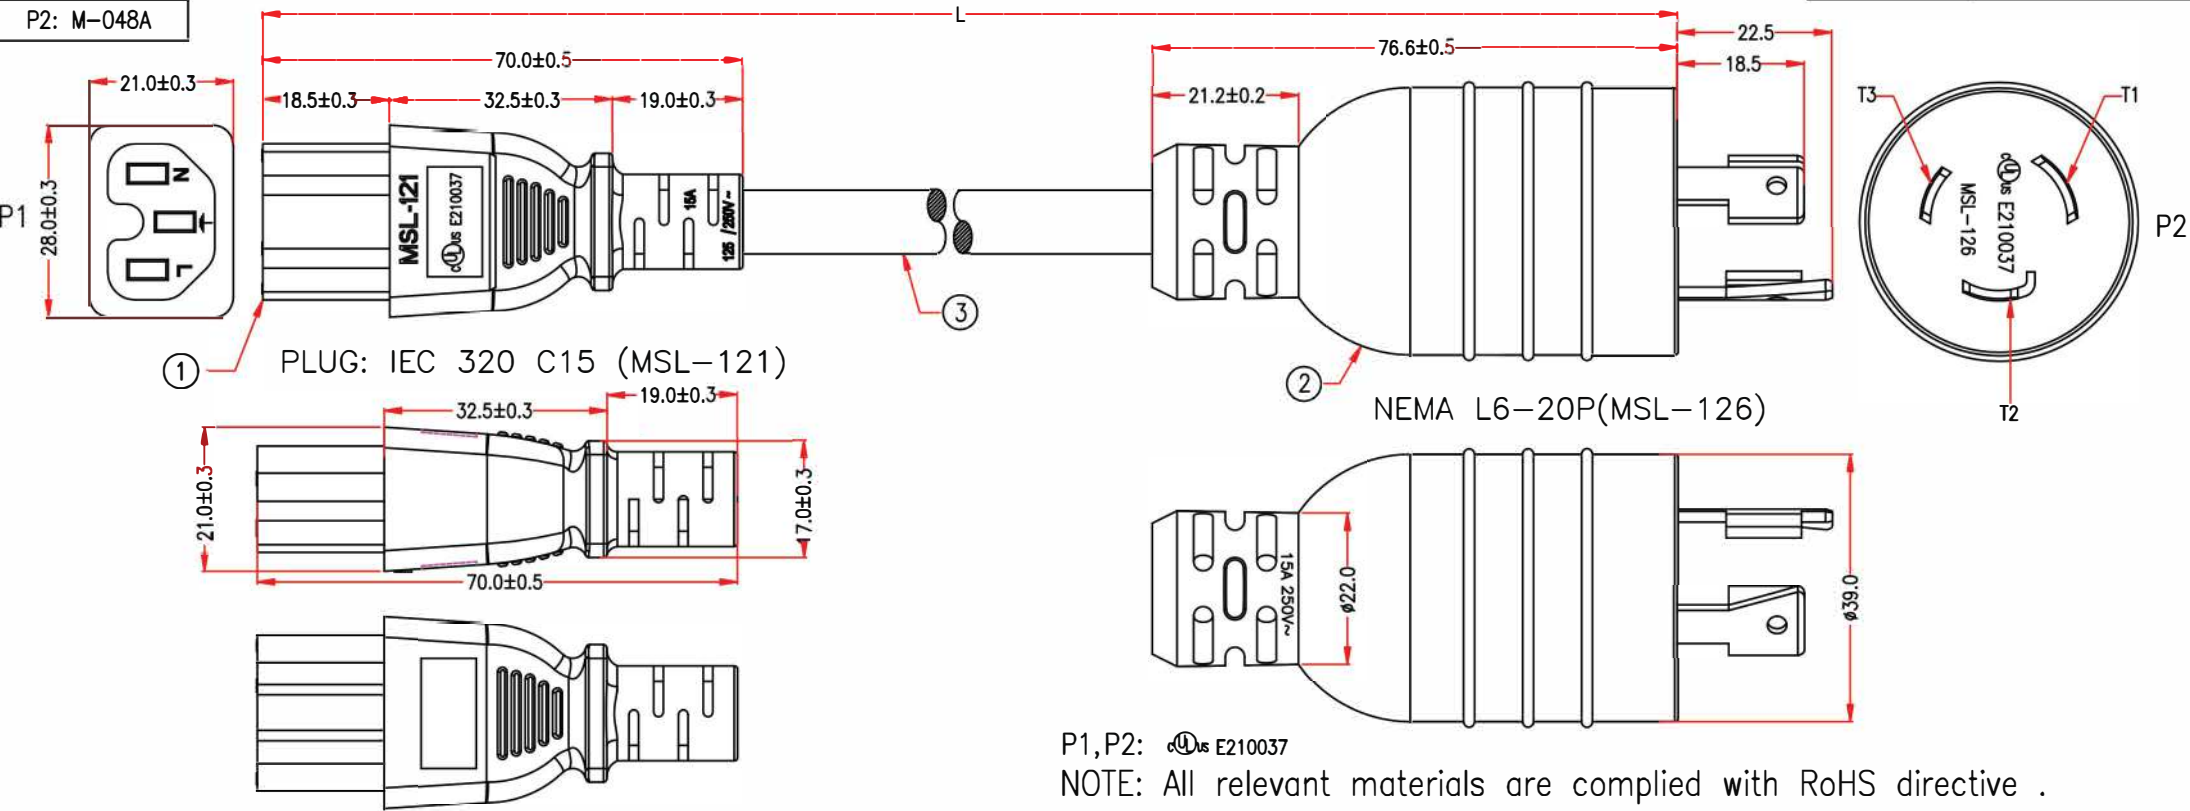

① PLUG: IEC 320 C15 (MSL-121)

② NEMA L6-20P(MSL-126)

P1,P2: E210037

NOTE: All relevant materials are complied with RoHS directive .
THE MARKING IS CONCAVE LETTERING MOULD

MARKING: (UL) SJT 3/C 14AWG(2.08MM²) VW-1 105°C 300V E204978
CSA SJT 3/C 2.08MM²(14AWG) FT2 105°C 300V 204790 MSL

P/N	LENGTH(Lmm)
10W1-L62015-06	1830mm
10W1-L62015-08	2440mm
10W1-L62015-10	3050mm
10W1-L62015-12	3658mm
10W1-L62015-15	4570mm

121126B2F14A(FP314-00)

P1	P2
BLACK L _____ T1	
WHITE N _____ T3	
GREEN E _____ T2	

3	UL SJT 14AWG x 3C, OD 9.3mm, JACKET BLACK, DRAWING No.EPSVT011403C-147	H5TC21-0304K09	L-20mm	M304
2	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09		M304
	BRACKET: YS-L6	A1QC58-0767	1	M767
	TERMINAL: 97656BL-0 (T3)	A1QB39-0257	1	M257
	TERMINAL: 97655BL-0 (T2)	A1QB41-0257	1	M257
1	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09		M304
	BRACKET:9745C	A1QC42-0767	1	M767
	TERMINAL:98745L	A1QB43-0257	3	M257
No.	DESCRIPTION	Q'TY	Supplier	

APPROVED					Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm
CHECKED	HU	07/APR/20	DRAWN NAME	POWER SUPPLY CORDS & CORDS SETS	
DRAWING	XJW	07/APR/20	PRODUCT NO.	PWCD-L620PC15-15A-XXF-BLK	
					UNIT: mm

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm