



| Date    | SYM | REVISION RECORD  | AUTH | DR. | CK.  |
|---------|-----|--|------|-----|------|
| 6/28/13 | A   | RE-DRAWN IN AUTOCAD<br>UPDATED TO ROHS 2 COMPLIANT           | T.B. |     | B.S. |
| 6/02/17 | B   | DIM. 150.0 WAS 152.4<br>DIM. 5.0 WAS 3.18<br>ADDED MORE DIM. | T.B. |     | B.S. |
| 7/07/17 | C   | ADDED DIM. 5.20  | T.B. |     | B.S. |
| 7/17/17 | D   | UPDATED MOUNTING INSTRUCTION                                 | T.B. |     | B.S. |

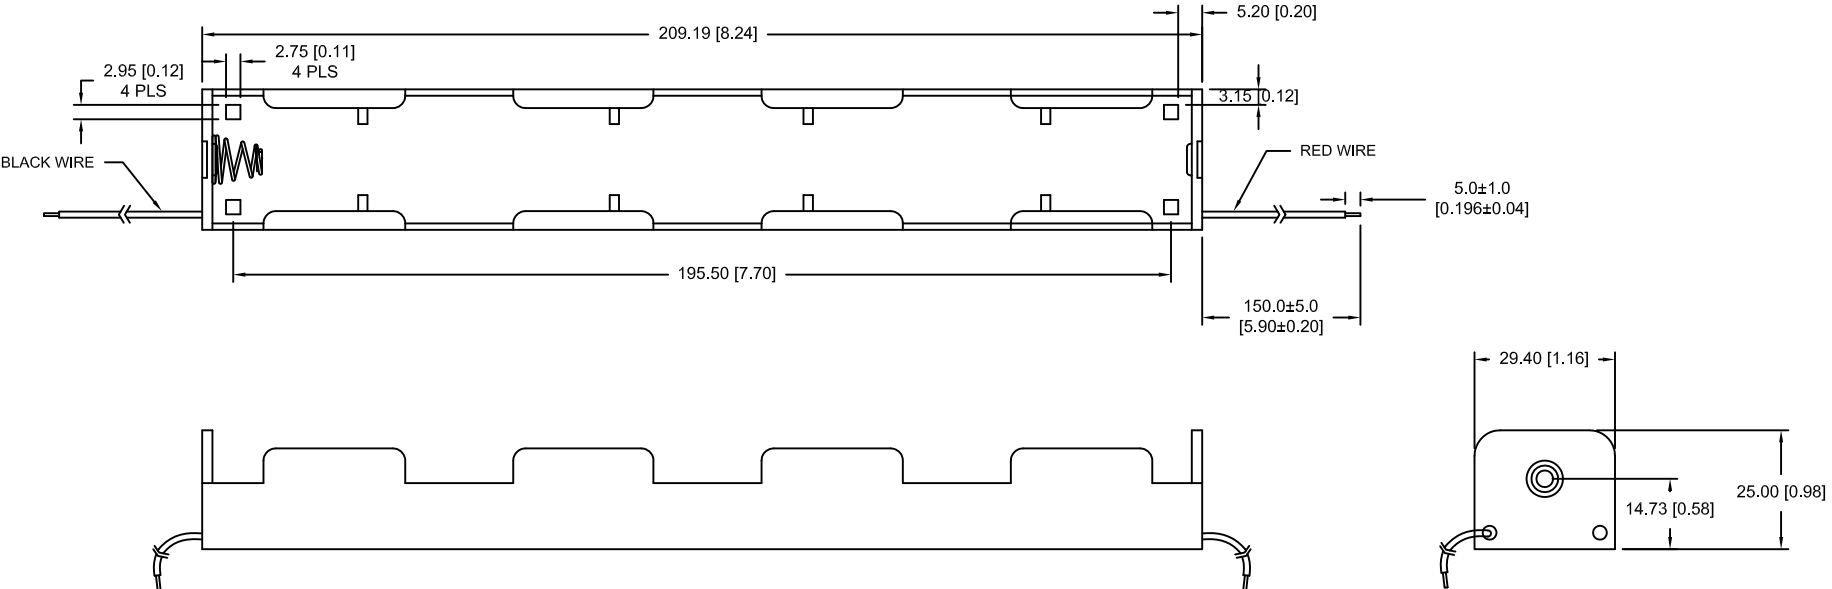

**SPECIFICATIONS**

Plastic material - Polypropylene  
 Flammability Rating -UL94-HB, UL File NO. E216959  
 Temperature Range: -10°C to +100°C  
 Springs - Nickel Plated Spring Steel  
 Wire: 26AWG, UL1007, CSA, TR64, 300V, 80°C  
 Rivets - Brass, Nickel Plated  
 CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER EIA-540J000  
 ROHS 2 COMPLIANT

Mounting Instruction:  
 Use 4-40 machine screws.  
 also adhesives and double sided tapes work well.

|                                |   |                          |                  |
|--------------------------------|---|--------------------------|------------------|
| Tolerance<br>(Except as noted) |  <b>Memory Protection Devices, Inc</b><br>200 Broad Hollow Road, Farmingdale, New York 11735 | Scale                    | Drawn By T.S.    |
|                                |   | XX                       | Approved By T.B. |
| decimal<br>±.5 (.020)          | Title<br>FOUR "C" CELL HOLDER WITH WIRE LEADS   |                          |                  |
| Fractional<br>± .8 (.030)      | Date<br>07/17/17  | Drawing Number<br>BH14CW |                  |