
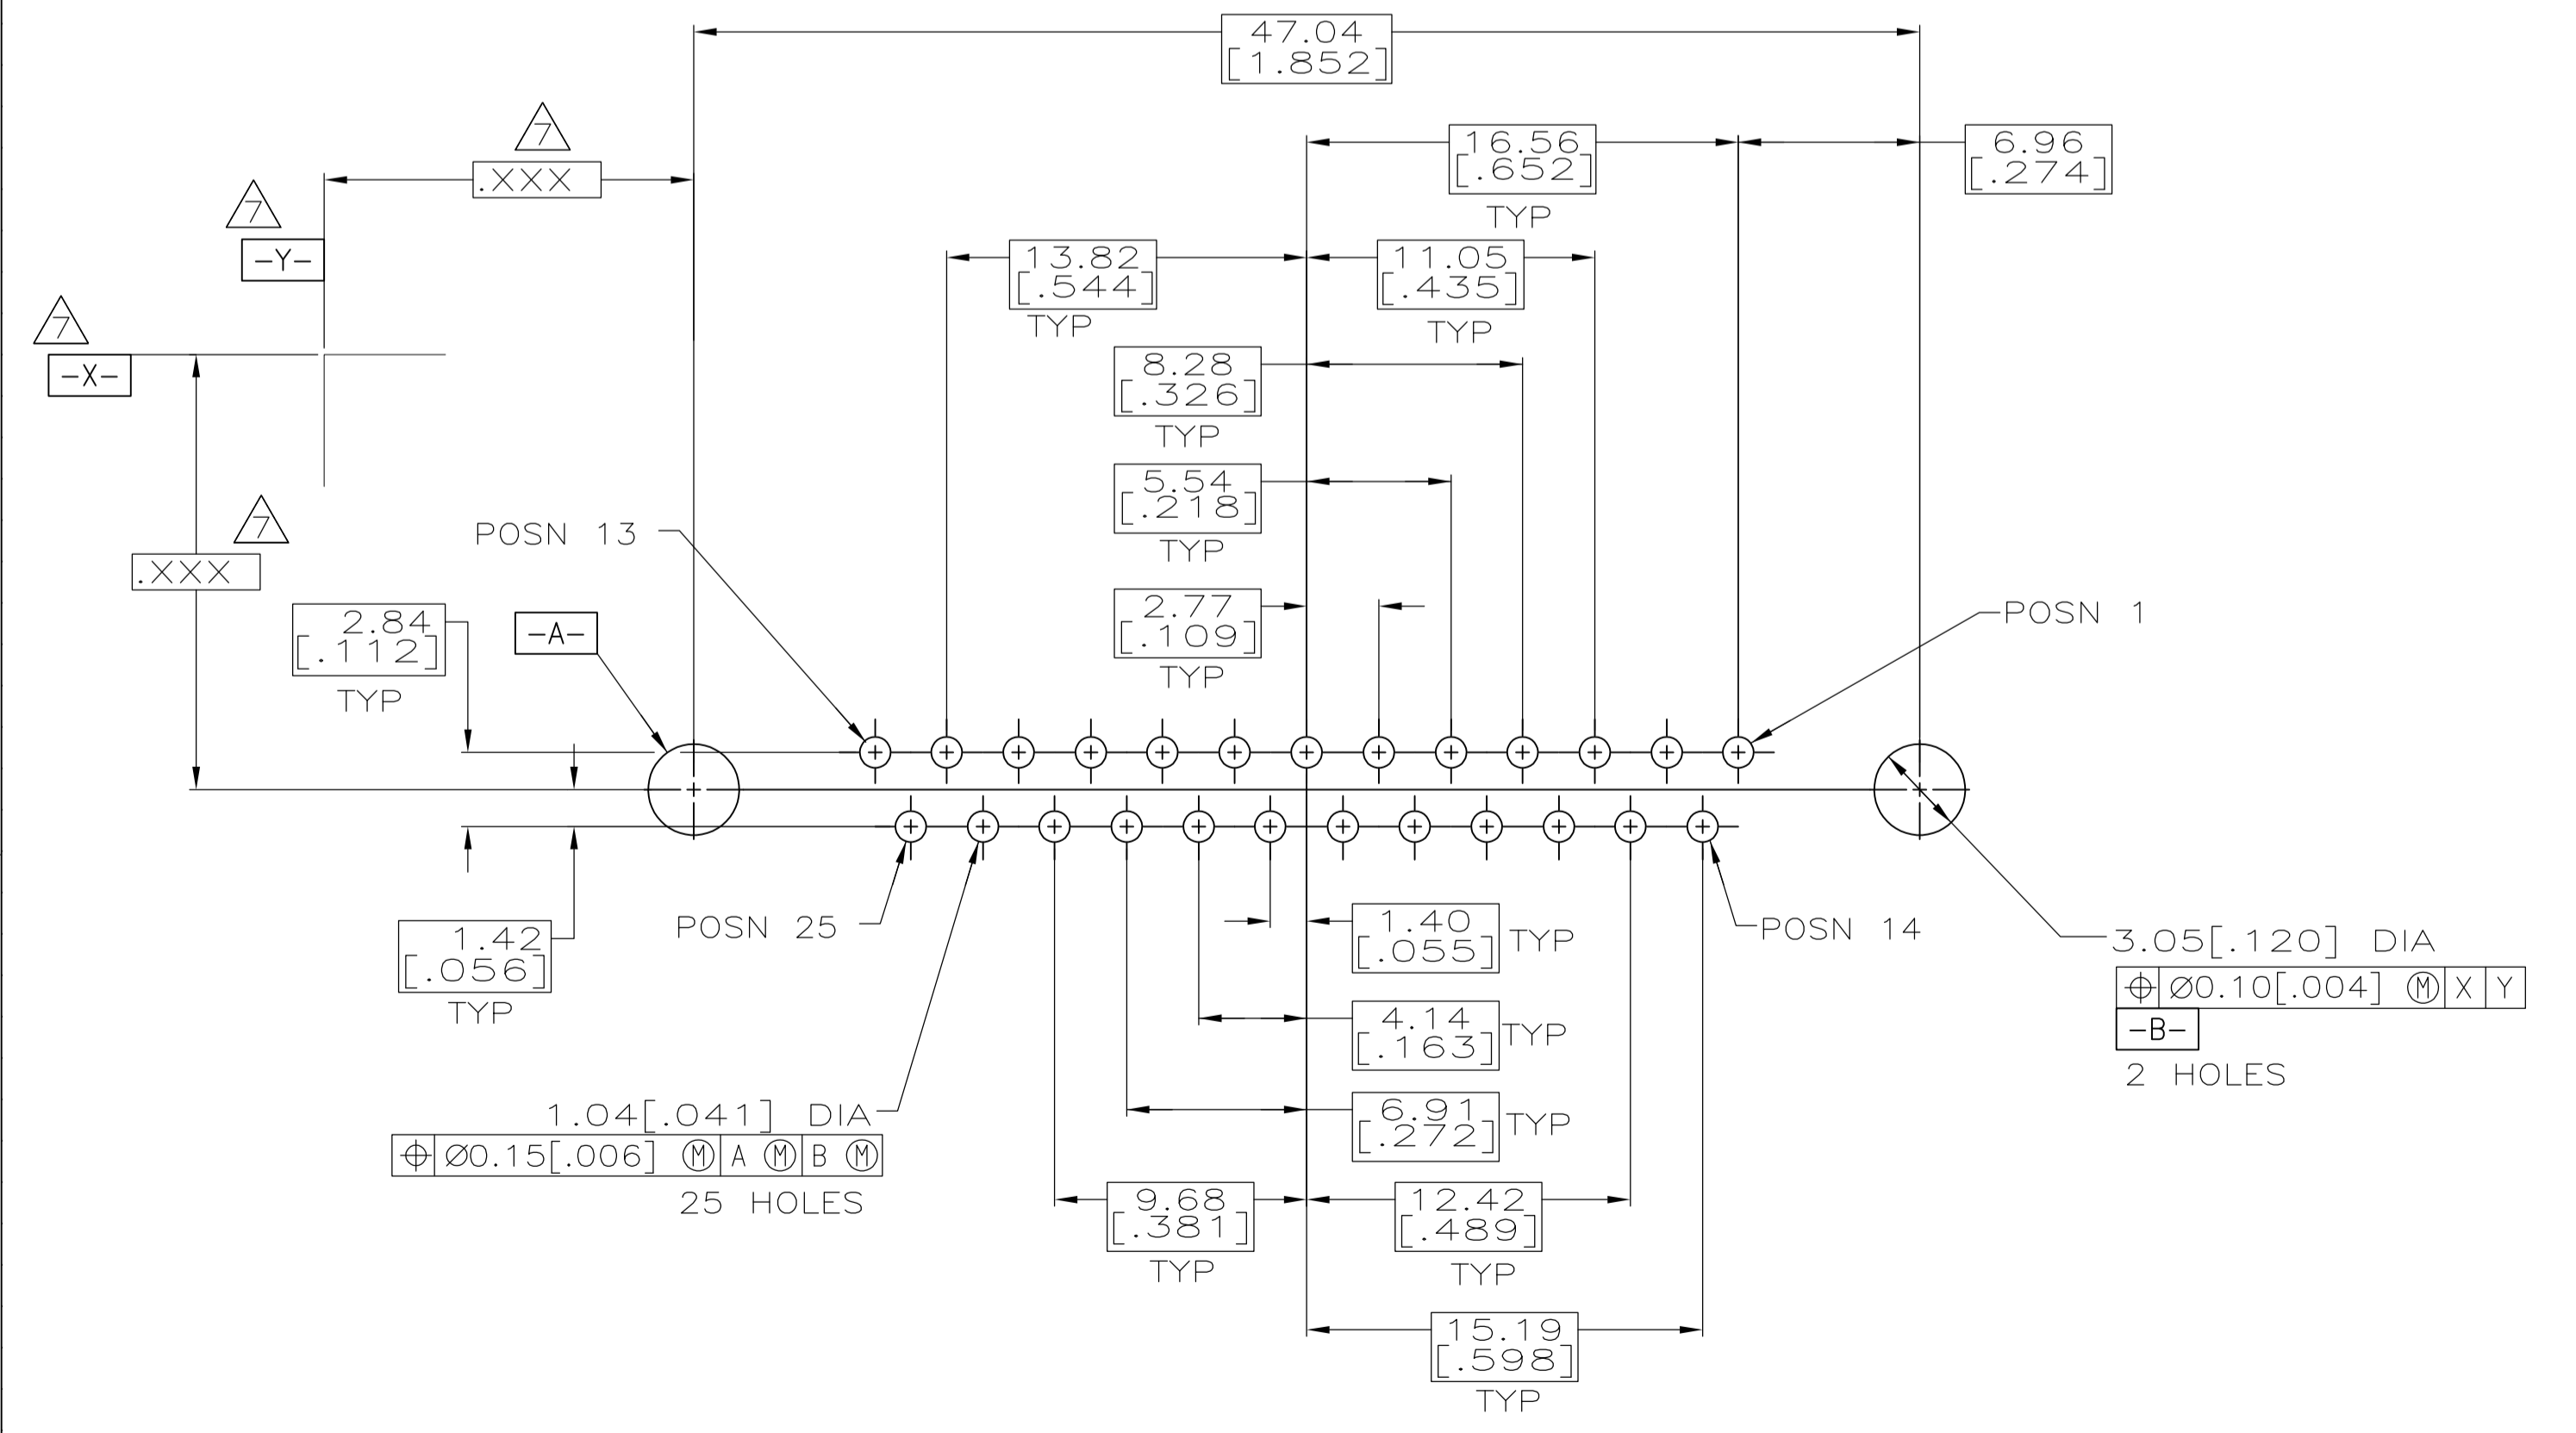
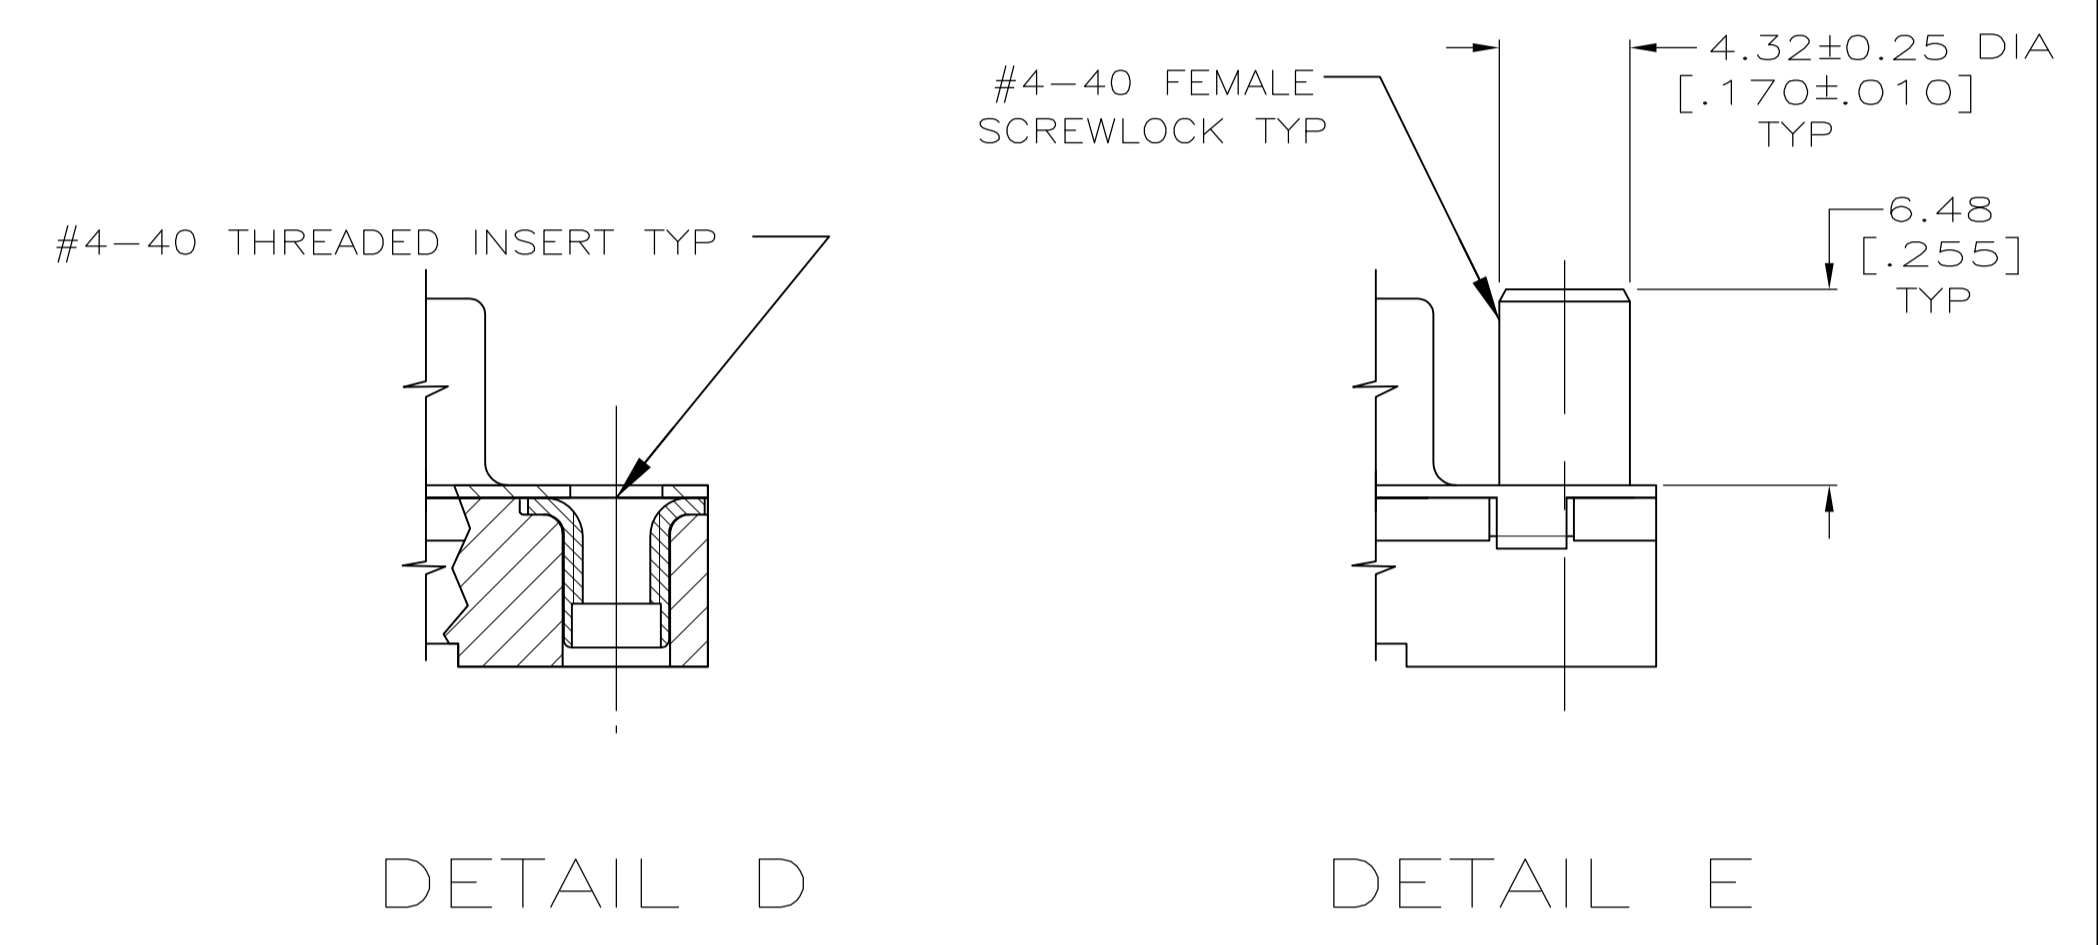
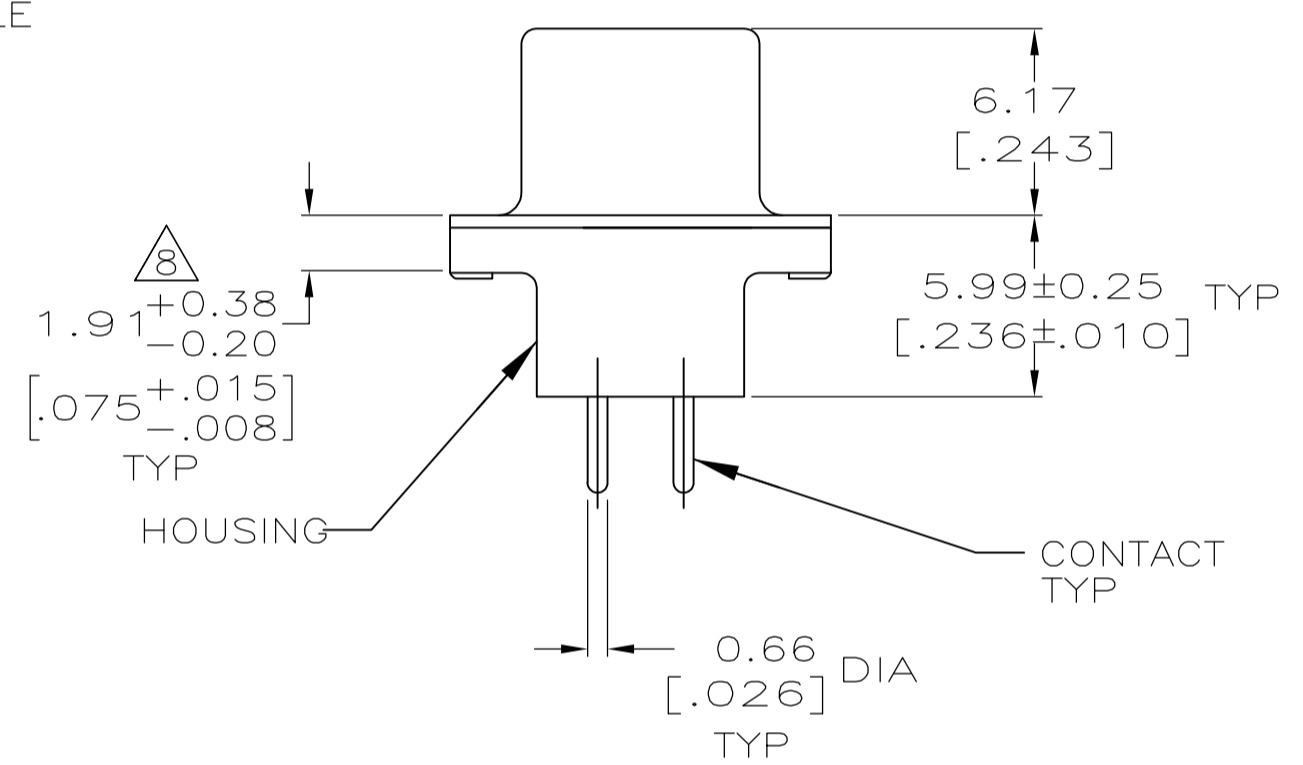


- △ HOUSING; POLYESTER, UL 94V-0 RATED, BLACK.
- △ SHELL; CARBON STEEL.
- △ SHELL; 5.08um [.000200] MIN TIN OVER 2.54um [.000100] MIN COPPER.
- △ GOLD FLASH FOR A LENGTH OF 2.54[.100] MIN FROM MATING END, 2.54um [.000100] MIN TIN OR TIN-LEAD ON OPPOSITE END, BOTH OVER 1.27um [.000050] MIN NICKEL.
- △ 0.76um [.000030] MIN GOLD FOR A LENGTH OF 2.54 [.100] MIN FROM MATING END, 2.54um [.000100] MIN TIN OR TIN-LEAD ON OPPOSITE END, BOTH OVER 1.27um [.000050] MIN NICKEL.
- 6. NOTE DELETED.
- △ DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- △ 2.79[.110] MAX IN SHELL TAB CLINCH AREAS.
- △ OBSOLETE PART NUMBER.
- △ 10 SUPERSEDED BY 745967-2.
- △ 11 SUPERSEDED BY 745967-4.
- △ 12 SUPERSEDED BY 1-745967-4.
- △ 13 SUPERSEDED BY 745967-7.
- △ 14 CONTACTS: POSPHOR BRONZE.
- △ 15 SCREWLOCKS: ZINC.
- △ 16 INSERTS: BRASS.

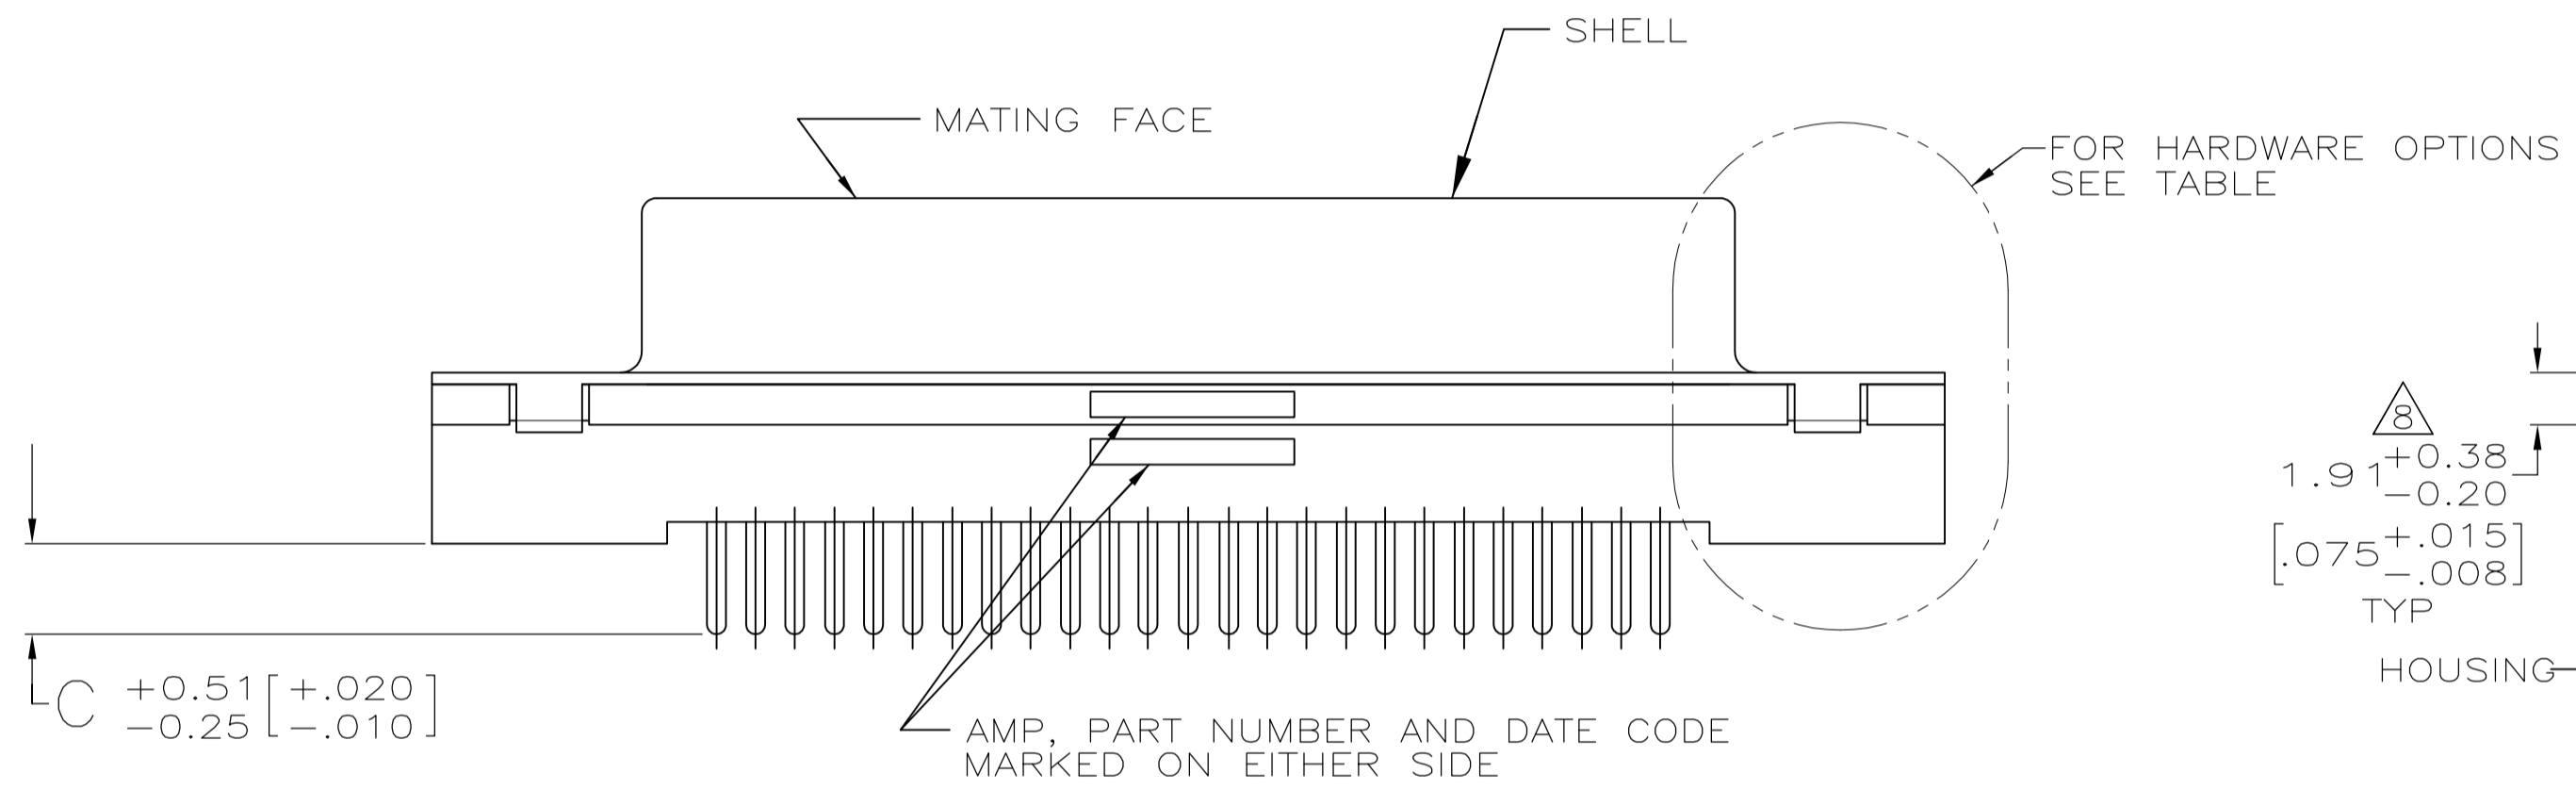

W/THREADED INSERTS PER DETAIL D	△5	1.27 [.050]	△9 1-745967-9
W/FEMALE SCREWLOCKS PER DETAIL E	△5	4.32 [.170]	△9 1-745967-6
	△4	4.32 [.170]	△9 1-745967-5
W/THREADED INSERTS PER DETAIL D	△5	3.18 [.125]	1-745967-4
	△4	3.18 [.125]	△12 1-745967-3
	△4	6.35 [.250]	△9 1-745967-1
	△5	4.32 [.170]	1-745967-0
W/O FEMALE SCREWLOCKS OR THREADED INSERTS AS SHOWN	△4	4.32 [.170]	△12 745967-9
	△5	3.18 [.125]	745967-8
	△4	3.18 [.125]	745967-7
	△5	6.35 [.250]	△9 745967-6
HARDWARE OPTIONS	△5	4.32 [.170]	745967-4
	△4	4.32 [.170]	△11 745967-3
	△5	3.18 [.125]	745967-2
	△4	3.18 [.125]	△10 745967-1
	CONTACTS		PART NO
	FINISH	C	

RECOMMENDED PC BOARD MOUNTING DIMENSIONS

THIS DRAWING IS A CONTROLLED DOCUMENT. **STE** TE Connectivity

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN D BROCKWAY 3-22-93	APVD R STONE 5-10-93
0 PLC ± -	1 PLC ± -	PRODUCT SPEC 108-40025	NAME
2 PLC ± .013 [.005]	3 PLC ± -	APPLICATION SPEC 114-40023	SIZE
4 PLC ± -	ANGLES ± -	WEIGHT	SCALE 4:1
MATERIAL	FINISH	RECEIPTACLE ASSY, SIZE 3, 25 POSITION FRONT METAL SHELL, WITH OR WITHOUT SCREWLOCKS OR INSERTS.	SHEET 1 OF 1
CONTACTS: SEE TABLE	CUSTOMER DRAWING	00779C=745967	REV R1