

# 3-Phase Diode Bridge

# DF100NB160

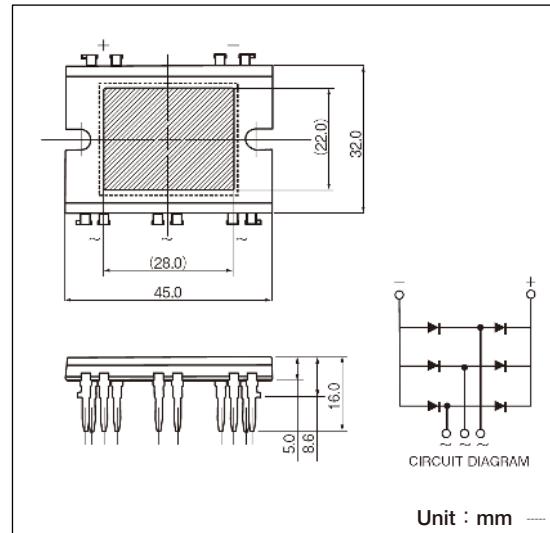
UL; E76102

## Features

- Power cycle capability (Long-term reliability) is 3 times better than before thanks to the use of "Transfer Molding Package" (at  $\Delta T_j = 100^\circ\text{C}$ )
- Volume ratio of 1/10, footprint size 1/2 compare to our existing product
- Reduced thermal resistance with unique internal structure and copper heat plate
- Dual terminals for high capability and reliable solder contacts

## Applications

- Packaged Air Conditioner / Motor Drives / Servo Controller / Battery Charger / Power Supply



Unit : mm

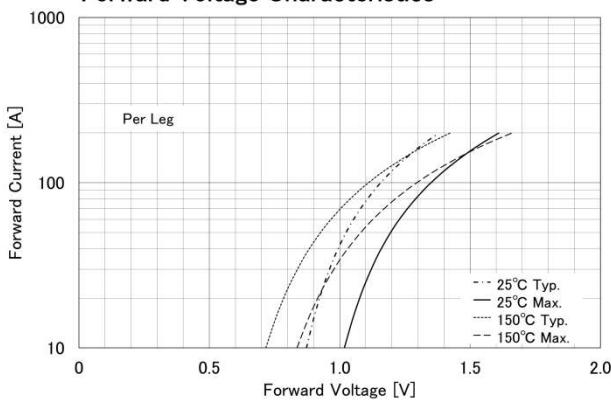
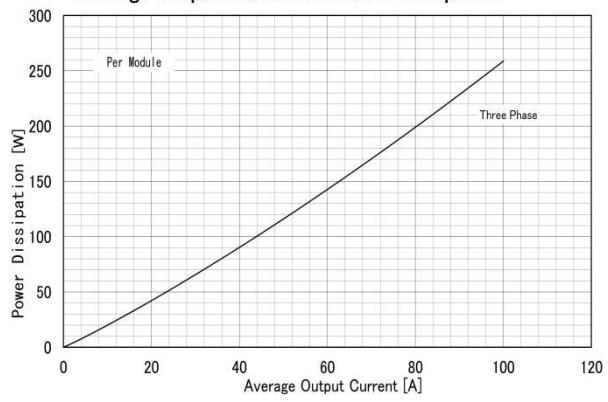
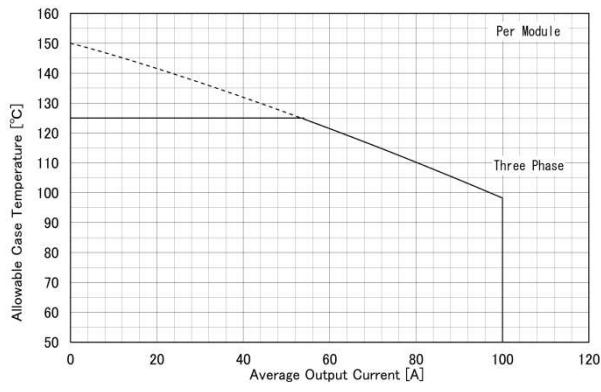
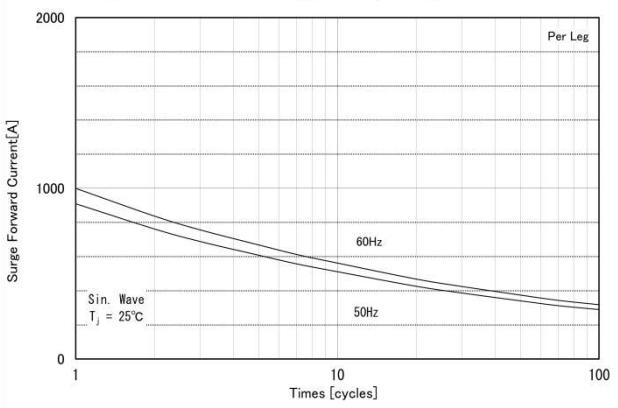
## Maximum Ratings ( $T_j=25^\circ\text{C}$ unless otherwise specified)

Item	Symbol	Unit	DF100NB160	
Repetitive Peak Reverse Voltage	$V_{RRM}$	V	1600	
Non-Repetitive Peak Reverse Voltage	$V_{RSM}$	V	1700	

Item	Symbol	Unit	Ratings	Conditions
Average Output Current	$I_D$	A	100	Three Phase Full Wave, $T_c=98^\circ\text{C}$
Surge Forward Current	$I_{FSM}$	A	910/1000	50/60Hz Sin.Wave,Peak Value, Non-Repetitive
$I^2t$ (for fusing)	$I^2t$	$\text{A}^2\text{s}$	4100	50/60Hz Sin.Wave
Isolation Voltage	$V_{ISO}$	V	2500	AC,RMS,1min
Operating Junction Temperature	$T_j$	$^\circ\text{C}$	-40~+150	
Storage Temperature	$T_{stg}$	$^\circ\text{C}$	-40~+125	
Mounting Torque(M4)	—	N·m	1.5	Recommended Value 1.0~1.4
Weight	—	g	24	Typical Value

## Electrical Characteristics ( $T_j=25^\circ\text{C}$ unless otherwise specified)

Item	Symbol	Unit	Ratings			Conditions
			Min.	Typ.	Max.	
Reverse Current	$I_R$	mA		4.5	8.0	$T_j=T_{jmax}, V_R=V_{RRM}$ , Per Leg
Forward Voltage	$V_F$	V		1.16	1.35	$I_F=100\text{A}$ , Per Leg
Threshold Voltage	$V_{(TO)}$	V		0.9	1.0	$T_j=25^\circ\text{C}$
				0.7	0.9	$T_j=T_{jmax}$
Forward Slope Resistance	$r_T$	$\text{m}\Omega$		2.8	3.2	$T_j=25^\circ\text{C}$
				3.9	4.5	$T_j=T_{jmax}$
Thermal Resistance	$R_{th(j-c)}$	$^\circ\text{C}/\text{W}$		0.20	Junction to Case (Per Module)	
				0.14	Case to Fin (Per Module)	
	$R_{th(c-f)}$	$^\circ\text{C}/\text{W}$			Thermal conductivity (Si grease) $=9 \times 10^{-3} [\text{W}/\text{cm}\cdot^\circ\text{C}]$	

**Forward Voltage Characteristics****Average Output Current vs. Power Dissipation****Average Output Current vs. Allowable Case Temperature****Surge Forward Current Rating (Non-Repetitive)****Transient Thermal Impedance**