
THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES,
ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED
WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES.
ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

ALL DIMENSIONS ARE REFERENCE ONLY

PAR	RFE-6101			
REV	DESCRIPTION	DWN	DATE	APPROVED
_	ENGINEERING RELEASE	CZS	04/06/09	JDMc

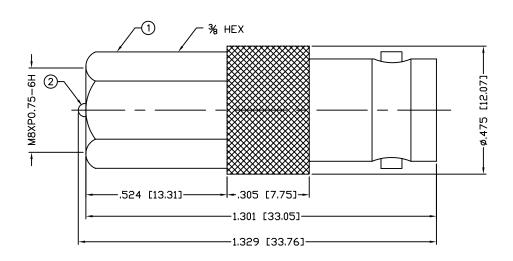

SPECIFICATIONS:

IMPEDANCE: 50 Ohms

FREQUENCY RANGE: 0-2 GHz WORKING VOLTAGE: 335 Vrms

INSULATION RESISTANCE: 5k M ohms min. TEMPERATURE RANGE: -65° C TO $+85^{\circ}$ C

14 13 12 11			000494					1 11 1		SAN (85)	O MIRAMAF I DIEGO, CA 8) 549-63 8) 549-63	4 92126 340
9 8 7						TUANT	F			TO BNC	JAC	CK
5			DRAWN C. ZUNIGA	04/06/09	DIMENSIONS ARE IN INCHES AND [MILLIMETERS] UNLESS OTHERWISE NOTED		ADAPTER					
3 INSULATOR 2 CONTACT/PIN	1 PTFE 1 BRASS		CHECKED ORJ DRAWN	04/06/09	TOLERANCES /		SIZE	CABLE GROUP	ΆΙ	RFE-61		REV —
1 BODY # DESCRIPTION	1 BRASS QTY MATERIAL	NICKEL, 100μ" FINISH	C. ZUNIGA APPROVALS	DATE			SCALE:	NTS	CAD FIL	E OUTLINE	SHEET 1	OF 1