

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91 929

SWITCH - BASIC

CATALOG LISTING

V3-370

CK-D3469

REPLACES X101481-V3

RELEASE NO. PR-22590

CHECK

CATALOG LISTING
V3-370
PAGE 1 OF 1

ISSUE

2

CHECK

REVISIONS

A 0005782

RJ
04 JUN 04

CHECK

04 JUN 04



AK

CHECK

15 JAN 97

DCS

DDM/CAD
DRAWN

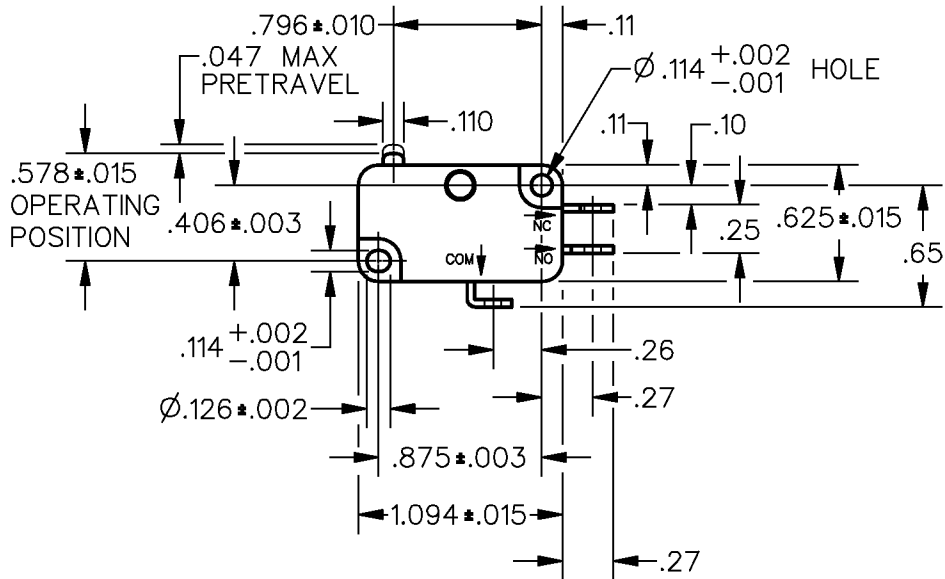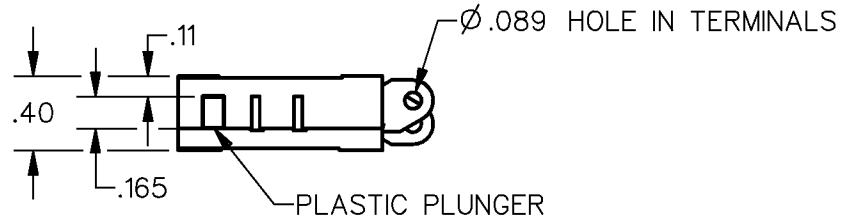


NOTES

- 1 - TERMINALS ARE PLATED FOR SOLDERING
- 2 - IN INSPECTION, DO NOT BURN OUT - GOLD CONTACTS
- 3 - IN INSPECTION, DO NOT EXCEED 10 VDC, .1A RESISTIVE LOAD
- 4 - INSPECT SWITCH RESISTANCE PER CONTROL PLAN

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
OPERATING FORCE --- 150 GRAMS MAX	CONTACT ARRANGEMENT S P D T	ONE PLACE (.0)	± .030
RELEASE FORCE --- 25 GRAMS MIN		TWO PLACE (.00)	± .015
DIFFERENTIAL TRAVEL --- .002-.010	L22 1A 125 VAC	THREE PLACE (.000)	± .005
OVERTRAVEL --- .050 MIN		ANGLES	±
FREE POSITION --- .625 MAX		WEIGHT	
RELEASE TRAVEL --- .010 MIN			

