

AMP+ HVP800

TE Internal #: 1-2177053-1 Housing for Male Terminals, Wire-to-Wire, 2 Position, .9 in [23 mm] Centerline, Sealable, Orange, Wire & Cable, Signal, AMP+ HVP800 View on TE.com >



Connectors > Automotive Connectors > Automotive Housings



Connector & Housing Type: Housing for Male Terminals

Mating Pin Diameter: 8 mm [.314 in]

Connector System: Wire-to-Wire

Number of Positions: 2

Centerline (Pitch): 23 mm [.9 in]

Features

Product Type Features

Cable Exit Angle	180°				
Body Features					
Nominal Voltage Architecture	12 V, 24 V, 42 V, 48 V, 80 V, 90 V, 125 V, 240 V, 500 V, 550 V, 600 V				
Operating Voltage	850 VDC				
Electrical Characteristics					
Number of Rows	1				
Number of Positions	2				
Configuration Features					
Connector & Contact Terminates To	Wire & Cable				
Hybrid Connector	No				
Sealable	Yes				
Connector System	Wire-to-Wire				
Connector & Housing Type	Housing for Male Terminals				
Connector Shape	Rectangular				

C For support call+1 800 522 6752

Housing for Male Terminals, Wire-to-Wire, 2 Position, .9 in [23 mm] Centerline, Sealable, Orange, Wire & Cable, Signal, AMP+ HVP800



Primary Product Color	Orange
Connector & Keying Code	A
Contact Features	
Contact Size	8mm
Contact Type	Pin
Mating Pin Diameter	8 mm[.314 in]
Mechanical Attachment	
Terminal Position Assurance	No
Strain Relief	Without
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Material	PAGF
Centerline (Pitch)	23 mm[.9 in]
Dimensions	
Connector Height	57.3 mm[2.25 in]
Product Width	92.5 mm[3.64 in]
Product Length	85 mm[3.34 in]
Usage Conditions	
Operating Temperature (Max)	140 °C[284 °F]
Operating Temperature Range	-40 – 140 °C[-40 – 284 °F]
Operation/Application	
Circuit Application	Signal
Industry Standards	
Degree of Protection	IP6K9K
Packaging Features	
Packaging Quantity	18
Packaging Method	Box
Other	
Serviceable	No

Housing for Male Terminals, Wire-to-Wire, 2 Position, .9 in [23 mm] Centerline, Sealable, Orange, Wire & Cable, Signal, AMP+ HVP800



Connector Position Assurance Capable

Yes

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUL 2021 (219) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




Housing for Male Terminals, Wire-to-Wire, 2 Position, .9 in [23 mm] Centerline, Sealable, Orange, Wire & Cable, Signal, AMP+ HVP800



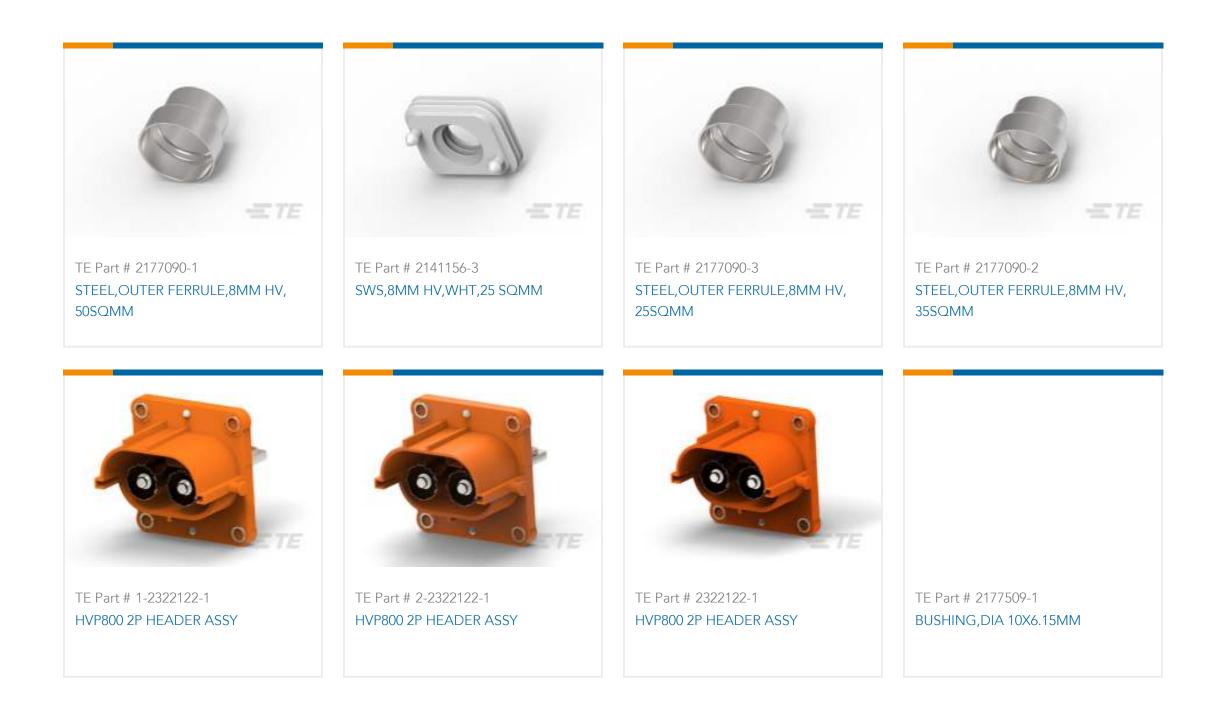

Also in the Series AMP+ HVP800

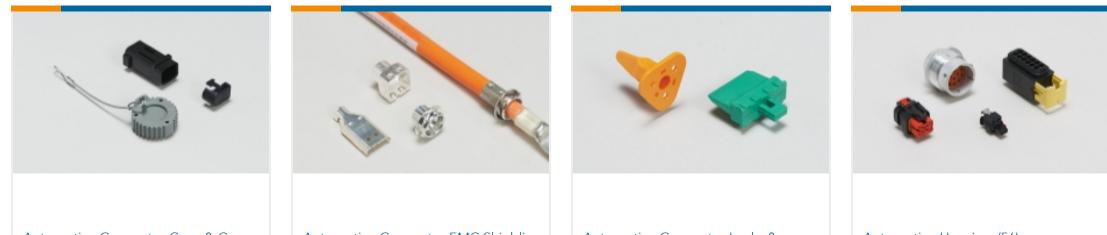


Automotive Connector Caps & Covers (11)	Automotive Connector EMC Shielding (10)	Automotive Connector Locks & Position Assurance(1)	Automotive Housings(56)
A CONTRACTION OF THE SECOND OF			

Automotive Terminals(6)

Connector Seals & Cavity Plugs(5)

Electric, Hybrid & Fuel Cell Cable Assemblies(10)

High Voltage Wire Processing Equipment(25)

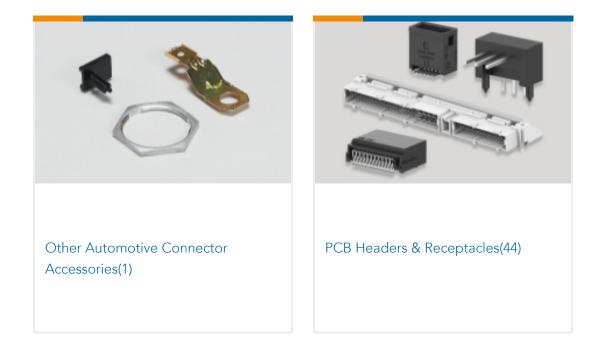


Customers Also Bought

C For support call+1 800 522 6752

Housing for Male Terminals, Wire-to-Wire, 2 Position, .9 in [23 mm] Centerline, Sealable, Orange, Wire & Cable, Signal, AMP+ HVP800



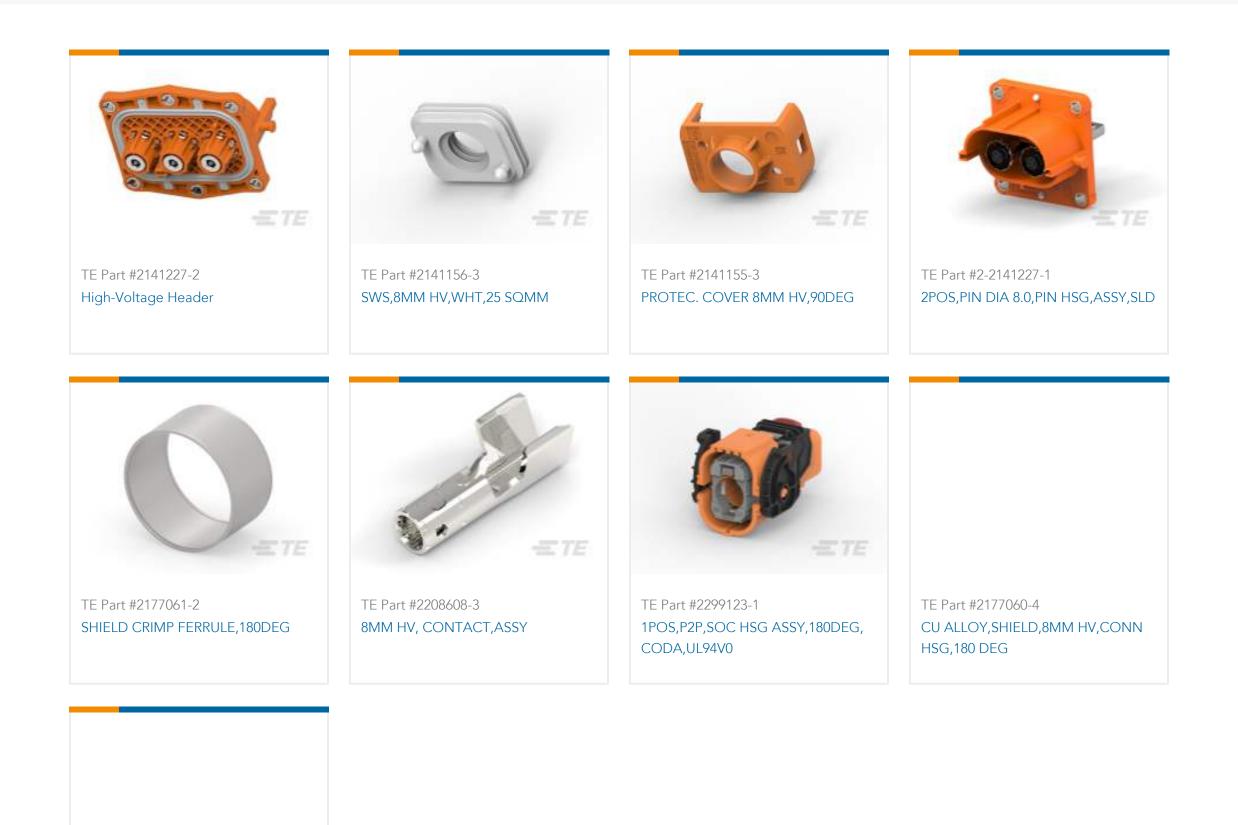

TE Part #2328075-3 8MM HV,TERMINAL,HEX CRIMP, 180DEG,50 SQMM

Documents

Product Drawings 2POS,8MM HV,PLUG HSG,ASSY,SEALED

English

2POS,8MM HV,PLUG HSG,ASSY,SEALED

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-2177053-1_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1-2177053-1_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-2177053-1_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

C For support call+1 800 522 6752

Housing for Male Terminals, Wire-to-Wire, 2 Position, .9 in [23 mm] Centerline, Sealable, Orange, Wire & Cable, Signal, AMP+ HVP800



Product Specifications Application Specification

English