
023 Copyright 2023 HIROSE ELECTRIC CO., LTD. All Rights Reserved. ector

GT10 Series

— ECU Interface Connectors —

<2 mm Pitch>

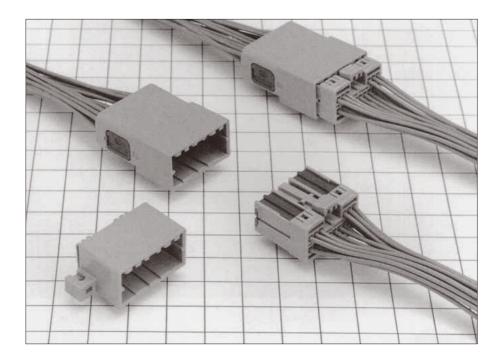


Features

- Usable with existing 040 connectors.
- Front retainer design prevents incomplete insertion.

■ F Connectors

Terminal

Aug.1.2023 Copyright 2023 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

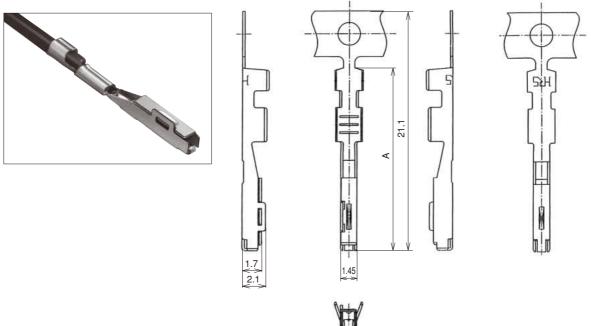

Part No.	HRS No.	Material	Plating	Conductor Size (AWG)	Outer Diameter	A Dimension	Packaging	RoHS
GT10-2022SCF	760-0003-0	Connor nollow	Tip ploting	20 to 22 AWG	φ 1.1 to 1.3	16.1	10 000 === (===	YES
GT10-2428SCF	760-0009-6	Copper palloy	Tin plating	24 to 28 AWG	φ 0.8 to 1.1	15.1	10,000 pcs/reel	YES

Housing (with Retainer Provisionally Mounted)




HRS No.

760-0002-7

Part No.

GT10-16DS-HU

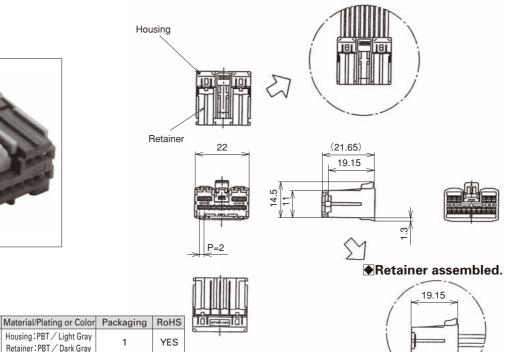

●Retainer assembled.


Note: This product has the retainer provisionally mounted to the housing. To use, fully mount the retainer at the specified position after the terminals have been inserted.

Housing:PBT / Light Gray

Retainer: PBT / Dark Gray

GT10S Series with cover case

Housing

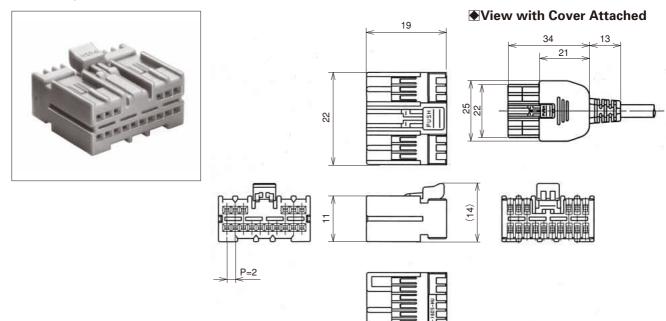



Part No.	HRS No.	Color	Material	Packaging	RoHS
GT10S-16DS-HU	760-0007-0	Light Gray	PBT	1	YES

Note: This product should be used with the cover attached to the housing.

Cover







Cover A

Cover B

Part No.	HRS No.	Color	Material	Packaging	RoHS
GT10S-16DS-CV	760-0008-3	Black	PC	1	YES

Note 1: This product can be used with cables having outside diameters of 4, 4.8, and 5.2 mm. Please use as a set in conjunction with clamp fittings and bushings that suit the cable.


Note 2: This product is sold as a set with cover A, B, and screws.

Clamp Fittings





Part No.	HRS No	Material	A Dimension	B Dimension	Outer diameter of the cable	Packaging	RoHS
MQ138-CM (4.0)	206-0891-7		9	5.5	φ 4.0		
MQ138-CM (4.8)	206-0684-2	Brass	11.3	5.6	φ 4.8	1	YES
MQ138-CM (5.2)	206-0664-5		12	5.6	φ 5.2		




Bushings

Aug.1.2023 Copyright 2023 HIROSE ELECTRIC CO., LTD. All Rights Reserved.




Part No.	HRS No.	Color	Material	Outer diameter of the cable	Packaging	RoHS
MQ138-BS (4.0) (01)	206-0890-4 01			φ 4.0		
MQ138-BS (4.8) (01)	206-0683-0 01	Black	PCV	φ 4.8	1	YES
MQ138-BS (5.2) (01)	206-0662-0 01			φ 5.2		



M Connectors

Terminal



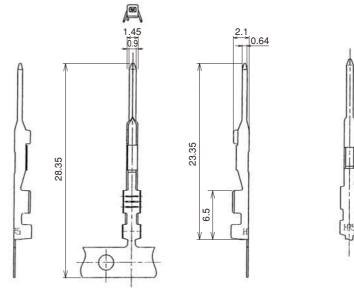



Part No.	HRS No.	Material	Plating	Conductor Size (AWG)	Outer Diameter	Packaging	RoHS
GT10-2022PCF	760-0006-8	Brass	Tin plating	20 to 22 AWG	φ 1.1 to 1.3	10,000 pcs/reel	YES

Housing

Part No.







	GT10-16DP-R Retainer
*	netaillei

GT10-16DP-HU | 760-0004-2 | Light Gray PBT Note: This product has a retainer provisionally attached to the housing. At time of use, install the retainer all the way to the specified position after the terminal has been inserted.

Material Packaging RoHS


Retainer (Only for GT10-16DP-HU)

HRS No.


Color



Part No.	HRS No.	Color	Material	Packaging	RoHS
GT10-16DP-R	760-0005-5	Dark Gray	PBT	1	YES



Board Type

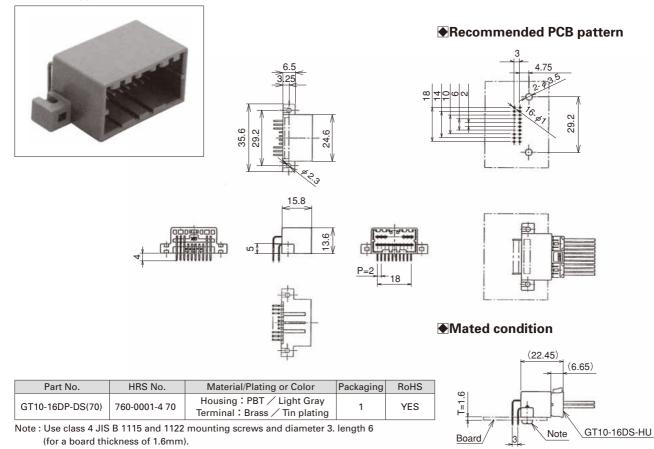

Crimping tools

Aug.1.2023 Copyright 2023 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

User manuals are available. Please contact your Hirose Electric account representative.

Automatic Crimping Machine



Specifications

Item	Specification	Remarks
Press capacity	1.5tons	
Stroke Length	30mm	_
Number of strokes	200spm (50Hz)	240spm (60Hz)
Weight	75kg	
Motor	0.2kw	AC100V
Crimping speed	2,000 to 4,000 pcs/hour	

Harness tool

Terminal Part No.	Terminal HRS No.	Tool Part No.	Tool HRS No.
GT10-2022SCF	760-0003-0	AP105-GT10-2022S	901-5016-8
GT10-2022PCF	760-0006-8	AP105-GT10-2022P	901-5049-7
GT10-2428SCF	765-0009-6	AP105-GT10-2428S	901-5063-4