


## SPECIFICATION CONTROL DRAWING

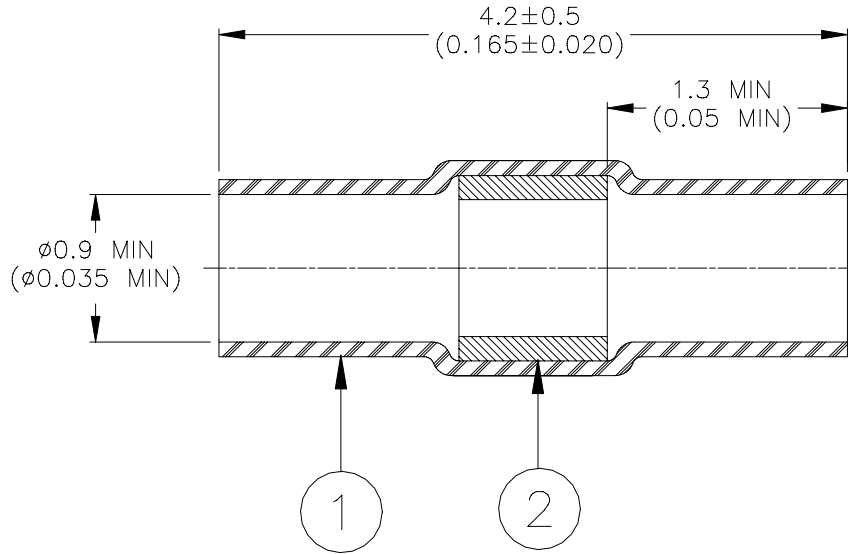

### MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked polyvinylidene fluoride.
2. SOLDER PREFORM WITH FLUX:  
 SOLDER: TYPE Sn96 per ANSI J-STD-006.  
 FLUX: TYPE ROL1 per ANSI-J-STD-004.

### APPLICATION

1. This part is designed to attach two leads having a combined diameter between 0.58 and 0.89 (0.023 and 0.035).
2. Part may be installed using Raychem approved heaters.

@ 2006 Tyco Electronics Corporation. All rights reserved.

<b>tyco</b> <i>Electronics</i>	Tyco Electronics Corporation 300 Constitution Drive, Menlo Park, CA. 94025, U.S.A.	<i>Raychem</i>	TITLE: <b>SOLDERSLEEVE DEVICE</b>		
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]			DOCUMENT NO.: <b>D-210-0213</b>		
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A  ROUGHNESS IN MICRON	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		REV.: <b>A</b>	DATE: <b>7-Nov-06</b>
DRAWN BY: <b>P.TALLY</b>	CAGE CODE: <b>06090</b>	REPLACES: <b>N/A</b>	DCR NUMBER: <b>D060359</b>	SCALE: <b>NTS</b>	SIZE: <b>A</b> SHEET: <b>1 of 1</b>

If this document is printed it becomes uncontrolled. Check for the latest revision.