

# CM-600 Module Series

4-port Fast Ethernet interface modules for the EDS-600 Series



## Features and Benefits

- Modular design with 4-port copper/fiber combinations
- Hot-swappable media modules for continuous operation

## Certifications



## Introduction

The CM-600 Module Series has been designed for use with the EDS-600 Series. The CM-600 Series has a compact modular design with one slot that accommodates 4 ports, which support multiple media types including TX, MSC, SSC, and MST. The modular design ensures that the EDS-600 Series can meet multiple application requirements.

## Specifications

### Ethernet Interface

10/100BaseT(X) Ports (RJ45 connector)	CM-600-4TX: 4 CM-600-1TX Series: 1 CM-600-2TX Series: 2  All models support: Auto negotiation speed Full/Half duplex mode Auto MDI/MDI-X connection
100BaseFX Ports (multi-mode SC connector)	CM-600-4MSC: 4 CM-600-3MSC/1TX: 3 CM-600-2MSC/2TX: 2
100BaseFX Ports (multi-mode ST connector)	CM-600-4MST: 4

100BaseFX Ports (single-mode SC connector)	CM-600-4SSC: 4 CM-600-3SSC/1TX: 3 CM-600-2SSC/2TX: 2			
Optical Fiber	100BaseFX			
	Multi-Mode		Single-Mode	
	Fiber Cable Type	OM1	50/125 μm	G.652
			800 MHz x km	
	Typical Distance		4 km	5 km
	Wavelength	Typical (nm)	1300	
		TX Range (nm)	1260 to 1360	
		RX Range (nm)	1100 to 1600	
	Optical Power	TX Range (dBm)	-10 to -20	
		RX Range (dBm)	-3 to -32	
		Link Budget (dB)	12	
		Dispersion Penalty (dB)	3	
<p>Note: When connecting a single-mode fiber transceiver, we recommend using an attenuator to prevent damage caused by excessive optical power.</p> <p>Note: Compute the “typical distance” of a specific fiber transceiver as follows: Link budget (dB) &gt; dispersion penalty (dB) + total link loss (dB).</p>				

#### Power Parameters

Power Consumption	CM-600-4TX: 0.61 W (max.) CM-600-2TX models: 1.56 W (max.) CM-600-1TX models: 2 W (max.) CM-600-4MSC/4MST/4SSC: 2.44 W (max.)
-------------------	--

#### Physical Characteristics

IP Rating	IP30
Dimensions	29.7 x 144.4 x 144.8 mm (1.17 x 5.69 x 5.7 in)
Weight	CM-600-4TX: 190 g (0.42 lb) CM-600/1TX, CM-600/2TX models: 230 g (0.51 lb) CM-600-4MSC/4MST/4SSC: 240 g (0.53 lb)

#### Environmental Limits

Operating Temperature	-40 to 75°C (-40 to 167°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)

#### MTBF

Time	740,661 hrs
Standards	Telcordia (Bellcore), GB

#### Warranty


Warranty Period	5 years
Details	See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a>

## Package Contents

Device	1 x CM-600 Series module
Documentation	1 x warranty card

## Dimensions

Unit: mm (inch)

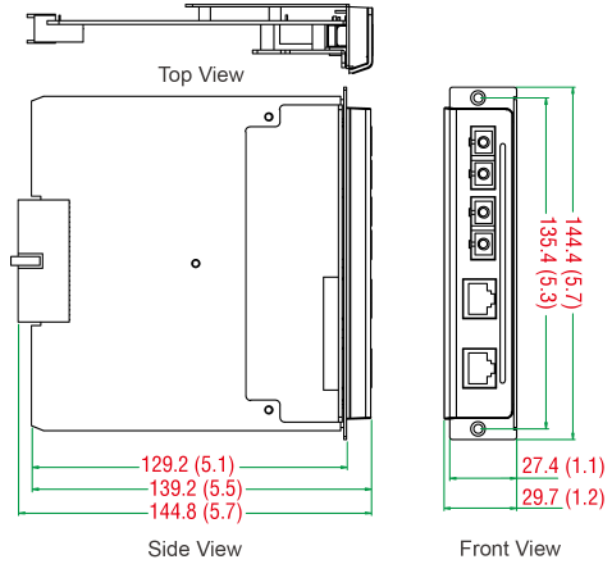

## Ordering Information

Model Name	10/100BaseT(X) Ports (RJ45 Connector)	100BaseFX Ports Multi-mode (SC Connector)	100BaseFX Ports Multi-mode (ST Connector)	100BaseFX Ports Single-mode (SC Connector)	Operating Temp.
CM-600-4TX	4	-	-	-	-40 to 75°C
CM-600-4MSC	-	4	-	-	-40 to 75°C
CM-600-4MST	-	-	4	-	-40 to 75°C
CM-600-4SSC	-	-	-	4	-40 to 75°C
CM-600-3MSC/1TX	1	3	-	-	-40 to 75°C
CM-600-3SSC/1TX	1	-	-	3	-40 to 75°C
CM-600-2MSC/2TX	2	2	-	-	-40 to 75°C
CM-600-2SSC/2TX	2	-	-	2	-40 to 75°C

© Moxa Inc. All rights reserved. Updated Jun 23, 2021.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.