

EC axial fans - HyBlade®

Sickled blades (S series) with full square nozzle, Ø 800



Highlights:

- 5-blade fan, 3-phase fan motor
- 10 VDC max. output / 10 mA, 20 VDC max. output / 50 mA, 0-10 V slave output
- 0-10 VDC / PWM control input, 0-10 V or 4-20 mA sensor input
- Integrated PID controller, RS485 MODBUS, over-temp. protected electronics / motor, alarm relay
- Locked-rotor protection, soft start, PFC passive, line undervoltage / phase failure detection
- Digital inputs for day / night switch, enabling, cooling/heating

Material: Grill guard: Steel and coated in black plastic
 Wall ring: Sheet steel, pre-galvanised and black powder paint
 Blades: Insertion part made of sheet aluminium, extrusion - coated in PP plastics
 Rotor: Coated in black
 Electronics enclosure: Die-cast aluminum, coated in black

Mounting position: Shaft horizontal or rotor on bottom; rotor on top on request


Condensate discharge holes: Rotor-side

Direction of rotation: Clockwise, seen on rotor

Nominal Data		Air flow	Nominal voltage range	Frequency	Power input (1)	Speed (1)	Current draw (1)	Temperature range (1)	Mass	Ingress protection rating	Electrical wiring diagram	UL
Type	Motor	CFM	VAC	Hz	Watts	RPM	A	°C	lbs			
W3G800-GT22-11F	M3G150-GF	14,200	200...240	50/60	1,880	925	5.0	-25...60	94	IP54	A	Yes
W3G800-GT21-01F	M3G150-GF	14,200	380...480	50/60	1,850	925	2.5	-25...65	94	IP54	A	Yes

(1) Nominal data at maximum load.

Curves

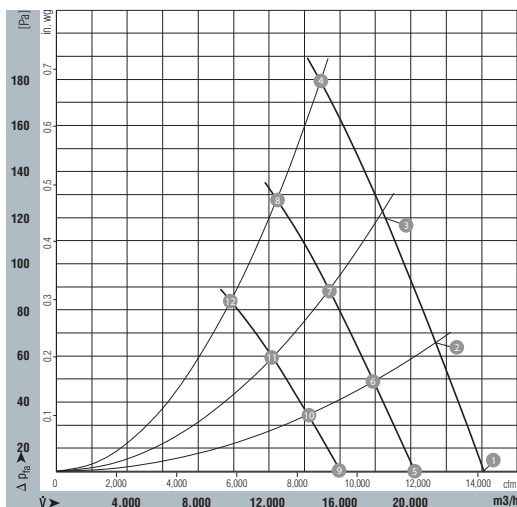

Air performance measured as per: ISO 5801, Installation category A, in ebm-papst full nozzle and without protection against accidental contact.

Suction-side noise levels: L_{WA} as per ISO 13347, L_{pA} measured at 1m distance to fan axis.

The acoustic values given are valid under the measuring conditions mentioned and may vary according to the actual installation situation.

With any deviation to the standard set-up, the specific values have to be checked and reviewed once installed or fitted.

For detailed information on the measuring set-up, please contact ebm-papst.

	n rpm	Pe W	I A (460V)	I A (230V)	L _{WA} dB(A)
1	925	1221	1.6	3.2	72
2	925	1458	1.9	3.7	73
3	925	1612	2.1	4.2	74
4	925	1850	2.5	5.0	80
5	770	669	0.9	1.8	68
6	770	821	1.1	2.2	68
7	770	909	1.2	2.4	70
8	770	1058	1.4	2.8	75
9	610	355	0.5	1.0	62
10	610	426	0.6	1.2	63
11	610	466	0.7	1.4	64
12	610	541	0.7	1.4	69

