
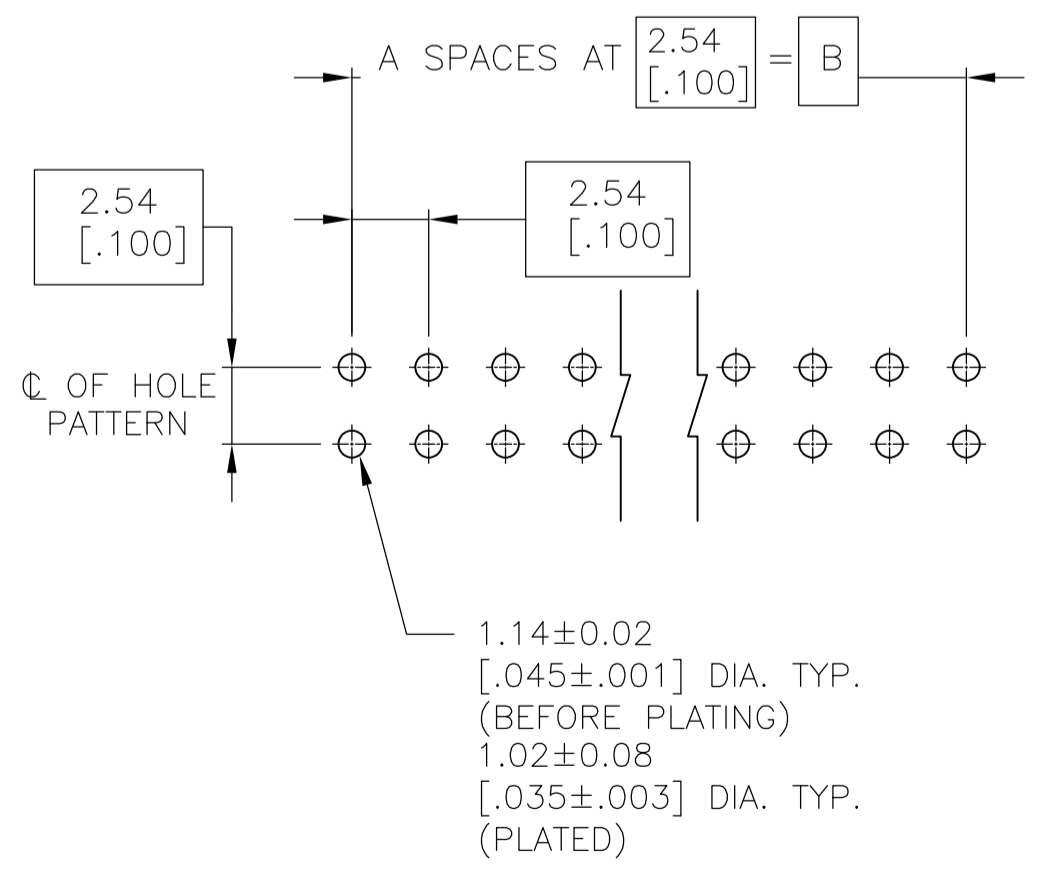


- 1 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 2 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- 3 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- 4 PLATING: 0.00762 [.000030] GOLD ON CONTACT AREA, .00254-0.00508 [.000100-.000200] MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER 0.00127 [.000050] NICKEL.
- 5 PLATING: 0.00762 [.000030] GOLD ON CONTACT AREA, .00254-0.00508 [.000100-.000200] MATTE TIN ON SOLDER TAIL, ALL OVER 0.00127 [.000050] NICKEL.
- 6 HIGH TEMPERATURE CONFIGURATION

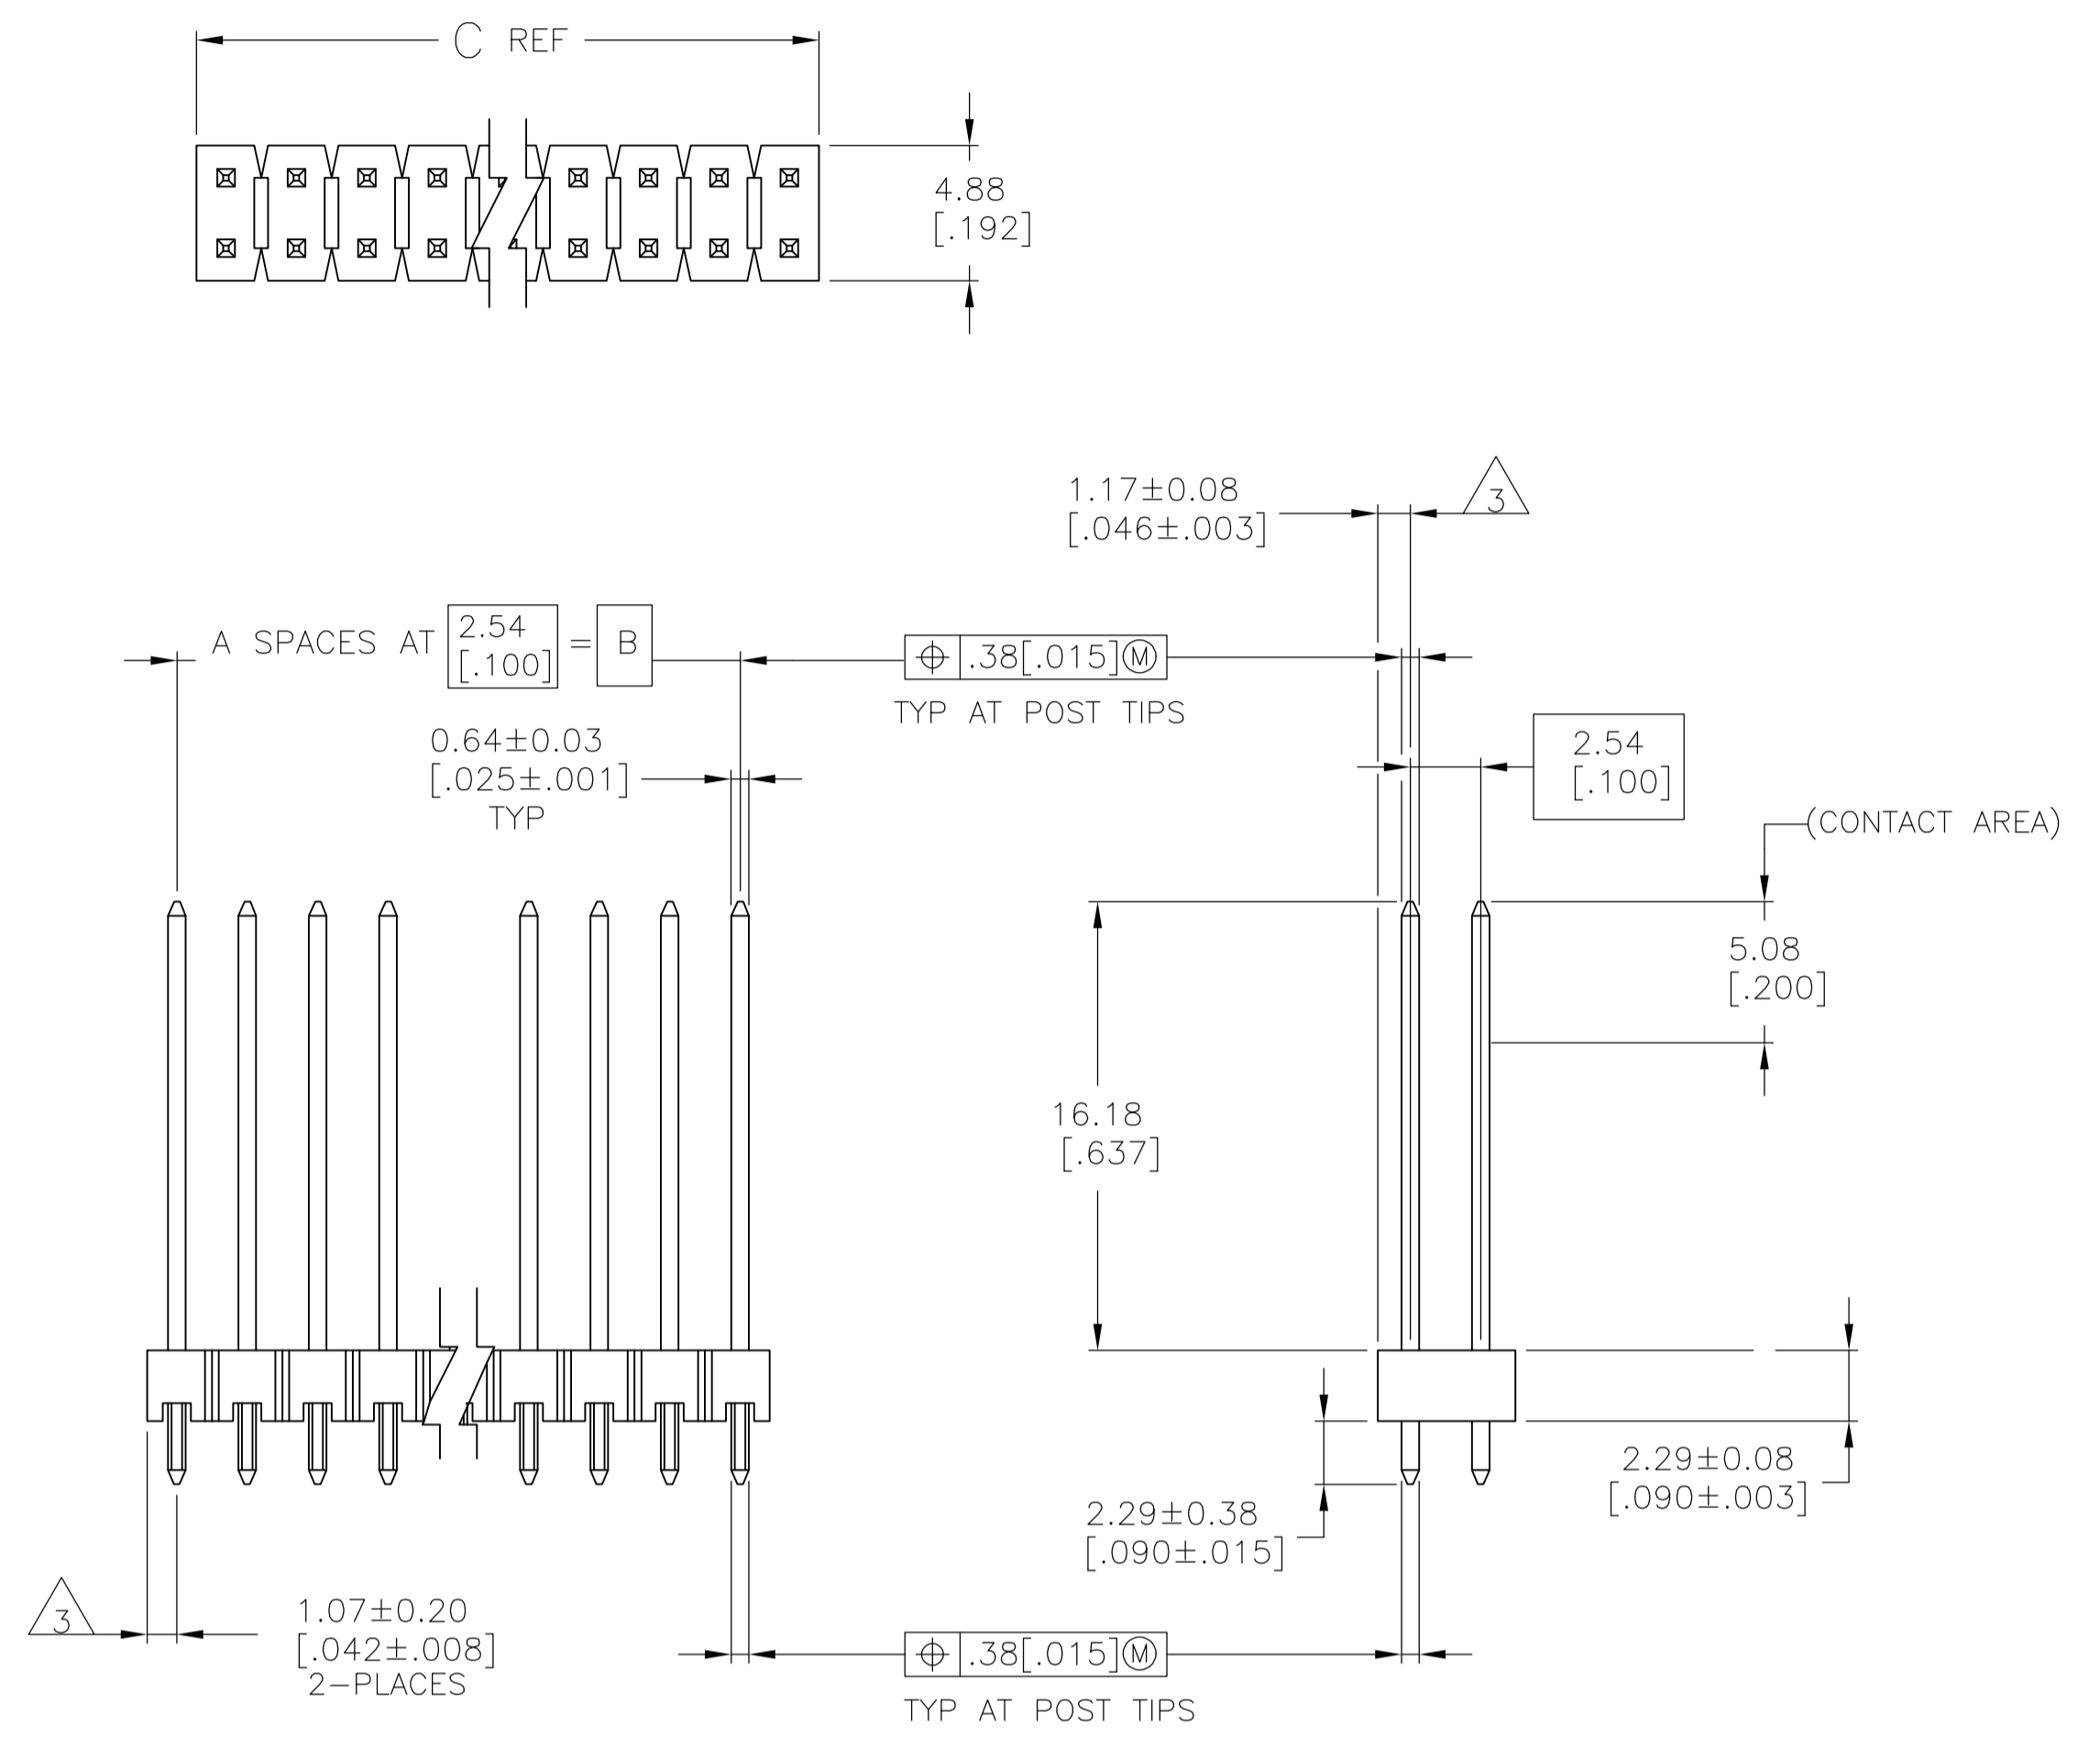

RECOMMENDED HOLE LAYOUT

6	5	101.19 [3.984]	99.06 [3.900]	39	80	5-146433-1
	4	101.19 [3.984]	99.06 [3.900]	39	80	146433-1
REMARKS	PLATING	C	B	A	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN T. HOFFMAN 07-09-95		TE Connectivity	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD G. DUBNICZKI 02-10-95	
0 PLC ± -		1 PLC ± -		NAME	
1 PLC ± -		2 PLC ± 0.51[.02]		PRODUCT SPEC	
2 PLC ± 0.12[.005]		3 PLC ± 0.12[.005]		APPLICATION SPEC	
3 PLC ± 0.012[.0005]		4 PLC ± 0.012[.0005]		SIZE	
ANGLES ± -		FINISH		CAGE CODE	
MATERIAL POST: COPPER ALLOY		FINISH SEE TABLE		DRAWING NO. A1 00779	
WEIGHT		RESTRICTED TO		DRAWING NO. 146433	
CUSTOMER DRAWING		SCALE 4:1		SHEET 1 OF 1	