




IP67 WATERPROOF  
SUNLIGHT READABLE

## 12.1" MONITOR



- ▶ IP67 Waterproof and Dust Proof Casing
- ▶ Projected Capacitive Touchscreen option – USB
- ▶ High Resolution Wide Viewing Angle IPS Display
- ▶ Waterproof Speakers
- ▶ VGA, HDMI, DVI, AV Inputs and Optional SDI Input
- ▶ HDMI output and Optional SDI output
- ▶ 16x9 Aspect Ratio
- ▶ LED Backlight, Ambient Light Sensor
- ▶ High Performance Image and Video Signal Processor
- ▶ Vertical image flip
- ▶ Front buttons disabling capability
- ▶ Chip Monolithic Ceramic Capacitors for improved durability
- ▶ AV2 Auto Switching upon signal detection
- ▶ VESA 75mm Standard
- ▶ 26 Pin heavy-duty connector with connector locking
- ▶ Brightness – 1000 cd/m<sup>2</sup> Sunlight Readable
- ▶ Optical Bonding, Anti-Reflective and Anti-Fingerprint Coating

Physical Resolution: 1280x 800  
 Supported Resolution: 640 x 480 - 1920 x 1200  
 Brightness: 1000 cd/m<sup>2</sup>  
 Contrast Ratio: 1000 : 1  
 Viewing Angle: 178° Horizontal, 178° Vertical  
 Response Time (Tr+Tf): 25 ms (Typ.)  
 Operating Voltage: DC 9V ~ 36V  
 Power Consumption: < 30W  
 Operating Temp: -22°F ~ 185°F (-30°C ~ 85°C)  
 Storage Temp: -22°F ~ 185°F (-30°C ~ 85°C)  
 Weight: 6.25lbs  
 24 Month Warranty  
 All measurements are in [mm]

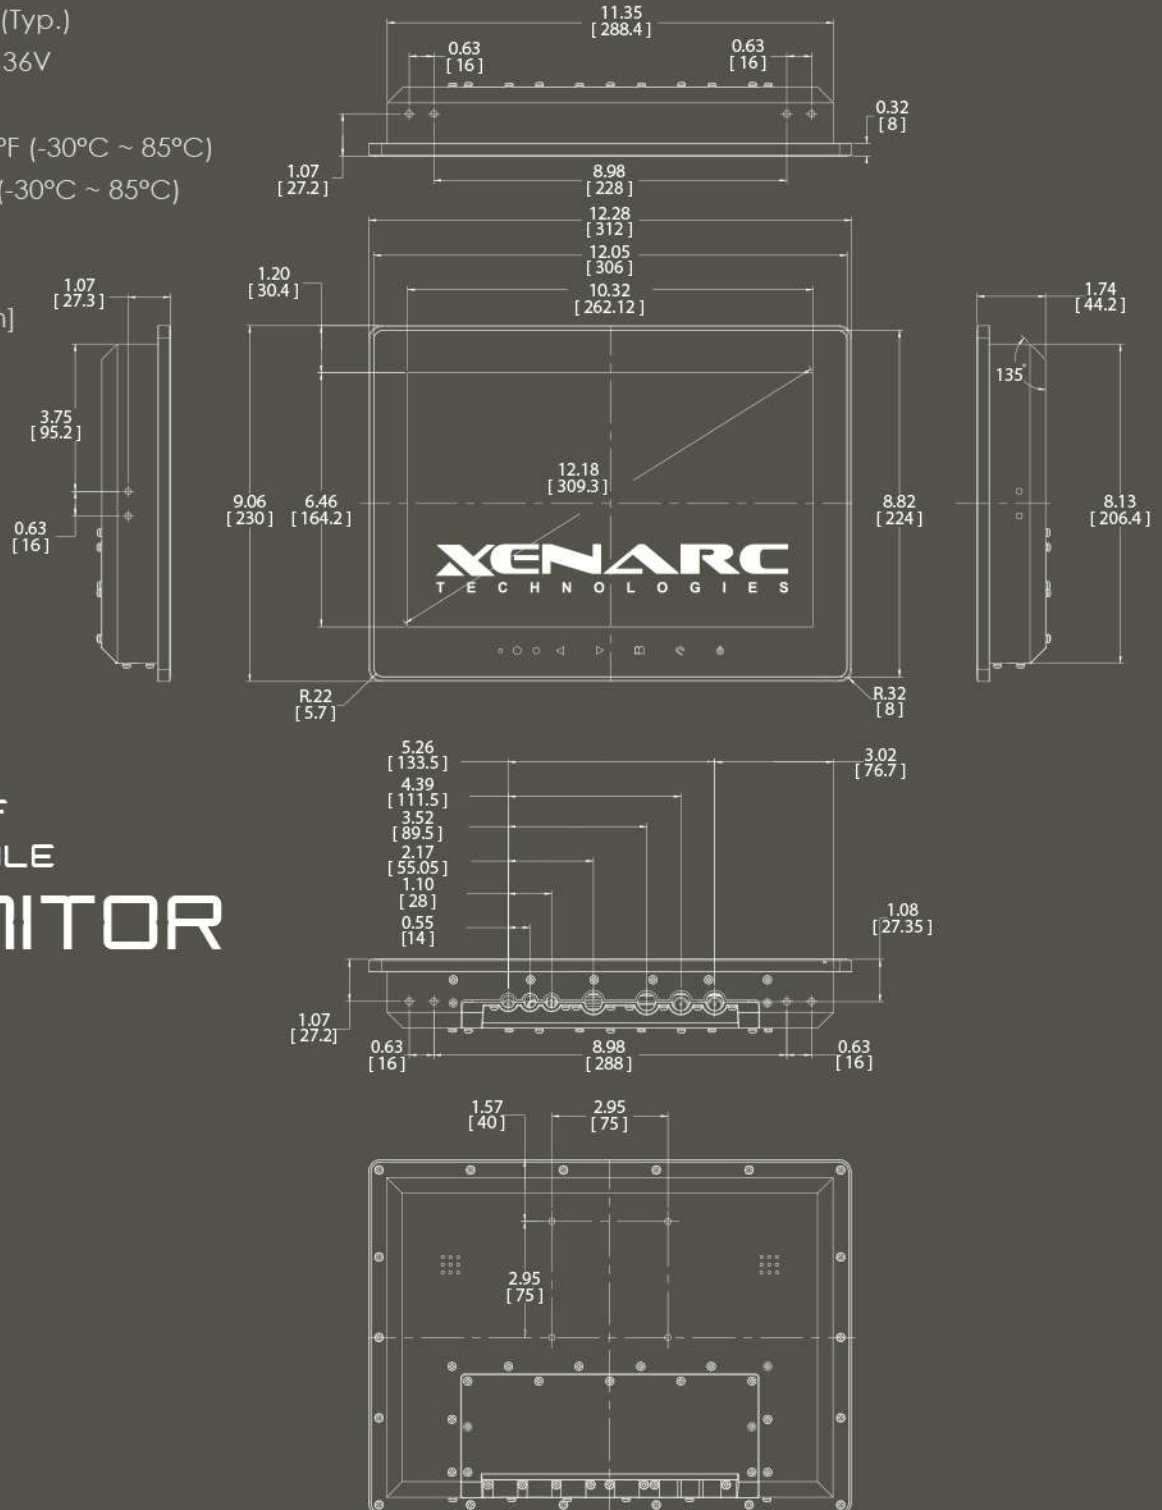

IP67 WATERPROOF  
 SUNLIGHT READABLE  
**12.1" MONITOR**

CERTIFICATIONS



**RoHS**



TEL: 949.380.8898 FAX: 949.380.0888  
 EMAIL: SALES@XENARC.COM