

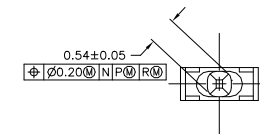
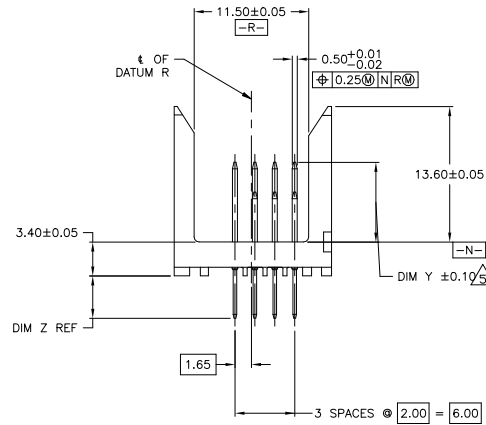
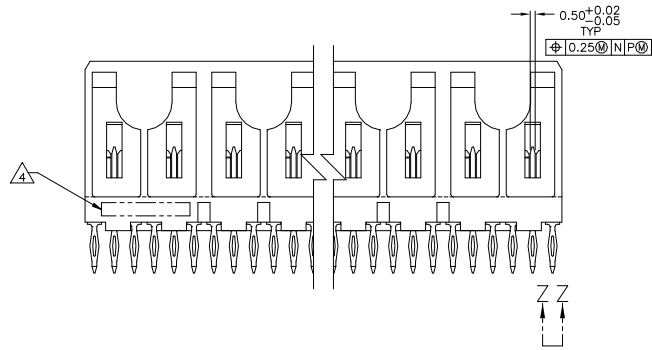


REVISIONS				
P	LN	DESCRIPTION	DATE	BY / APP
C		REVISED PER ECO-20-013368	25SEP2020	RZ / HL

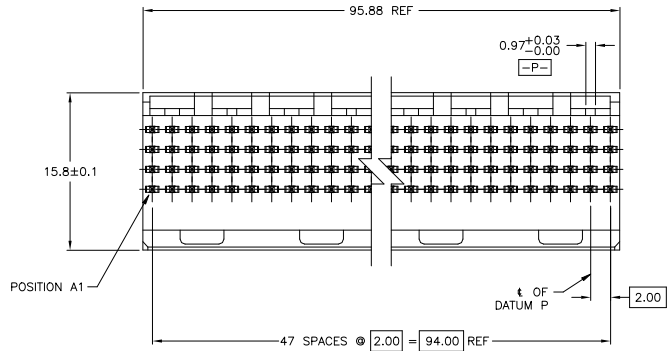

VIEW Z-Z
SCALE 20:1

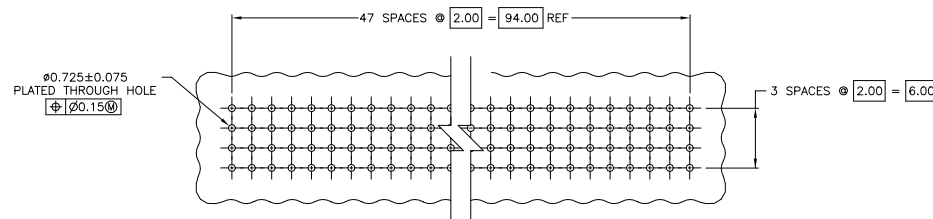

RECOMMENDED CIRCUIT PATTERN
PER IPC-D300 TYPE II, CLASS C
(COMPONENT SIDE)

- 1 HOUSING MATERIAL: LIQUID CRYSTAL POLYMER.
COLOR: NATURAL.
- 2 CONTACT MATERIAL: PHOSPHOR BRONZE.
- 3 CONTACT FINISH:(B)
UNDERPLATE (ENTIRE CONTACT):
0.00127 MIN NICKEL PER SAE-AMS-QQ-N-290
ON MATING SURFACES:
CONFORMS TO ALL TESTING SPECIFIED FOR TELCORDIA
UNCONTROLLED ENVIRONMENT.
ON LEADS:
0.0006 MIN MATTE TIN PER ASTM B 545 OVER UNDERPLATE.
LUBRICATION (MIN MATING SURFACES):
SURFACE CONDITIONER AFTER PLATING.
- 4 PART MARKING, LOCATED APPROXIMATELY AS SHOWN.
- 5 DIMENSION APPLIES WHEN SEATED ON PRINTED CIRCUIT BOARD.

THIS DRAWING IS A CONTROLLED DOCUMENT.		BY: B.MCMMASTER	15SEP04		TE Connectivity
DRAWN: R.WERTZ		15SEP04			
DIMENSIONS: mm		DESIGNED: R.WERTZ	15SEP04	NAME: PIN ASSY SIGNAL MODULE Z-PACK 2mm FB	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC: 108-1441		4R 192P PRESS FIT LEADS	
Ø F.C. ±		APPLICATION SPEC: 114-1075		WITH SEQUENCING	
H.C. ±		SIZE: A1	00779	ONE CODE: C-5223617	RESTRICTED TO: -
MATERIAL: -		WEIGHT: -		CUSTOMER DRAWING	SCALE: 4:1
ANGLES: -				SHEET: 1 OF 2	REV: C

