


NOTES:

- 1) MATERIAL: SEE TABLE
- 2) FINISHES: SEE TABLE
- 3) WRAP LABEL IS MARKED WITH P/N, DATE CODE VOLTAGE & AMPERAGE
- 4) MATES WITH: QUICK CHANGE 4 POLE RECEPTACLE
- 5) ELECTRICAL DATA:
 10AWG UL TYPE: TC-ER STRANDED CABLE
 MAX VOLTAGE: 600V
 MAX CURRENT: 32A
 PROTECTION IP67 (WHEN MATED)
 TEMPERATURE RANGE: -20°C TO 90°C
- 6) PACKAGING:
 CABLE ASSEMBLIES ARE BAGGED SEPERATLY IN POLY BAGS WITH BAR CODE LABEL ATTACHED TO OUTSIDE OF BAG.
- 7) ASSEMBLY IS RoHS COMPLIANT

PART NUMBER LEGEND

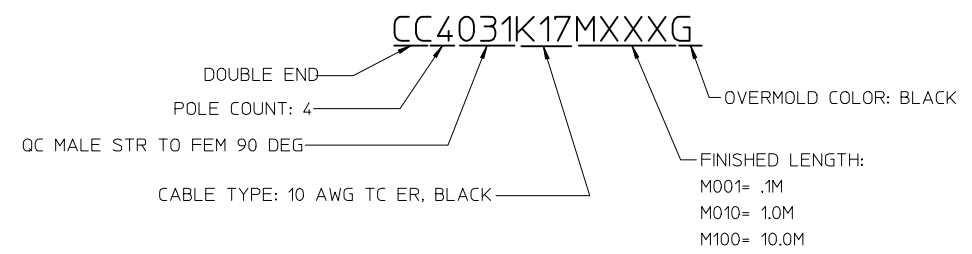

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
11	2	WARNING LABEL	VINYL	ORANGE/BLACK
10	1	WRAP LABEL	VINYL	BLACK/YELLOW
9	1	OVERMOLD, STRAIGHT	PVC	BLACK
8	1	COUPLING, MALE	ALUMINUM	CLEAR ANODIZE
7	4	CONTACT PIN	Cu ALLOY	GOLD PLATED
6	1	INSERT, MALE	PVC	BLACK
5	1	OVERMOLD, 90 DEG.	PVC	BLACK
4	1	COUPLING, FEMALE	ALUMINUM	CLEAR ANODIZE
3	4	CONTACT SOCKET	Cu ALLOY	GOLD PLATED
2	1	INSERT, FEMALE	PVC	BLACK
1	1	CABLE, 10/4 TC-ER (SEE NOTE 5)	TPE JACKET	BLACK

RELEASED EC NO: IPG2016-0989 DRAWN BY: DRWINRSTONE 2016/02/01 CHKD: BWOODMAN 2016/03/25 APPR: BWOODMAN 2016/03/25	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) <table border="1"> <thead> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> </thead> <tbody> <tr> <td>4 PLACES</td> <td>± .005</td> <td>± .0004</td> </tr> <tr> <td>3 PLACES</td> <td>± .005</td> <td>± .0004</td> </tr> <tr> <td>2 PLACES</td> <td>± .010</td> <td>± .0004</td> </tr> <tr> <td>1 PLACE</td> <td>± 0.3</td> <td>± .0118</td> </tr> <tr> <td>0 PLACE</td> <td>± .005</td> <td>± .0004</td> </tr> </tbody> </table>		mm	INCH	4 PLACES	± .005	± .0004	3 PLACES	± .005	± .0004	2 PLACES	± .010	± .0004	1 PLACE	± 0.3	± .0118	0 PLACE	± .005	± .0004	DIMENSION STYLE IN/MM DRAWN BY: RSTONE DATE: 2016/02/01 CHECKED BY: DATE:	SCALE 1:1 DESIGN UNITS INCH	THIRD ANGLE PROJECTION
		mm	INCH																				
4 PLACES	± .005	± .0004																					
3 PLACES	± .005	± .0004																					
2 PLACES	± .010	± .0004																					
1 PLACE	± 0.3	± .0118																					
0 PLACE	± .005	± .0004																					
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		ANGULAR ± 1°	APPROVED BY: BWOODMAN DATE: 2016/03/25 MATERIAL NO.	TITLE QUICK CHANGE CORD ASSY MALE STR TO FEM 90D, BLK 10/4 TPE CABLE molex DOCUMENT NO. SD-130064-012 SHEET NO. 1 OF 1																			