





## LightMOS Power Transistor

- New high voltage technology designed for ZVS-switching in lamp ballasts
- IGBT with integrated reverse diode
- 4A current rating for reverse diode
- Up to 10 times lower gate capacitance than MOSFET
- Avalanche rated
- 150°C operating temperature
- FullPak isolates 2.5 kV AC (1 min.)
- Pb-free lead plating; RoHS compliant
- Qualified according to JEDEC<sup>1</sup> for target applications



Type	V <sub>CE</sub>	I <sub>C</sub>	V <sub>CE(sat)</sub> , T <sub>J</sub> =25°C	T <sub>J,max</sub>	Marking	Package	Ordering Code
ILA03N60	600V	3.0A	2.9V	150°C	L03N60	PG-TO-220-3-31	Q67040-S4626
ILP03N60	600V	3.0A	2.9V	150°C	L03N60	PG-TO-220-3-1	Q67040-S4628
ILD03N60	600V	3.0A	2.9V	150°C	L03N60	PG-TO-252-3-1	Q67040-S4625

### Maximum Ratings

Parameter	Symbol	Value		Unit
		ILA03N60	Others	
Collector-emitter voltage	V <sub>CE</sub>	600		V
DC collector current	I <sub>C</sub>	T <sub>C</sub> = 25°C	3	A
		T <sub>C</sub> = 100°C	2.2	
Pulsed collector current, t <sub>p</sub> limited by T <sub>J,max</sub> , t <sub>p</sub> < 10 ms	I <sub>C,puls</sub>	9		
Pulsed collector current, t <sub>p</sub> limited by T <sub>J,max</sub>		5.5		
Diode forward current	I <sub>F</sub>	T <sub>C</sub> = 25°C	4	4
		T <sub>C</sub> = 100°C	2.2	
Diode pulsed current, t <sub>p</sub> limited by T <sub>J,max</sub> , t <sub>p</sub> < 10 ms	I <sub>F,puls</sub>	9		
Diode pulsed current, t <sub>p</sub> limited by T <sub>J,max</sub>		5.5		
Avalanche energy, single pulse I <sub>C</sub> =0.4A, V <sub>CE</sub> =50V	E <sub>AS</sub>	0.32		mJ
Gate-emitter voltage	V <sub>GE</sub>	±30		V
Reverse diode dv/dt I <sub>C</sub> ≤ 3A, V <sub>CE</sub> ≤ 450V, T <sub>J,max</sub> ≤ 150°C	dv/dt	1 <sup>2</sup>		V/ns
Power dissipation (T <sub>C</sub> = 25°C)	P <sub>tot</sub>	16.5	27	W
Operating junction and storage temperature	T <sub>stg</sub>	-55...+150		°C
Soldering temperature PG-TO-252: reflow soldering MSL3 Others: wavesoldering, 1.6 mm (0.063 in.) from case for 10s	T <sub>s</sub>	260		
		260		

<sup>1</sup> J-STD-020 and JESD-022

<sup>2</sup> Reverse diode of transistor is commutated with same device according to figure C. With application relevant values I<sub>C</sub> ≤ 1.5A, C<sub>Snubber</sub> = 1 nF and R<sub>G</sub> ≥ 50Ω, dv/dt of the reverse diode is within its specification.

### Thermal Resistance

Parameter	Symbol	Conditions	Max. Value	Unit
<b>Characteristic</b>				
IGBT thermal resistance, junction – case	$R_{thJC}$	PG-TO-220-3-31	7.6	K/W
		Other packages	4.7	
Diode thermal resistance, junction – case	$R_{thJCD}$	PG-TO-220-3-31	12	
		Other packages	10	
Therm. resistance, junction – ambient	$R_{thJA}$	PG-TO-220-3-31	65	
		PG-TO-220-3-1	62	
SMD version, device on PCB: @ min. footprint @ 6cm <sup>2</sup> cooling area <sup>1</sup>	$R_{thJA}$	PG-TO-252-3-1	75	
			50	

### Electrical Characteristic, at $T_j = 25\text{ }^\circ\text{C}$ , unless otherwise specified

Parameter	Symbol	Conditions	Value			Unit
			min.	Typ.	max.	
<b>Static Characteristic</b>						
Collector-emitter breakdown voltage	$V_{(BR)CES}$	$V_{GE}=0V, I_C=0.5mA$	600	-	-	V
Collector-emitter avalanche breakdown voltage	$V_{(BR)CE}$	$V_{GS}=0V; I_C=0.4A$	-	850	-	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$V_{GE}=10V, I_C=3.0A$ $T_j=25\text{ }^\circ\text{C}$ $T_j=150\text{ }^\circ\text{C}$	-	2.3	2.9	
			-	2.7		
		$V_{GE}=10V, I_C=0.8A$ $T_j=25\text{ }^\circ\text{C}$ $T_j=150\text{ }^\circ\text{C}$	-	1.5	-	
			-	1.5	-	
Diode forward voltage	$V_F$	$V_{GE}=0V, I_F=3.0A$ $T_j=25\text{ }^\circ\text{C}$ $T_j=150\text{ }^\circ\text{C}$	-	1.5	1.8	
			-	1.6		
		$V_{GE}=0V, I_F=0.8A$ $T_j=25\text{ }^\circ\text{C}$ $T_j=150\text{ }^\circ\text{C}$	-	1.0	-	
			-	1.0	-	
Gate-emitter threshold voltage	$V_{GE(th)}$	$I_C=30\mu A, V_{CE}=V_{GE}$	2.1	3.0	3.9	V

<sup>1</sup> Device on 40mm\*40mm\*1.5mm epoxy PCB FR4 with 6cm<sup>2</sup> (one layer, 70µm thick) copper area for drain connection. PCB is vertical without blown air.

**Electrical Characteristic, at  $T_j = 25^\circ\text{C}$ , unless otherwise specified** continued

Parameter	Symbol	Conditions	Value			Unit
			min.	typ.	max.	
Zero gate voltage collector current	$I_{CES}$	$V_{CE}=600\text{V}, V_{GE}=0\text{V}$ $T_j=25^\circ\text{C}$ $T_j=150^\circ\text{C}$	-	1	20	$\infty\text{A}$
Gate-emitter leakage current	$I_{GES}$	$V_{CE}=0\text{V}, V_{GE}=20\text{V}$	-	-	100	nA
Transconductance	$g_{fs}$	$V_{CE}=20\text{V}, I_C=3.0\text{A}$	-	1.5	-	S

**Capacities, Gate Charge, at  $T_j=25^\circ\text{C}$** 

Parameter	Symbol	Conditions	Value			Unit
			min.	typ.	max.	
Input capacitance	$C_{iss}$	$V_{CE}=25\text{V},$	-	110	-	pF
Output capacitance	$C_{oss}$	$V_{GE}=0\text{V},$	-	6	-	
Reverse transfer capacitance	$C_{rfs}$	$f=1\text{MHz}$	-	4	-	
Effective Output Capacitance (Energy related)	$C_{o(er)}$	$V_{GE}=0\text{V},$ $V_{CE}=0\text{V to }480\text{V}$		3.7		pF
Gate to emitter charge	$Q_{GE}$	$V_{CE}=400\text{V},$ $I_C=3.0\text{A},$ $V_{GE}=10\text{V}$	-	1	-	nC
Gate to collector charge	$Q_{GC}$		-	5.5	-	
Gate total charge	$Q_G$		-	8.5	-	
Gate plateau voltage	$V_m$		-	6.5	-	
Gate to emitter charge	$Q_{GE}$	$V_{CE}=400\text{V},$ $I_C=0.8\text{A},$ $V_{GE}=10\text{V}$	-	0.5	-	nC
Gate to collector charge	$Q_{GC}$		-	4.0	-	
Gate total charge	$Q_G$		-	8	-	
Gate plateau voltage	$V_m$		-	3.5	-	

**Switching Characteristic, Inductive Load, at  $T_j=25^\circ\text{C}$** 

Parameter	Symbol	Conditions	Value			Unit
			min.	typ.	max.	
<b>IGBT Characteristic</b>						
Turn-on delay time	$t_{d(on)}$	$V_{CC}=400\text{V},$ $I_C=0.8\text{A},$ $V_{GE}=0/10\text{V},$ $R_G=60\Omega,$ $C_{S\text{snubber}}=0\text{nF}$ ( $C_{S\text{snubber}}$ : Snubber capacitor)	-	15	-	ns
Rise time	$t_r$		-	35	-	
Turn-off delay time	$t_{d(off)}$		-	100	-	
Fall time	$t_f$		-	100	-	
Turn-on energy	$E_{on}^4$		-	12	-	
Turn-off energy	$E_{off}$	-	20	-		
Turn-off energy	$E_{off}$	$C_{S\text{snubber}}=1\text{nF}$	-	8	-	


<sup>4</sup>  $E_{on}$  includes SDP04S60 diode commutation losses

**Switching Characteristic, Inductive Load, at  $T_j=150\text{ }^\circ\text{C}$**


Parameter	Symbol	Conditions	Value			Unit
			min.	typ.	max.	
<b>IGBT Characteristic</b>						
Turn-on delay time	$t_{d(on)}$	$V_{CC}=400V,$ $I_C=0.8A,$ $V_{GE}=0/10V,$ $R_G=60\Omega,$ $C_{Snubber}=0nF$	-	20	-	ns
Rise time	$t_r$		-	45	-	
Turn-off delay time	$t_{d(off)}$		-	120	-	
Fall time	$t_f$		-	120	-	
Turn-on energy	$E_{on}^3$	(C <sub>Snubber</sub> : Snubber capacitor)	-	15	-	$\mu J$
Turn-off energy	$E_{off}$		-	28	-	
Turn-off energy	$E_{off}$	$C_{Snubber} = 1nF$	-	12	-	

**Switching Characteristic, Inductive Load, at  $T_j=25\text{ }^\circ\text{C}$**


Parameter	Symbol	Conditions	Value			Unit
			min.	typ.	max.	
<b>Reverse diode Characteristic (switching in half bridge configuration with same transistor according to figure C)</b>						
Reverse recovery time	$t_{rr}$	$V_R=400V,$ $I_F=0.8A,$ $V_{GE}=0/10V,$ $R_G=80\Omega$	-	90	-	ns
Reverse recovery charge	$Q_{rr}$		-	0.27	-	$\mu C$
Peak reverse recovery current	$I_{rrm}$		-	5.5	-	A
Peak rate of fall of reverse recovery current	$di_{rr}/dt$		-	300	-	A/ $\mu s$
Reverse recovery time	$t_{rr}$	$V_R=400V,$ $I_F=3A,$ $V_{GE}=0/10V,$ $R_G=80\Omega$	-	250	-	ns
Reverse recovery charge	$Q_{rr}$		-	0.75	-	$\mu C$
Peak reverse recovery current	$I_{rrm}$		-	8	-	A
Peak rate of fall of reverse recovery current	$di_{rr}/dt$		-	300	-	A/ $\mu s$

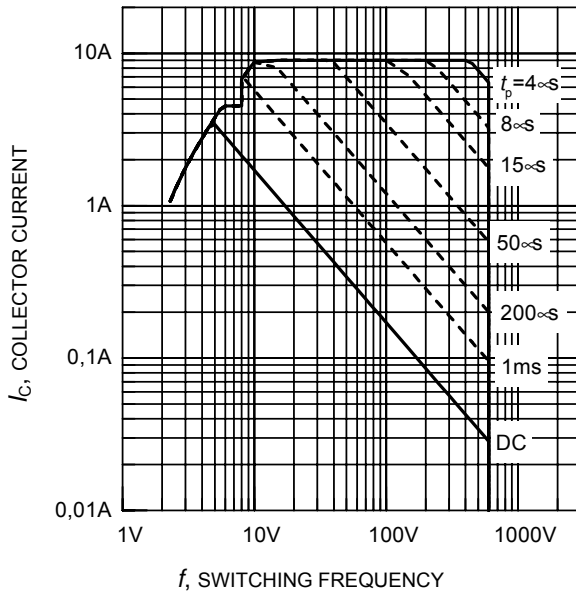


**Figure 1: Safe operating area (FullPak)**  
( $D = 0$ ,  $T_C = 25^\circ\text{C}$ ,  $T_j \leq 150^\circ\text{C}$ )

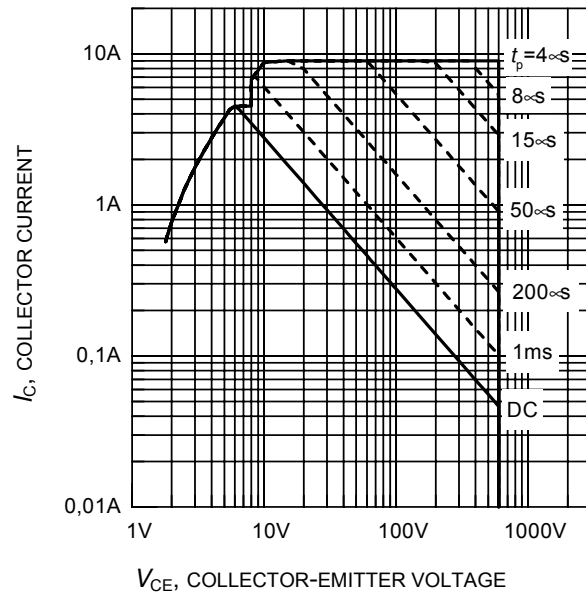


**Figure 2: Safe operating area (Other Packages)**  
( $D = 0$ ,  $T_C = 25^\circ\text{C}$ ,  $T_j \leq 150^\circ\text{C}$ )

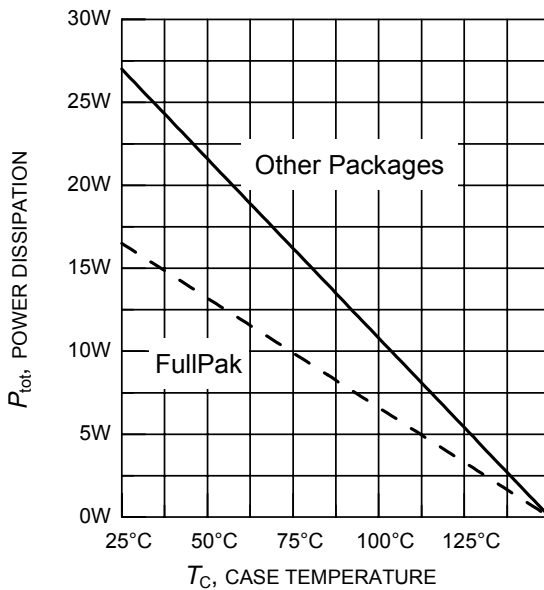


**Figure 3. Power dissipation as a function of case temperature**  
( $T_j \leq 150^\circ\text{C}$ )

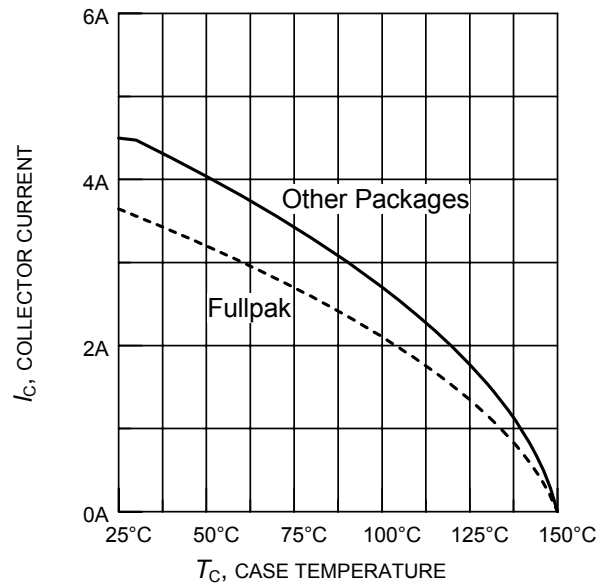


**Figure 4. Collector current as a function of case temperature**  
( $V_{GE} \leq 10\text{V}$ ,  $T_j \leq 150^\circ\text{C}$ )

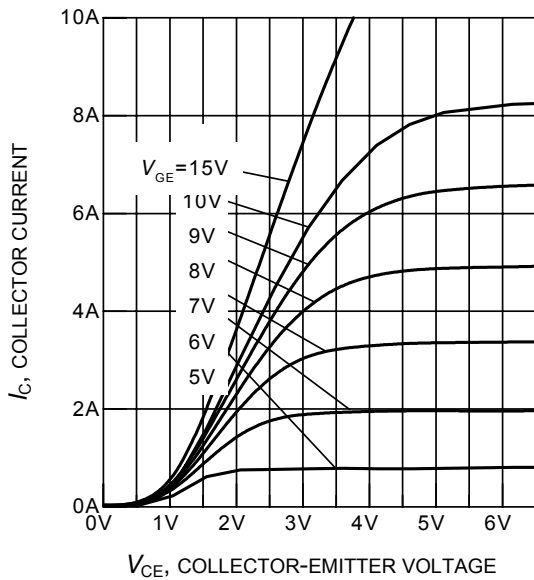


**Figure 5. Typical output characteristics**  
( $T_j = 25^\circ\text{C}$ )

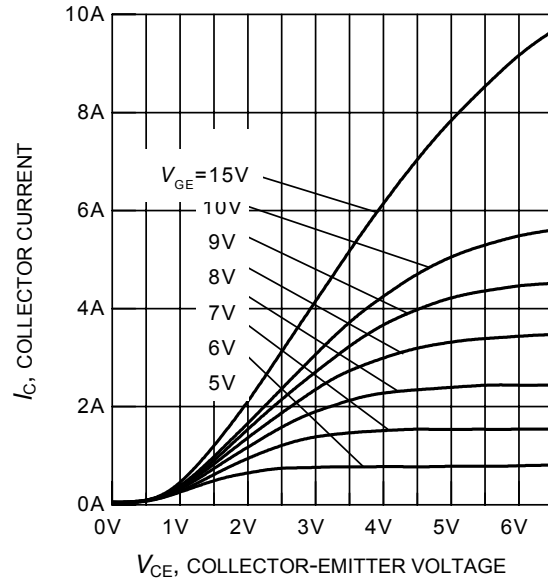


**Figure 6. Typical output characteristics**  
( $T_j = 150^\circ\text{C}$ )

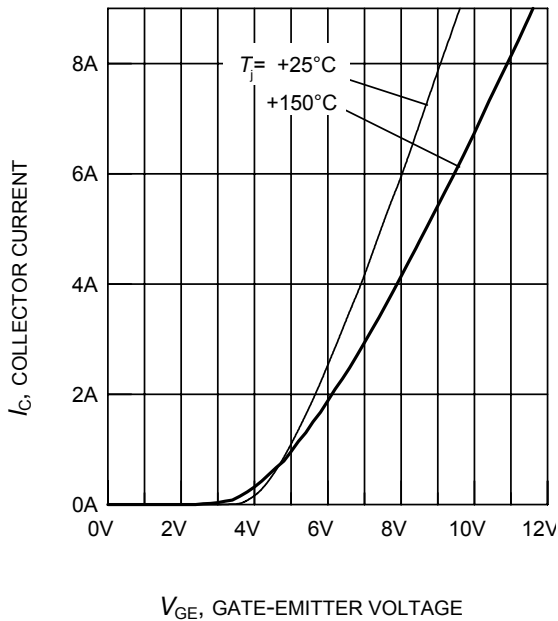


**Figure 7. Typical transfer characteristics**  
( $V_{CE} = 20\text{V}$ )

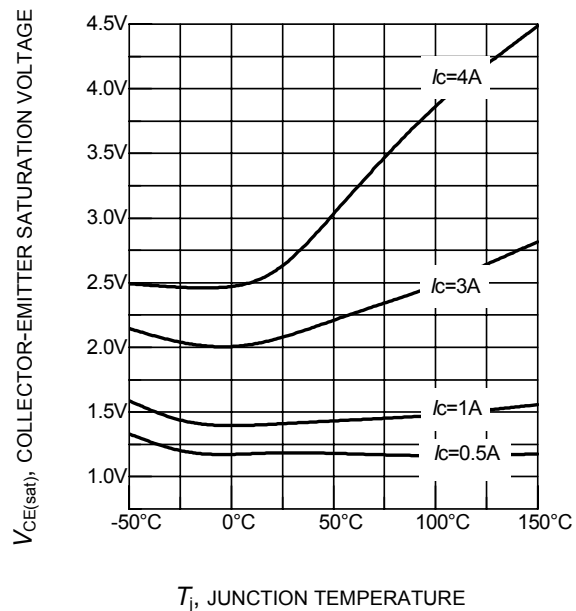


**Figure 8. Typical collector-emitter saturation voltage as a function of junction temperature**  
( $V_{GE} = 10\text{V}$ )

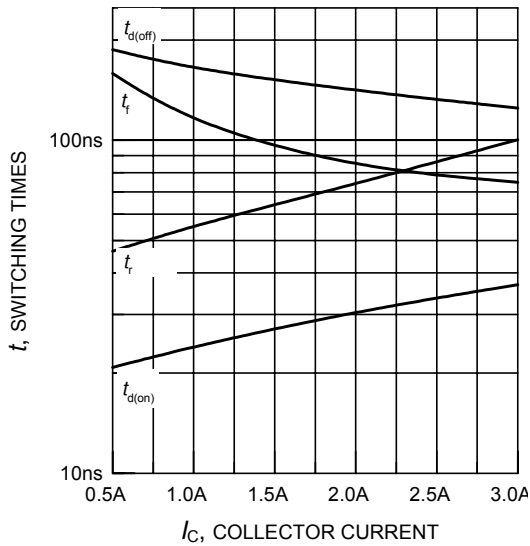


**Figure 9. Typical switching times as a function of collector current**  
(inductive load,  $T_j = 150^\circ\text{C}$ ,  $V_{CE} = 400\text{V}$ ,  $V_{GE} = 0/+10\text{V}$ ,  $R_G = 80\Omega$ , Dynamic test circuit in Figure E)

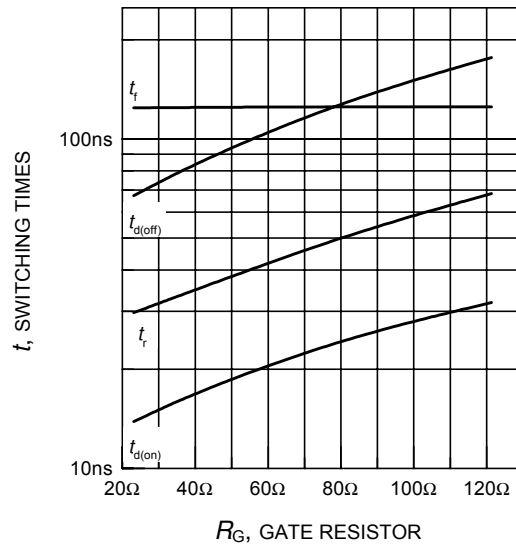


**Figure 10. Typical switching times as a function of gate resistor**  
(inductive load,  $T_j = 150^\circ\text{C}$ ,  $V_{CE} = 400\text{V}$ ,  $V_{GE} = 0/+10\text{V}$ ,  $I_C = 1\text{A}$ , Dynamic test circuit in Figure E)

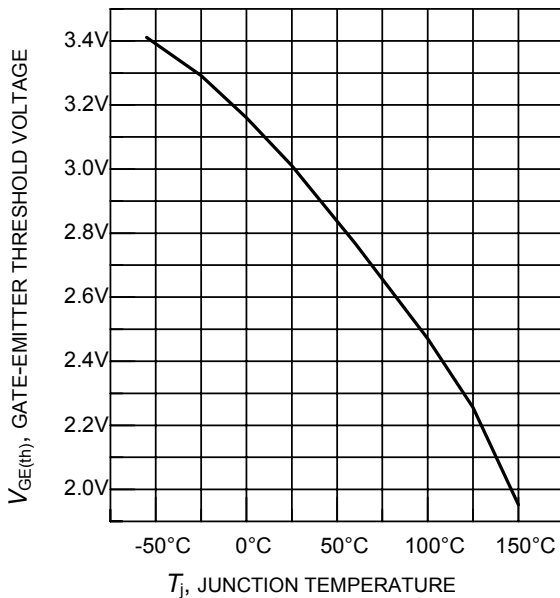


**Figure 12. Gate-emitter threshold voltage as a function of junction temperature**  
( $I_C = 30\mu\text{A}$ )

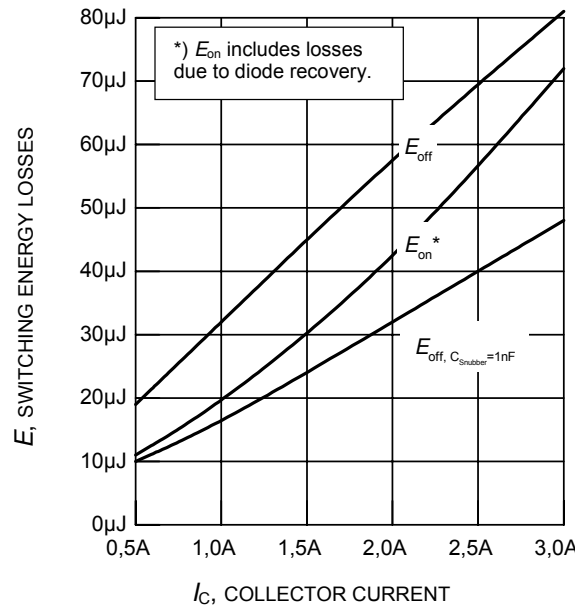


**Figure 13. Typical switching energy losses as a function of collector current**  
(inductive load,  $T_j = 150^\circ\text{C}$ ,  $V_{CE} = 400\text{V}$ ,  $V_{GE} = 0/+10\text{V}$ ,  $R_G = 80\Omega$ ,  $C_{Snubber} = 0/1\text{nF}$ , Dynamic test circuit in Figure E)

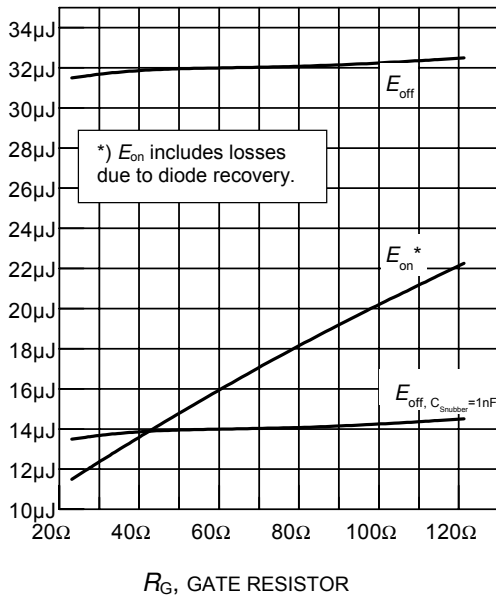


**Figure 14. Typical switching energy losses as a function of gate resistor**  
(inductive load,  $T_j = 150^\circ\text{C}$ ,  $V_{CE} = 400\text{V}$ ,  $V_{GE} = 0/+10\text{V}$ ,  $I_C = 1\text{A}$ ,  $C_{Snubber} = 0/1\text{nF}$   
Dynamic test circuit in Figure E)

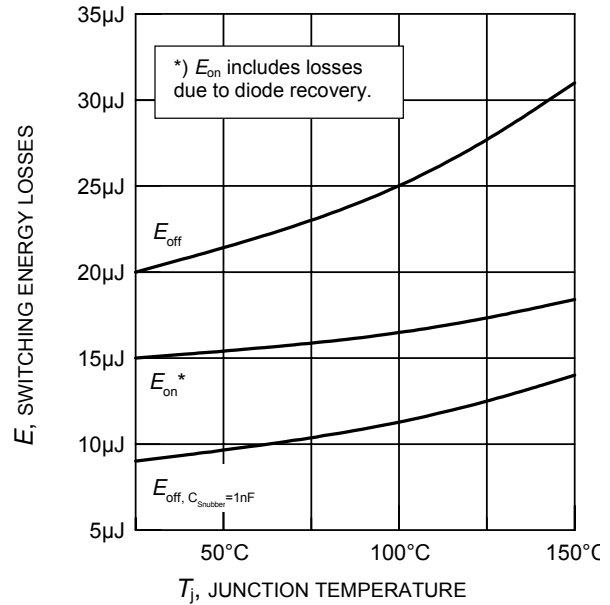

**Figure 15. Typical switching energy losses as a function of junction temperature**  
(inductive load,  $V_{CE} = 400\text{V}$ ,  $V_{GE} = 0/+10\text{V}$ ,  $I_C = 1\text{A}$ ,  $R_G = 80\Omega$ ,  $C_{Snubber} = 0/1\text{nF}$   
Dynamic test circuit in Figure E)

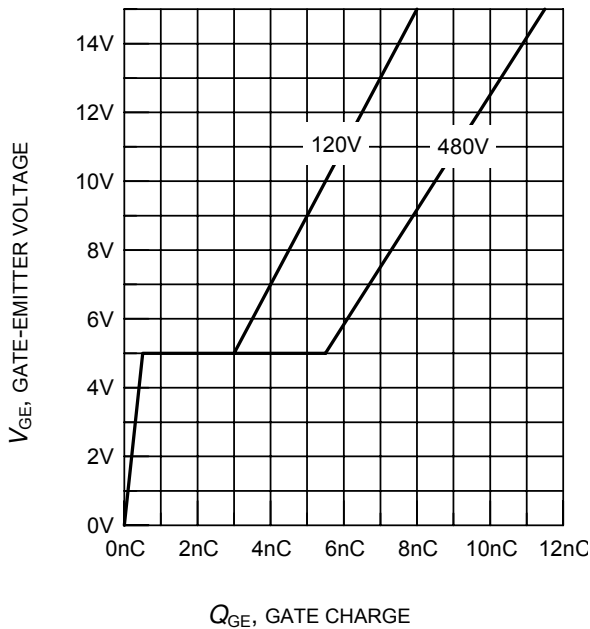


**Figure 16. Typical gate charge**  
( $I_C = 0.8\text{A}$ )

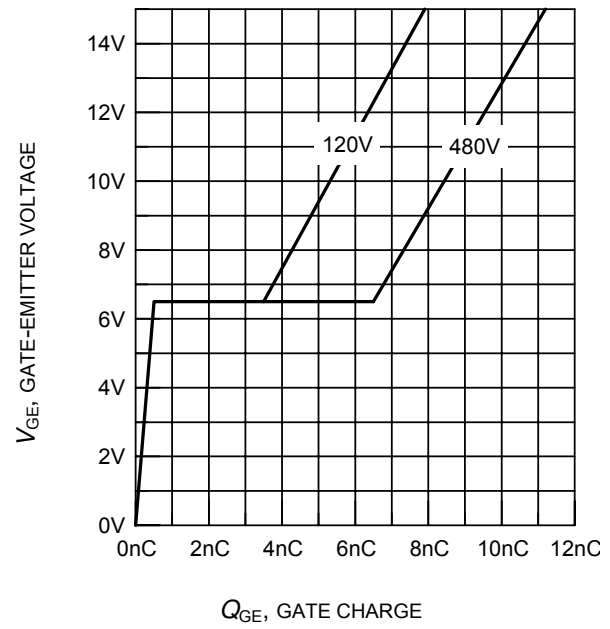


**Figure 17. Typical gate charge**  
( $I_C = 3\text{A}$ )




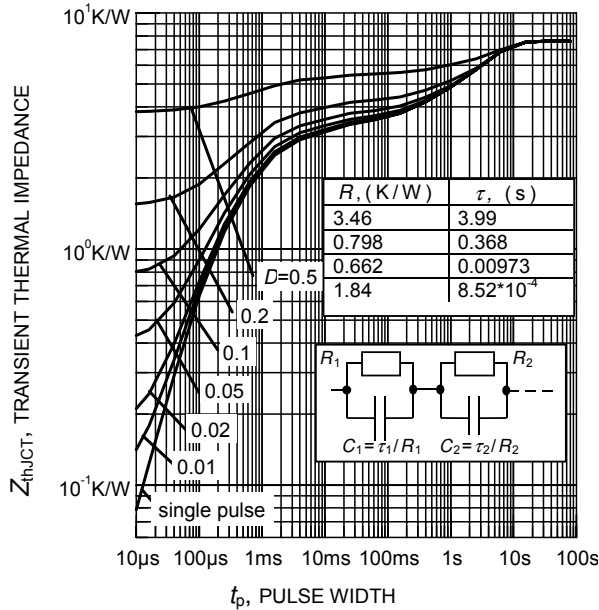


**Figure 18: IGBT transient thermal impedance as a function of pulse width (FullPak)**  
( $D = t_p / T$ )

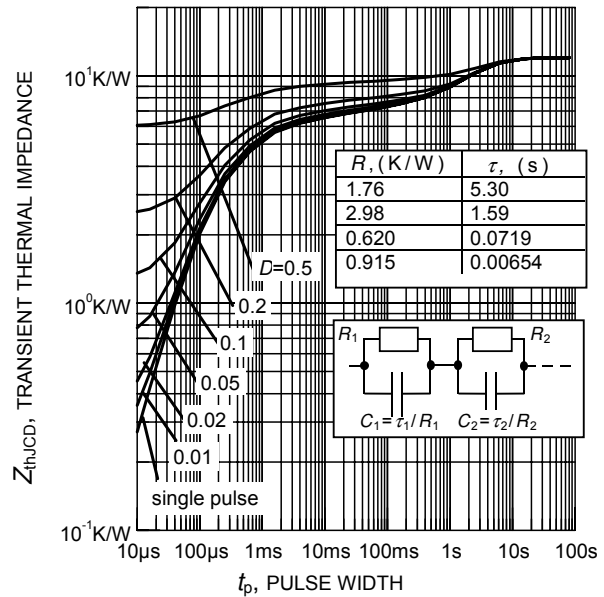


**Figure 19: Diode transient thermal impedance as a function of pulse width (FullPak)**  
( $D = t_p / T$ )

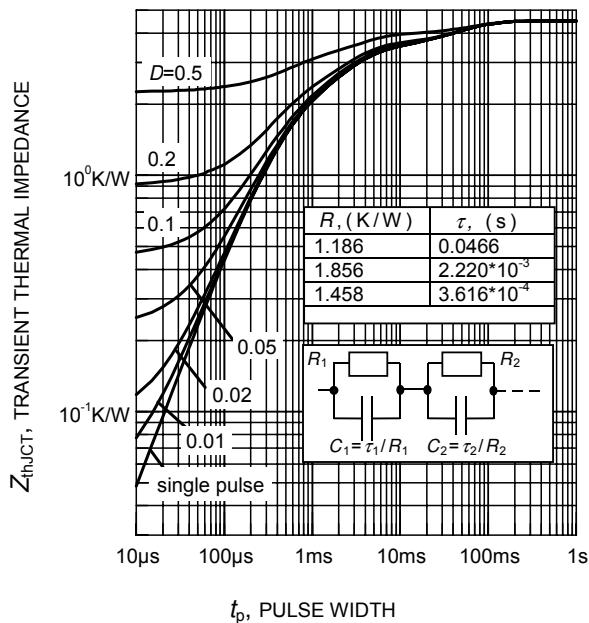


**Figure 20: IGBT transient thermal impedance as a function of pulse width (Other Packages)**  
( $D = t_p / T$ )

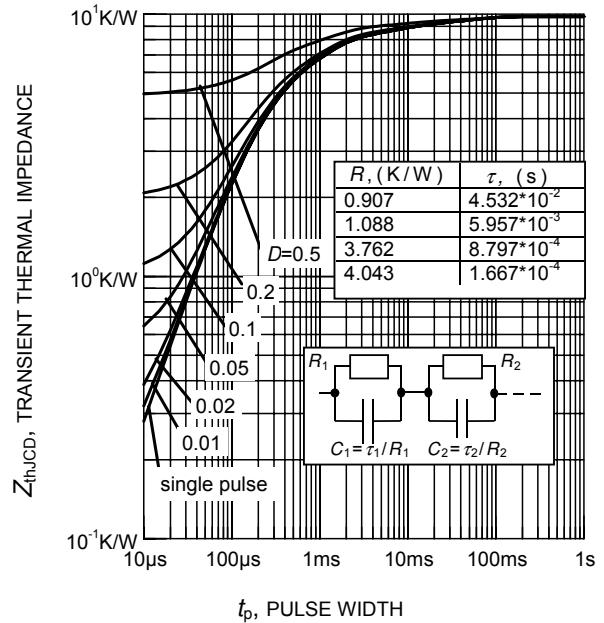


**Figure 21: Diode transient thermal impedance as a function of pulse width (Other Packages)**  
( $D = t_p / T$ )

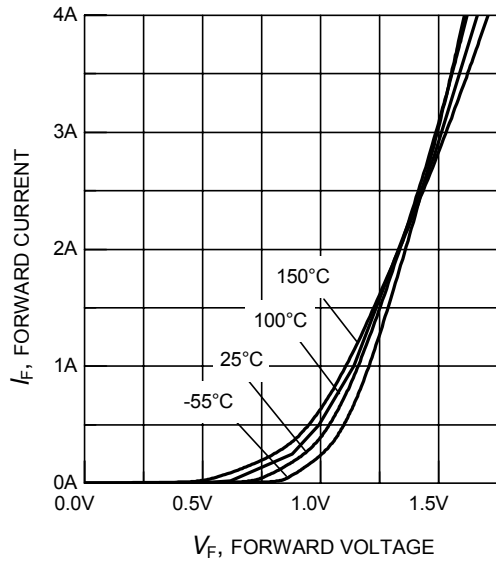

**Figure 20. Typical diode forward current as a function of forward voltage**

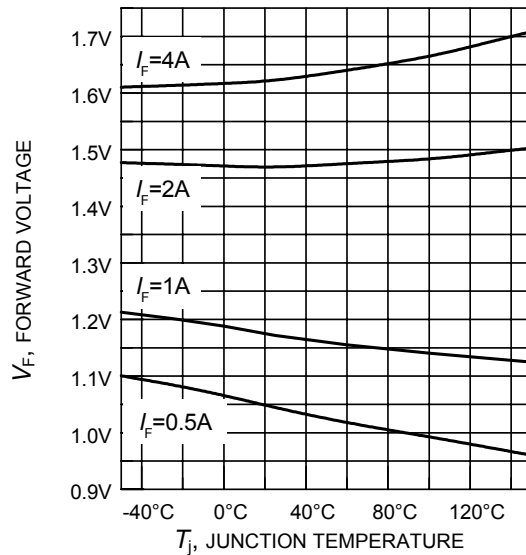

**Figure 21. Typical diode forward voltage as a function of junction temperature**

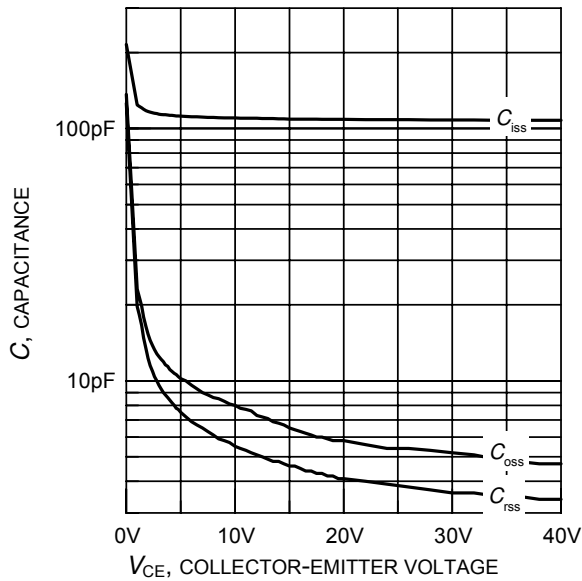

**Figure 19. Typical capacitance as a function of collector-emitter voltage**  
( $V_{GE} = 0V$ ,  $f = 1MHz$ )

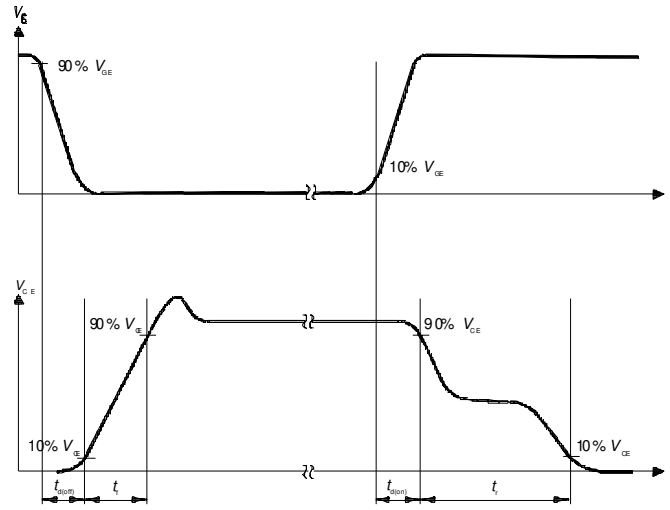


Figure A. Definition of switching times

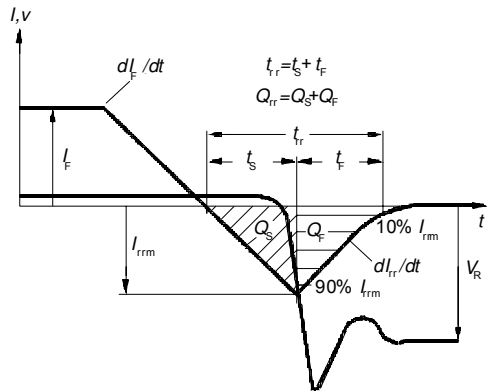


Figure B. Definition of diodes switching characteristics


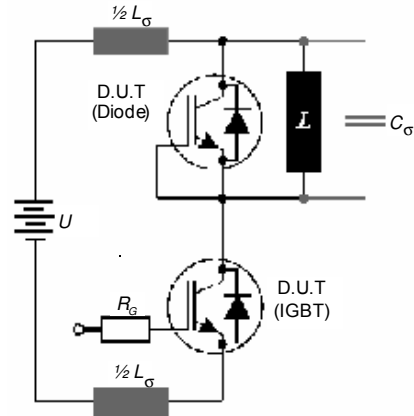


Figure C. Dynamic test circuit


symbol		dimensions			
		[mm]		[inch]	
		min	max	min	max
A	10.37	10.63	0.4084	0.4184	
B	15.86	16.12	0.6245	0.6345	
C	0.65	0.78	0.0256	0.0306	
D	2.95 typ.		0.1160 typ.		
E	3.15	3.25	0.124	0.128	
F	6.05	6.56	0.2384	0.2584	
G	13.47	13.73	0.5304	0.5404	
H	3.18	3.43	0.125	0.135	
K	0.45	0.63	0.0177	0.0247	
L	1.23	1.36	0.0484	0.0534	
M	2.54 typ.		0.100 typ.		
N	4.57	4.83	0.1800	0.1900	
P	2.57	2.83	0.1013	0.1113	
T	2.51	2.62	0.0990	0.1030	

Please refer to mounting instructions (application note AN-TO220-3-31-01)

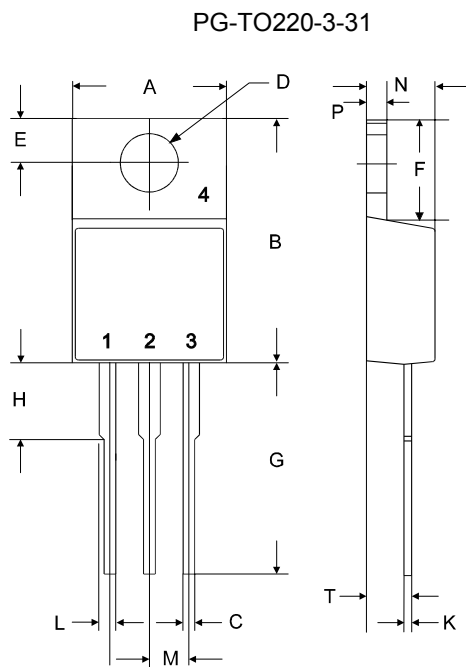

symbol		dimensions			
		[mm]		[inch]	
		min	max	min	max
A	9.70	10.30	0.3819	0.4055	
B	14.88	15.95	0.5858	0.6280	
C	0.65	0.86	0.0256	0.0339	
D	3.55	3.89	0.1398	0.1531	
E	2.60	3.00	0.1024	0.1181	
F	6.00	6.80	0.2362	0.2677	
G	13.00	14.00	0.5118	0.5512	
H	4.35	4.75	0.1713	0.1870	
K	0.38	0.65	0.0150	0.0256	
L	0.95	1.32	0.0374	0.0520	
M	2.54 typ.		0.1 typ.		
N	4.30	4.50	0.1693	0.1772	
P	1.17	1.40	0.0461	0.0551	
T	2.30	2.72	0.0906	0.1071	

PG-TO252-3-1

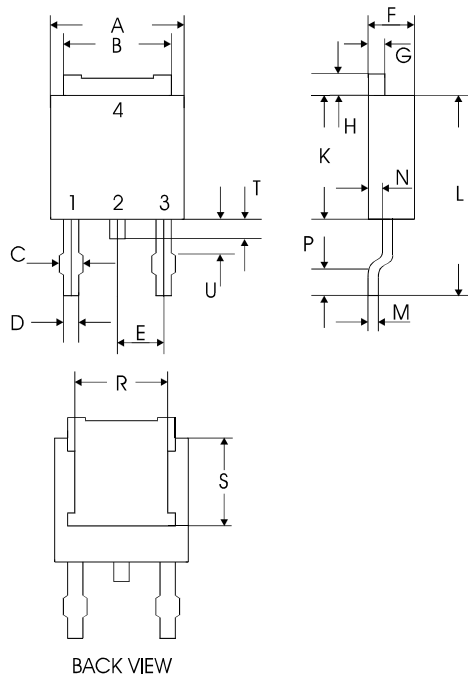

symbol	dimensions			
	[mm]		symbol	
	min		min	
A	6.40	A	6.40	A
B	5.25	B	5.25	B
C	(0.65)	C	(0.65)	C
D	0.63	D	0.63	D
E	2.28		E	
F	2.19	F	2.19	F
G	0.76	G	0.76	G
H	0.90	H	0.90	H
K	5.97	K	5.97	K
L	9.40	L	9.40	L
M	0.46	M	0.46	M
N	0.87	N	0.87	N
P	0.51	P	0.51	P
R	5.00	R	5.00	R
S	4.17	S	4.17	S
T	0.26	T	0.26	T
U	-	U	-	U

**Published by**  
**Infineon Technologies AG,**  
**Bereich Kommunikation**  
**St.-Martin-Strasse 53,**  
**D-81541 München**  
**© Infineon Technologies AG 2003**  
**All Rights Reserved.**

#### **Attention please!**

The information herein is given to describe certain components and shall not be considered as warranted characteristics.

Terms of delivery and rights to technical change reserved.

We hereby disclaim any and all warranties, including but not limited to warranties of non-infringement, regarding circuits, descriptions and charts stated herein.

Infineon Technologies is an approved CECC manufacturer.

#### **Information**

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office in Germany or our Infineon Technologies Representatives worldwide (see address list).

#### **Warnings**

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.