
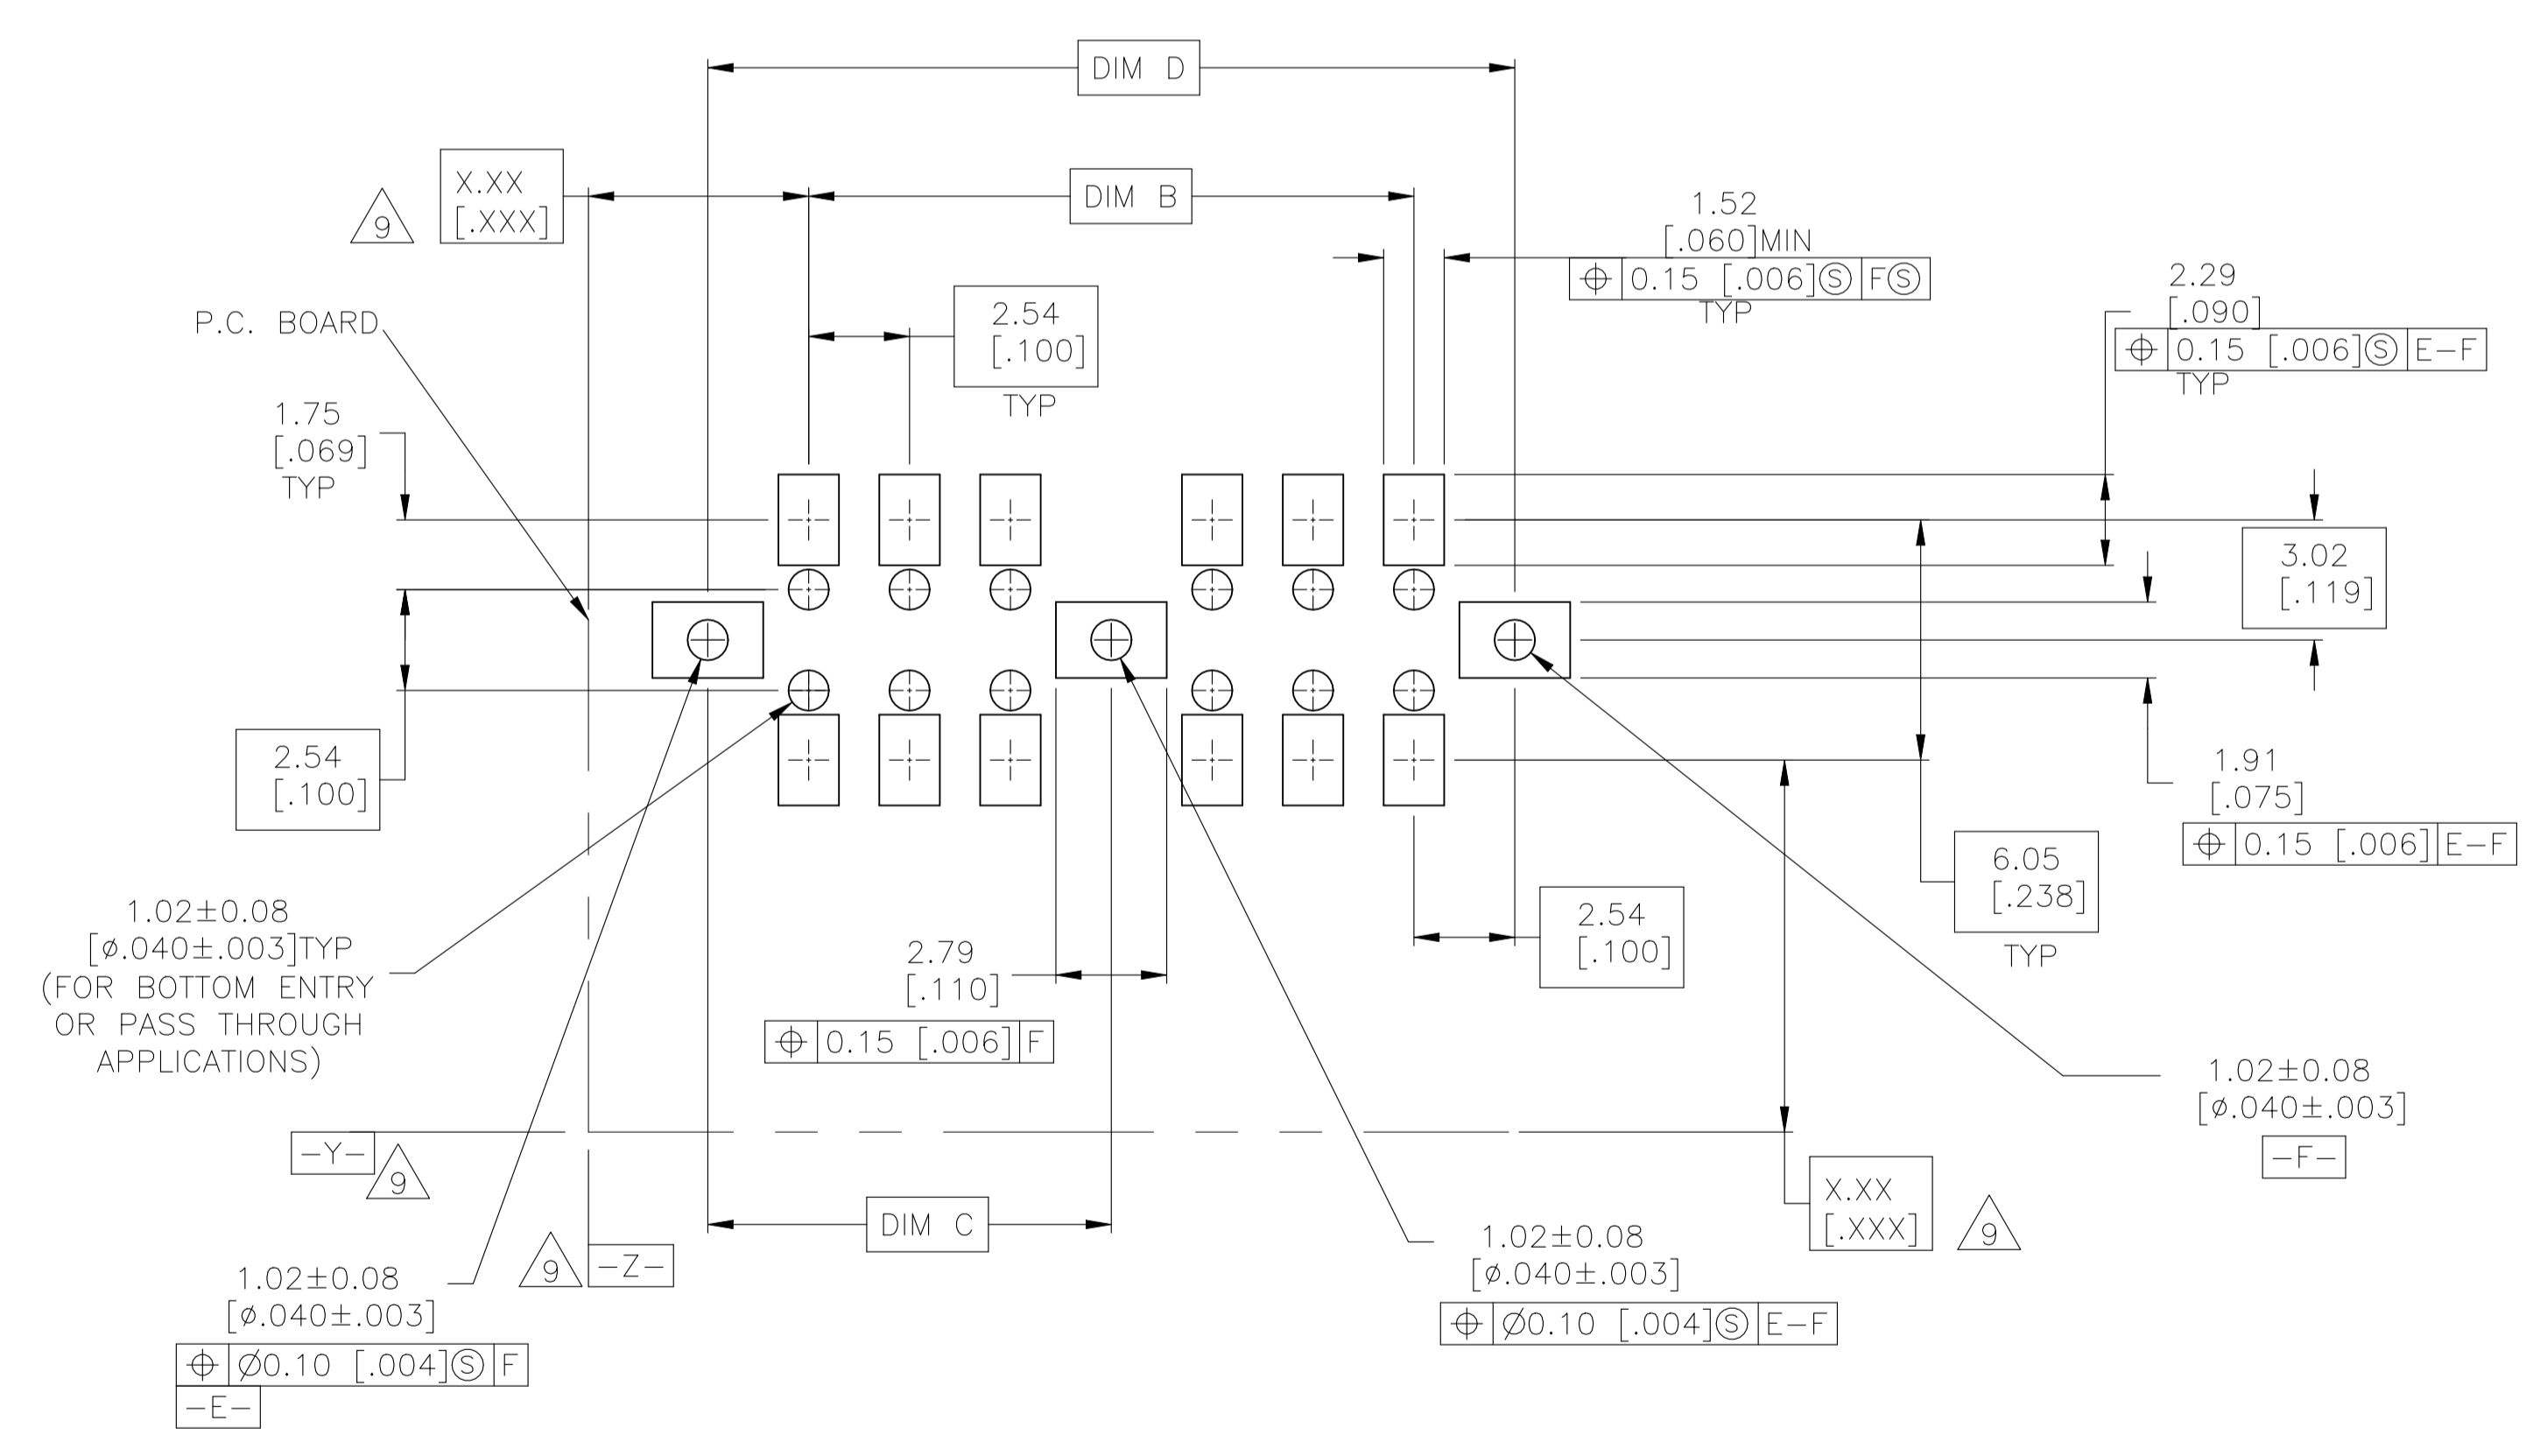
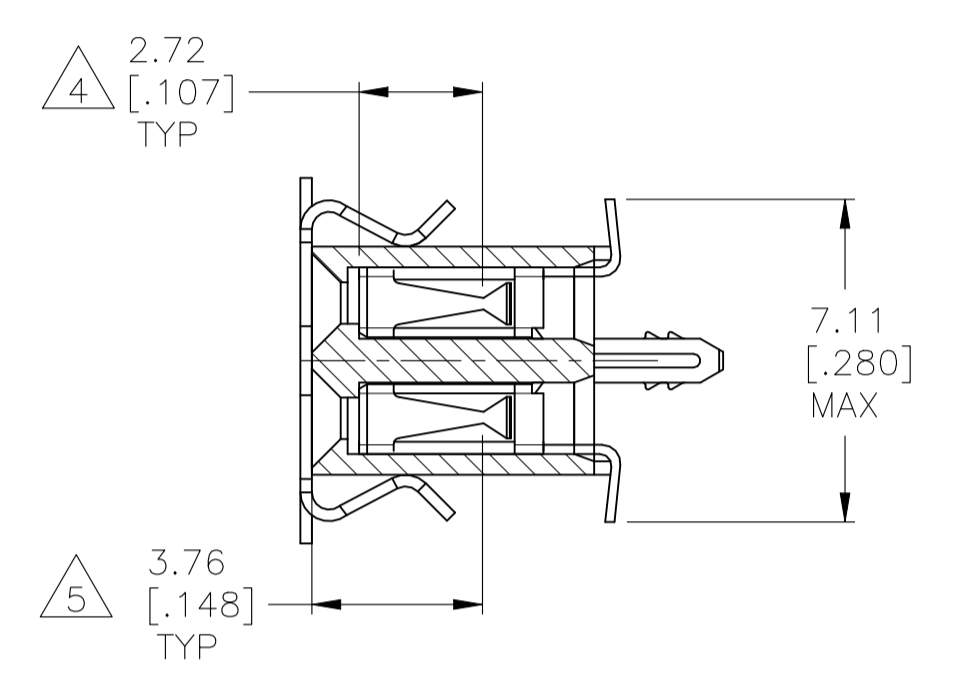
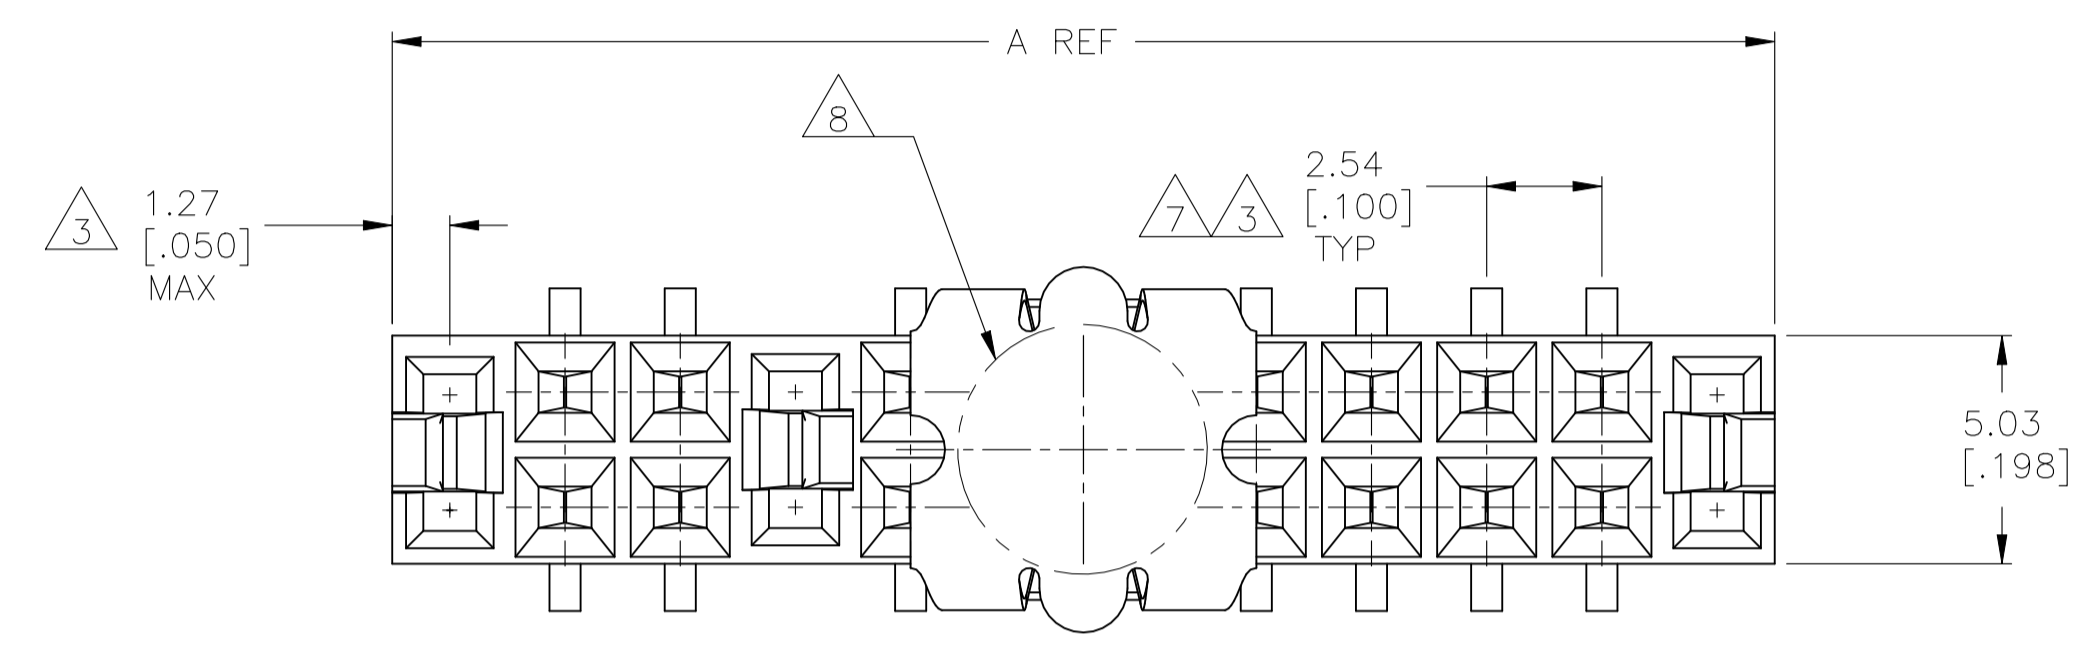



REVISIONS				
P	LTR	DESCRIPTION	DATE	BY
J		RESIN SUPPLIER CHANGE FOR THE HOUSING	26OCT2021	SCB/KJK

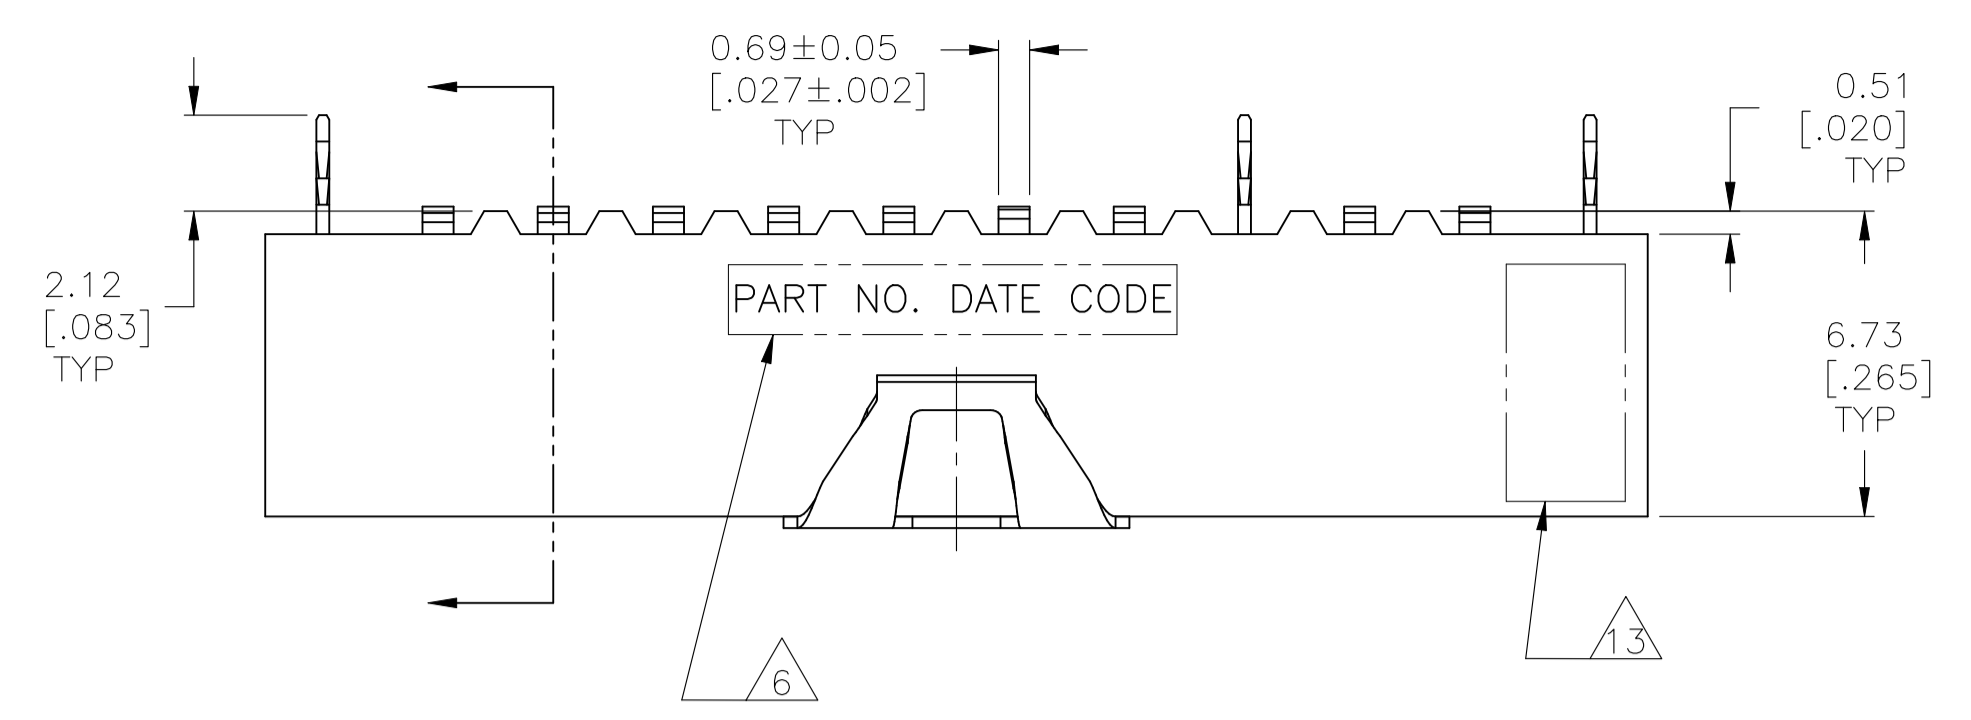

RECOMMENDED PC BOARD PAD PATTERN  
0.20[.008] THICK STENCIL



	N/A	106.68[4.200]	53.34[2.100]	101.6 [4.000]	109.22 [4.300]	80	4-147747-0		
		104.14[4.100]	50.80[2.000]	99.06 [3.900]	106.68 [4.200]	78	3-147747-9		
		101.60[4.000]	50.80[2.000]	96.52 [3.800]	104.14 [4.100]	76	3-147747-8		
	120mm	99.06[3.900]	48.26[1.900]	93.98 [3.700]	101.6 [4.000]	74	3-147747-7		
		96.52[3.800]	48.26[1.900]	91.44 [3.600]	99.06 [3.900]	72	3-147747-6		
		93.98[3.700]	45.72[1.800]	88.9 [3.500]	96.52 [3.800]	70	3-147747-5		
		88.90[3.500]		83.82 [3.300]	91.44 [3.600]	68	3-147747-4		
		86.36[3.400]		81.28 [3.200]	88.9 [3.500]	66	3-147747-3		
		83.82 [3.300]		78.74 [3.100]	86.36 [3.400]	64	3-147747-2		
		81.28 [3.200]		76.2 [3.000]	83.82 [3.300]	62	3-147747-1		
		78.74 [3.100]		71.12 [2.900]	81.28 [3.200]	60	3-147747-0		
		76.20 [3.000]		71.12 [2.800]	78.74 [3.100]	58	2-147747-9		
		71.12 [2.900]		68.58 [2.700]	76.2 [3.000]	56	2-147747-8		
	88mm	71.12 [2.800]		66.04 [2.600]	71.12 [2.900]	54	2-147747-7		
		68.58 [2.700]		63.5 [2.500]	71.12 [2.800]	52	2-147747-6		
		66.04 [2.600]		60.96 [2.400]	68.58 [2.700]	50	2-147747-5		
		63.50 [2.500]		58.42 [2.300]	66.04 [2.600]	48	2-147747-4		
		60.96 [2.400]		55.88 [2.200]	63.5 [2.500]	46	2-147747-3		
		58.42 [2.300]		53.34 [2.100]	60.96 [2.400]	44	2-147747-2		
	72mm	55.88 [2.200]		50.8 [2.000]	58.42 [2.300]	42	2-147747-1		
		53.34 [2.100]		48.26 [1.900]	55.88 [2.200]	40	2-147747-0		
		50.80 [2.000]		45.72 [1.800]	53.34 [2.100]	38	1-147747-9		
		48.26 [1.900]		43.18 [1.700]	50.8 [2.000]	36	1-147747-8		
		45.72 [1.800]		40.64 [1.600]	48.26 [1.900]	34	1-147747-7		
		43.18 [1.700]		38.1 [1.500]	45.72 [1.800]	32	1-147747-6		
		40.64 [1.600]		35.56 [1.400]	43.18 [1.700]	30	1-147747-5		
		38.10 [1.500]		33.02 [1.300]	40.64 [1.600]	28	1-147747-4		
		35.56 [1.400]		30.48 [1.200]	38.1 [1.500]	26	1-147747-3		
		33.02 [1.300]		27.94 [1.100]	35.56 [1.400]	24	1-147747-2		
		30.48 [1.200]		25.4 [1.000]	33.02 [1.300]	22	1-147747-1		
	44mm	27.94 [1.100]		22.86 [.900]	30.48 [1.200]	20	1-147747-0		
		25.40 [1.000]		20.32 [.800]	27.94 [1.100]	18	147747-9		
		22.86 [.900]		17.78 [.700]	25.4 [1.000]	16	147747-8		
		20.32 [.800]		15.24 [.600]	22.86 [.900]	14	147747-7		
		17.78 [.700]		12.7 [.500]	20.32 [.800]	12	147747-6		
		15.24 [.600]		10.16 [.400]	17.78 [.700]	10	147747-5		
		12.70 [.500]		7.62 [.300]	15.24 [.600]	8	147747-4		
		10.16 [.400]		5.08 [.200]	12.7 [.500]	6	147747-3		
		7.62 [.300]		2.54 [.100]	10.16 [.400]	4	147747-2		
	24mm	5.08 [.200]		-	7.62 [.300]	2	147747-1		
FINISH	EIA TAPE WIDTH	D	C	B	A	NO OF POSN	PART NUMBER		

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN	M. BINNER	20MAY02
mm [NCHES]		CHK	J. JOLSON	20MAY02
	0. PLC ± -	APVD	J. JOLSON	20MAY02
	1. PLC ± -	NAME	RCPT ASSY, MOD IV, DOUBLE ROW, VERTICAL, DUAL ENTRY, .100X.100 C/L, SURFACE MOUNT, AMPMODU	
2. PLC ± -	APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO
3. PLC ± 0.005(.13)	114-25022	A1	00779	147747
4. PLC ± 0.005(.013)	114-25018	WEIGHT	-	RESTRICTED TO
ANGLES ± -		CUSTOMER DRAWING		SCALE 6:1 SHEET 1 of 2 REV J

STE TE Connectivity Ltd.

REVISIONS				
REV	DATE	BY	APPV	DESCRIPTION
1				SEE SHEET 1

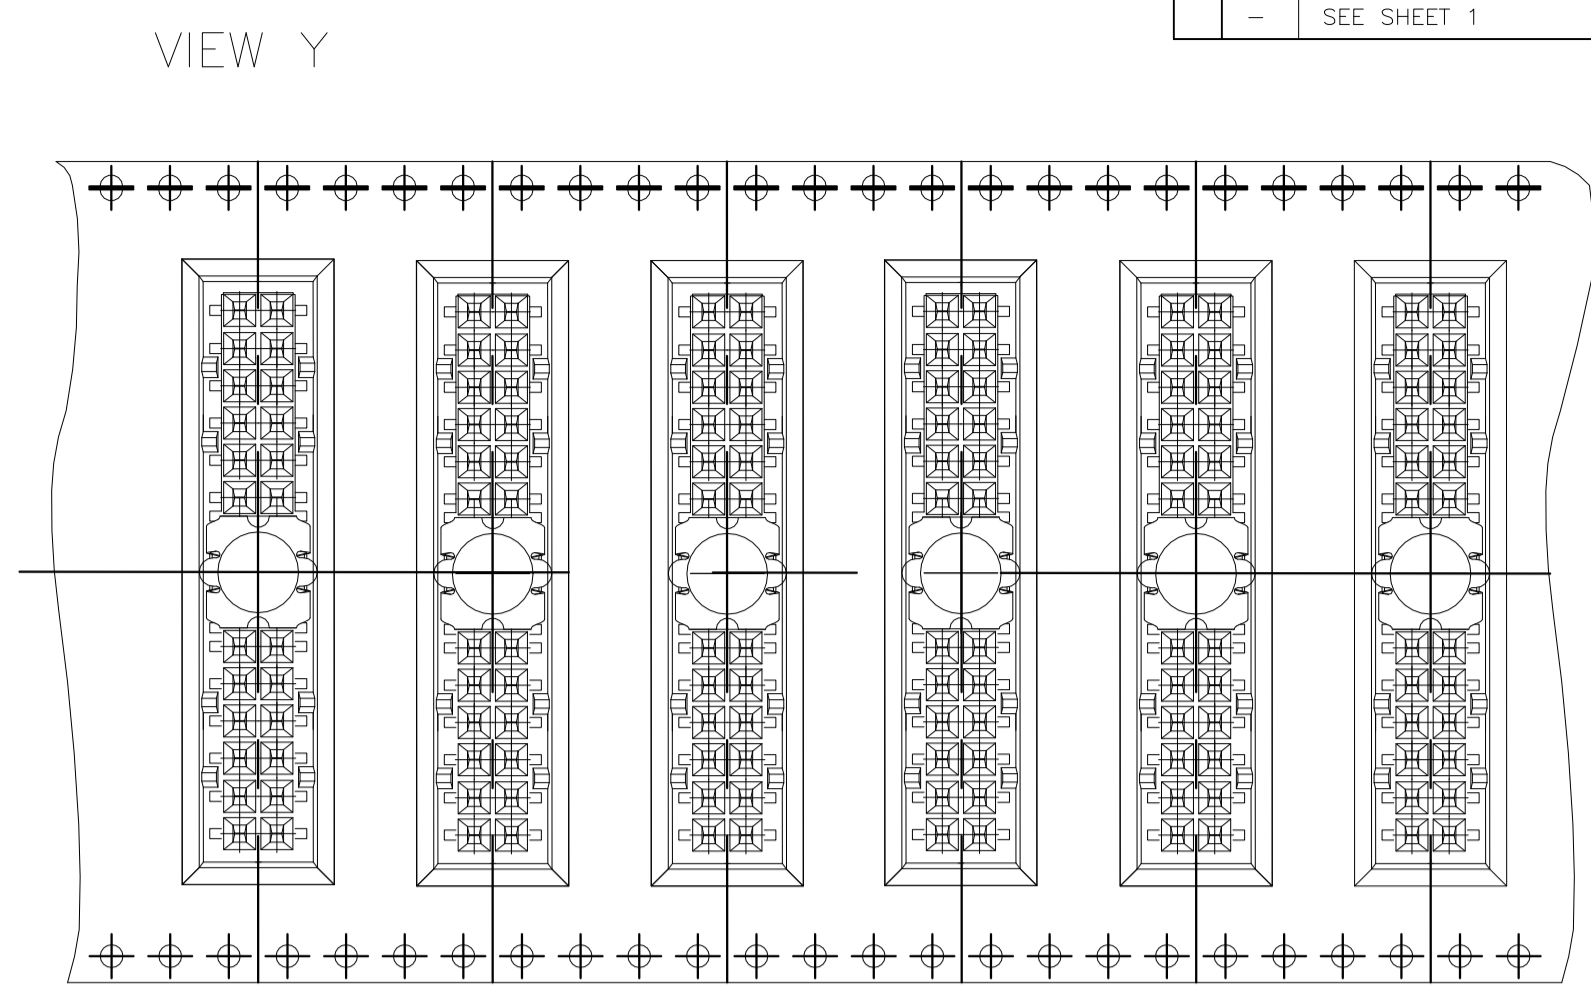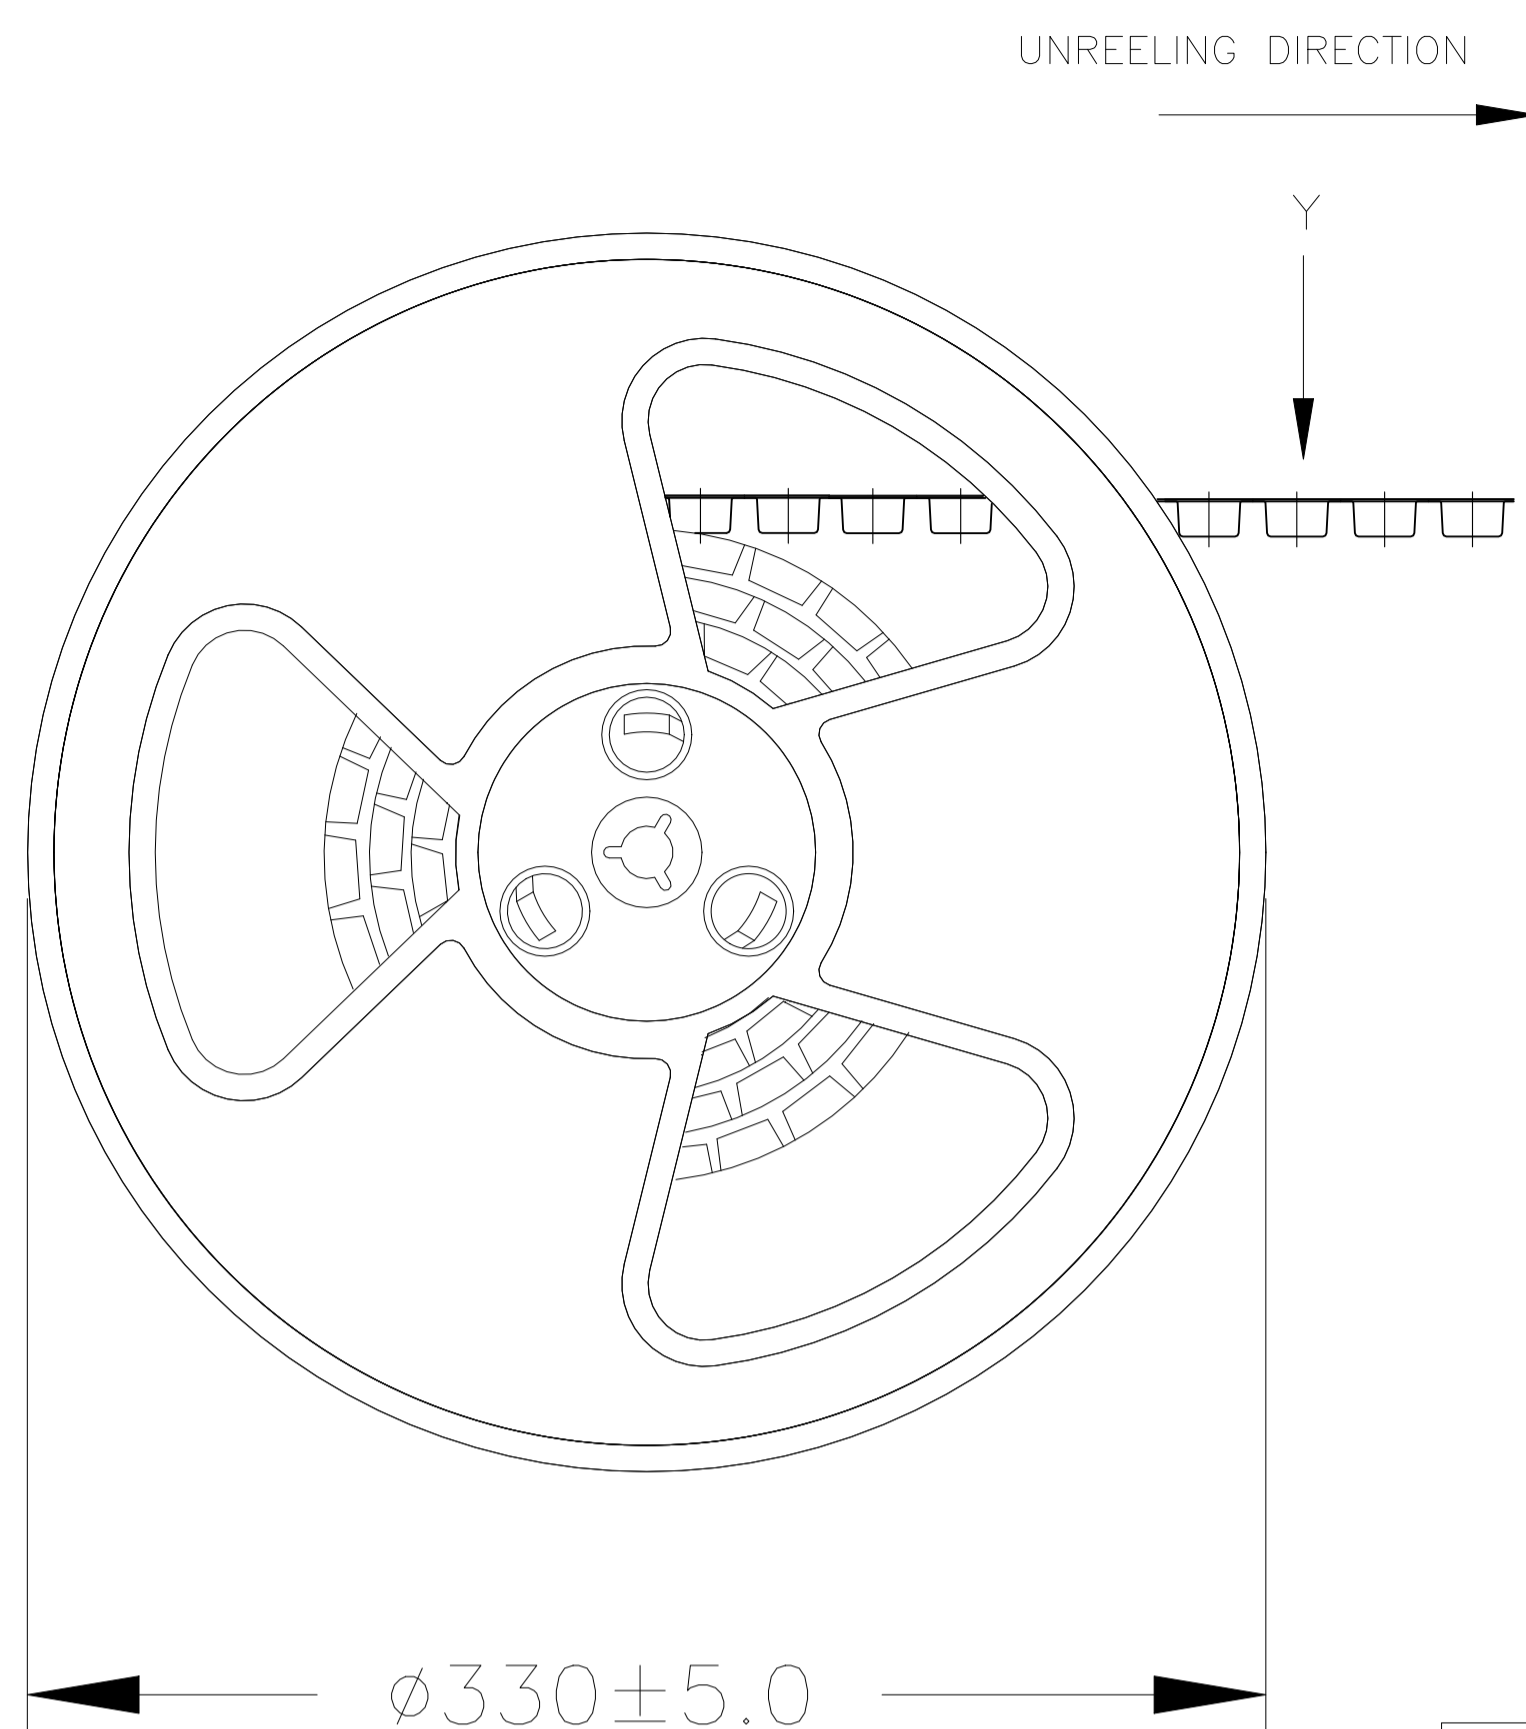

- 1 HOUSING: GLASS FILLED, FLAME RETARDANT POLYESTER, BLACK CONTACTS: PHOSPHOR BRONZE. VACUUM COVER: STAINLESS STEEL
- 2 CONTACTS: DUPLEX PLATED- 0.76μm[.000030] GOLD IN CONTACT AREA, 3.81-7.62μm [.000150-.000300] BRIGHT TIN-LEAD ON, LEADS, ALL OVER 1.27μm [.000050] MIN NICKEL.
- 3 DIMENSION APPLIES TO HOUSING CAVITY CENTERLINES ONLY.
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS.
- 5 POINT OF CONTACT DIMENSION.
- 6 MARK PART NUMBER AND DATE CODE IN APPROXIMATE LOCATION SHOWN, EITHER SIDE.
- 7 TOLERANCE IS NON-CUMULATIVE.
- 8 5.5 [.217] MIN TARGET AREA FOR VACUUM PICK-UP COVERS TO BE REMOVED AFTER SOLDERING.
- 9 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 10 NO CENTER HOLD DOWNS
- 11 PACKAGED IN TAPES AND REEL PER EIA 481 SPECIFICATIONS.
- 12 FOR 2 POS, DATE CODE IS STAMPED OPPOSITE SIDE OF TE LOGO.
- 13 TE TRADEMARK AND CSA LOGO ARE MOLDED INTO HOUSING.
- 14 NO PART NUMBER MARKING REQUIRED ON THIS PART.
- 15 CONTACTS: DUPLEX PLATED-0.76μm[.000030] GOLD IN CONTACT AREA, 3.81-7.62μm [.000150-.000300] MATTE TIN ON LEADS, ALL OVER 1.27μm [.000050] MIN NICKEL.
- 16 ROHS 2002/95/EC COMPLIANT

		106.68 [4.200]	53.34 [2.100]	101.6 [4.000]	109.22 [4.300]	80	9-147747-0	
		104.14 [4.100]	50.8 [2.000]	99.06 [3.900]	106.68 [4.200]	78	8-147747-9	
		101.6 [4.000]	50.8 [2.000]	96.52 [3.800]	104.14 [4.100]	76	8-147747-8	
		99.06 [3.900]	48.26 [1.900]	93.98 [3.700]	101.6 [4.000]	74	8-147747-7	
		96.52 [3.800]	48.26 [1.900]	91.44 [3.600]	99.06 [3.900]	72	8-147747-6	
		93.98 [3.700]	45.72 [1.800]	88.9 [3.500]	96.52 [3.800]	70	8-147747-5	
	120mm	88.9 [3.500]		83.82 [3.300]	91.44 [3.600]	68	8-147747-4	
		86.36 [3.400]		81.28 [3.200]	88.9 [3.500]	66	8-147747-3	
		83.82 [3.300]		78.74 [3.100]	86.36 [3.400]	64	8-147747-2	
		81.28 [3.200]		76.2 [3.000]	83.82 [3.300]	62	8-147747-1	
		78.74 [3.100]		71.12 [2.900]	81.28 [3.200]	60	8-147747-0	
		76.2 [3.000]		71.12 [2.800]	78.74 [3.100]	58	7-147747-9	
		71.12 [2.900]		68.58 [2.700]	76.2 [3.000]	56	7-147747-8	
		71.12 [2.800]		66.04 [2.600]	71.12 [2.900]	54	7-147747-7	
		68.58 [2.700]		63.5 [2.500]	71.12 [2.800]	52	7-147747-6	
	88mm	66.04 [2.600]		60.96 [2.400]	68.58 [2.700]	50	7-147747-5	
		63.5 [2.500]		58.42 [2.300]	66.04 [2.600]	48	7-147747-4	
		60.96 [2.400]		55.88 [2.200]	63.5 [2.500]	46	7-147747-3	
		58.42 [2.300]		53.34 [2.100]	60.96 [2.400]	44	7-147747-2	
		55.88 [2.200]		50.8 [2.000]	58.42 [2.300]	42	7-147747-1	
		53.34 [2.100]		48.26 [1.900]	55.88 [2.200]	40	7-147747-0	
		50.8 [2.000]		45.72 [1.800]	53.34 [2.100]	38	6-147747-9	
	72mm	48.26 [1.900]		43.18 [1.700]	50.8 [2.000]	36	6-147747-8	
		45.72 [1.800]		40.64 [1.600]	48.26 [1.900]	34	6-147747-7	
		43.18 [1.700]		38.1 [1.500]	45.72 [1.800]	32	6-147747-6	
		40.64 [1.600]		35.56 [1.400]	43.18 [1.700]	30	6-147747-5	
		38.1 [1.500]		33.02 [1.300]	40.64 [1.600]	28	6-147747-4	
		35.56 [1.400]		30.48 [1.200]	38.1 [1.500]	26	6-147747-3	
		33.02 [1.300]		27.94 [1.100]	35.56 [1.400]	24	6-147747-2	
		30.48 [1.200]		25.4 [1.000]	33.02 [1.300]	22	6-147747-1	
		27.94 [1.100]		22.86 [.900]	30.48 [1.200]	20	6-147747-0	
		25.4 [1.000]		20.32 [.800]	27.94 [1.100]	18	5-147747-9	
		22.86 [.900]		17.78 [.700]	25.4 [1.000]	16	5-147747-8	
		20.32 [.800]		15.24 [.600]	22.86 [.900]	14	5-147747-7	
		17.78 [.700]		12.7 [.500]	20.32 [.800]	12	5-147747-6	
		15.24 [.600]		10.16 [.400]	17.78 [.700]	10	5-147747-5	
		12.7 [.500]		7.62 [.300]	15.24 [.600]	8	5-147747-4	
		10.16 [.400]		5.08 [.200]	12.7 [.500]	6	5-147747-3	
		7.62 [.300]		2.54 [.100]	10.16 [.400]	4	5-147747-2	
	24mm	5.08 [.200]		-	7.62 [.300]	2	5-147747-1	
	FINISH	EIA TAPE WIDTH	D	C	B	A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0. PLC	± .005
1. PLC	± .005
2. PLC	± .005
3. PLC	± .005(.13)
4. PLC	± 0.005(.013)
ANGLES	± .005

MATERIAL: 1

FINISH: 2-15

DATE: 20MAY02

DESIGNER: M. BINNER

CHECKER: J. OLSON

DATE: 20MAY02

APPROVED: J. OLSON

DATE: 20MAY02

NAME: RCPT ASSY, MOD IV, DOUBLE ROW, VERTICAL, DUAL ENTRY, .100X.100 C/L, SURFACE MOUNT, AMPMODU

PRODUCT SPEC: 108-25022

APPLICATION SPEC: 114-25018

WEIGHT: -

SCALE: A1 00779 C=147747

CUSTOMER DRAWING

SCALE: 1:1

SHEET: 2 of 2

REV: J