Type PHC PCB Mounted Horizontal Fuse Holder 5mm x 20mm



www.optifuse.com

(800) 621-0326

Electrical Rating: 6.3A, 250VAC

Operating Power: 2.5 W **Fuse Style:** 5mm x 20mm

Material: Frame and Cap: Thermoplastic (UL Flame: 94V-0)

Terminal: Nickel Plated Copper Alloy

Panel Thickness: .031 Min / .177 Max [.08mm Min, 4.5mm Max]

Mounting: PCB mounting

Cap: Finger Grip / Screwdriver Slot Combo

Bayonet Knob

Agency Standards and Listings:













Product Dimensions: Inches[mm]

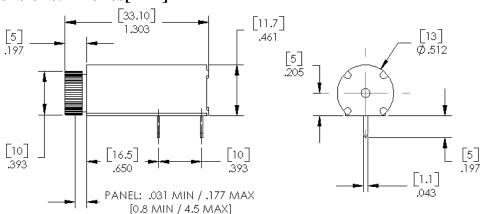

Mounting Holes: Inches[mm]



Warning:

-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.



⁻Fuse Holders are not intended for circuit disconnect. All power should be disconnected before removing fuse. -Avoid contact of Fuse Holder with chemical solvent. Prolonged contact will damage the device performance.

Note: All specifications subject to change without notice.

Rev B 02/2007 - Page: 1/1

Code: S03