

TECHNICAL DATA SHEET

Part#: 2A-SA



Tweezers - Straight Tapered Flat Point - ★★★ - Anti-Mag. SS

The 2A-SA three star straight tapered flat pointed tweezer is designed for handling labels or SMD components. The overall length is 4.75" and it is made of anti-magnetic Neverrust[®] stainless steel. The tips measure .059" wide by .008" high.

- Precision Level ★★★
- Material Anti-Mag. SS (316L)
- Surface Resistivity Conductive
- Shape Straight Tapered
- Group Tweezers
- Weight (OZ) 1
- Tip Size (CTM) .059" (1.5mm) x .008" (.2mm)
- Tip Angle n/a
- Tip Length n/a
- Body Width 0.393" (9.83mm)
- Body Height One Leg .06" (1.5mm)
- OAL 4.75" (118.75mm)
- Country of Origin Switzerland
- UPC 662847002205
- Schedule B 8203.20.20.00
- Harmonization Code 8203.20.20
- ECCN EAR99
- UNSPSC Code 27112105



C.T.M.
Critical Tip Measurements
(Tip Width and Thickness of one point)

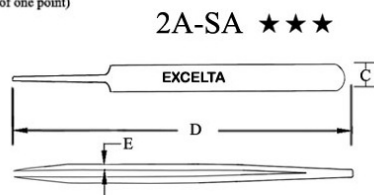

EXCELTA[®]
CORPORATION

- A) 0.059"
- B) 0.0078"
- C) 0.393"
- D) 4.75"
- E) 0.060"