

Ŧ	۵	п	m	O





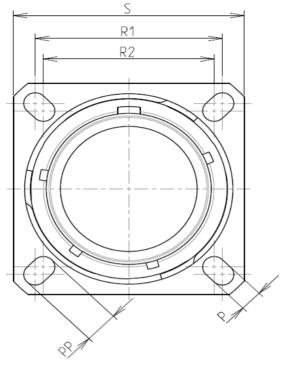

Keying Shown as example

CHARACTERISTICS

ω

 \sim

-Mass

BASIC SERIES:

SHELL SIZE: 11

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Mater	ial : Alun	ninium
-Shell Plating	g : Olive	e drab Cadmium
-Insulator	: Ther	moplastic
-Contacts	: Cop	per Alloy
-Seals & Gro	mmet : Silico	on Elastomer
-Contact Pla	ting : Gold	l over copper Alloy 0.8µm minimum
-Durability	: 500	Mating cycles
-Delivered w	ith Souriau conta	cts and Accessories
-Temperatur	e Range _: -65°	°C to +175°C
-Salt Spray	: 500	hours

: 11.5 g ± 10%

8D 0

G

11

-

W

22

F

A N

Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		

m	D	0	σ	A	
					4
nector dimension Nominal 3.25±0.2 4.93±0.2 20.62 18.26 26.2±0.3		SOURIAU shall not due to a use of the Specifications iss	JT SHOWN AS EXAMPLE be liable for any non-conform the Products which does not co sued by either of the Parties or al recommendation, technical r	omply with by a third party	3
20.83+0/-1.25 2.1/2.5 31.5 Max AD M15x1-6g		Country Jurisdiction & Control List FR Not Listed PN: 8D011W22AN			2
	A 08-10-202 ISS DATE Designed By: TITLE SCALE	16 First Release Latest modification - Date:	by Aluminium Receptac	CUSTOMER DRAWING	MOD N°
ORIENTATION : N CONTACT TYPE : PIN(500 Matings)	NA SOURIAU	Tolerances: 859 ± This document is the prosource WWW.SOURIAU.COM This document is the product it must not be reproduct SOURIAU it must not be reproduct communicated without product		rmission	
E	FORMAT A3 D		SOURIAU DRG N° 8D011W22AN-C B	A	SHEET 1/2

	-					
		Contact Layout				Panel Cuto
		22*				SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
4	(0 0 0 0			2	
	Ctc A B	4#22D 11-22 X Y 1.905 1.905 1.905 -1.905			¥	ØI.
	C D	-1.905 -1.905 -1.905 1.905	-			Dim ØA
ω		-1.505 1.505]			ØAA R1
						ØT
						SOURIAU shall not be liable for a due to a use of the Products w the Specifications issued by either (professional recommenda
N						Coun FR
						PN: 8D011
					A 08-10- ISS DAT Designed By:	2016 First Release E Latest modification - by Date:
					TITLE	Aluminiu
<u> </u>					SCALE NA	General linear Tolerances: ±
					SOURI	
					FORMAT A3	SOURIAU 8D011W
	Н	G	F	E	D	C
					V	

Т

ш

т

G

0

