


**PACKAGE: INDIVIDUAL PE BAG.**

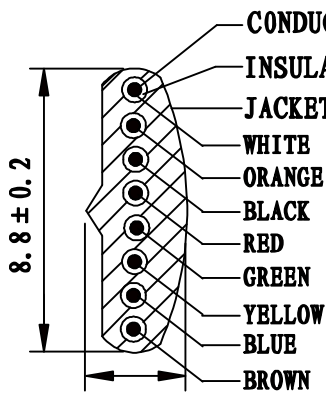


**CONDUCTOR: [26AWG (0.16/7) BARE COPPER] X8C**  
**INSULATION: [PP6331 ID: 0.95 ± 0.03] X8C**  
**JACKET: PVC NOUL 65P**

**NOTE FOR PLUG:**  
**MATERIAL: HOUSING-POLYCARBONATE, CLEAR.**  
**TERMINAL-0.36 [ .014 ] THICK PHOSPHOR BRONZE.**  
**THICK GOLD IN LOCALIZED GOLD PLATE.**  
**AREA, GOLD FLASH OVER THE REMAINDER.**  
**OVER 2.54um [ .000100 ] THICK NICKEL**  
**UNDERPLATE.**

P1	P2
1 <u>WHITE</u>	1
2 <u>ORANGE</u>	2
3 <u>BLACK</u>	3
4 <u>RED</u>	4
5 <u>GREEN</u>	5
6 <u>YELLOW</u>	6
7 <u>BLUE</u>	7
8 <u>BROWN</u>	8


**2.4 ± 0.2**  
**SEC: A=A**

NO	ITEM	DESCRIPTION	Q' TY
①	CABLE		1 PCS
②	PLUG	8P8C 50U"	2 PCS
③	CABLE TIE		1 PCS
④			
⑤			
⑥			



**A, B, C, D, E. Folding**

PART NO	DRAWING NO	WIRE LENGTH "L"	BUYER COLOR	VENDOR COLOR	CUT LENGTH
512-26-8800-WH-0005F	A	1525 ± 20 (5FT)	White	W-103 LIGHT	1525-1535MM
512-26-8800-WH-0007F	B	2135 ± 30 (7FT)	White	W-103 LIGHT	2135-2145MM
512-26-8800-WH-0010F	C	3050 ± 60 (10FT)	White	W-103 LIGHT	3050-3060MM
512-26-8800-WH-0012F	D	3660 ± 60 (12FT)	White	W-103 LIGHT	3660-3670MM
512-26-8800-WH-0014F	E	4270 ± 60 (14FT)	White	W-103 LIGHT	4270-4280MM
512-26-8800-WH-0025F	F	7625 ± 100 (25FT)	White	W-103 LIGHT	7625-7635MM
512-26-8800-WH-0050F	G	15250 ± 150 (50FT)	White	W-103 LIGHT	15250-15260



**F, G. Folding**

REVISE	VERSION	BASIS	CONTENTS
12-02-20	A/0	T0210A	NEW DRAWING

CnC Tech, LLC	
Industrial Cable and Connector Technology	
IDRAWING NO: 671-324	CUSTOMER: L-671
ITEM NO: 8C CABLE P+P PLUG	UNIT: mm
DATE: 2012-02-20	ISSUE: (A/0)
DRAWN: QE	QA:
SALES DEPT:	SALES MANAGER: