

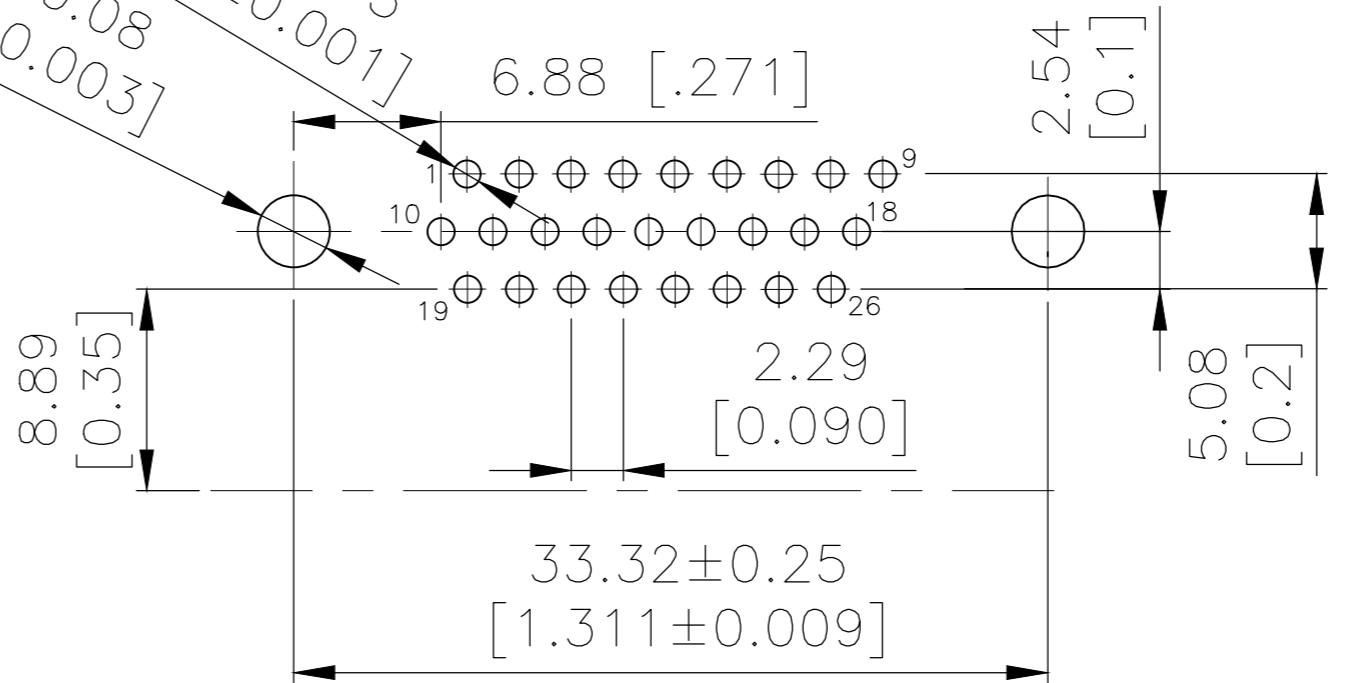
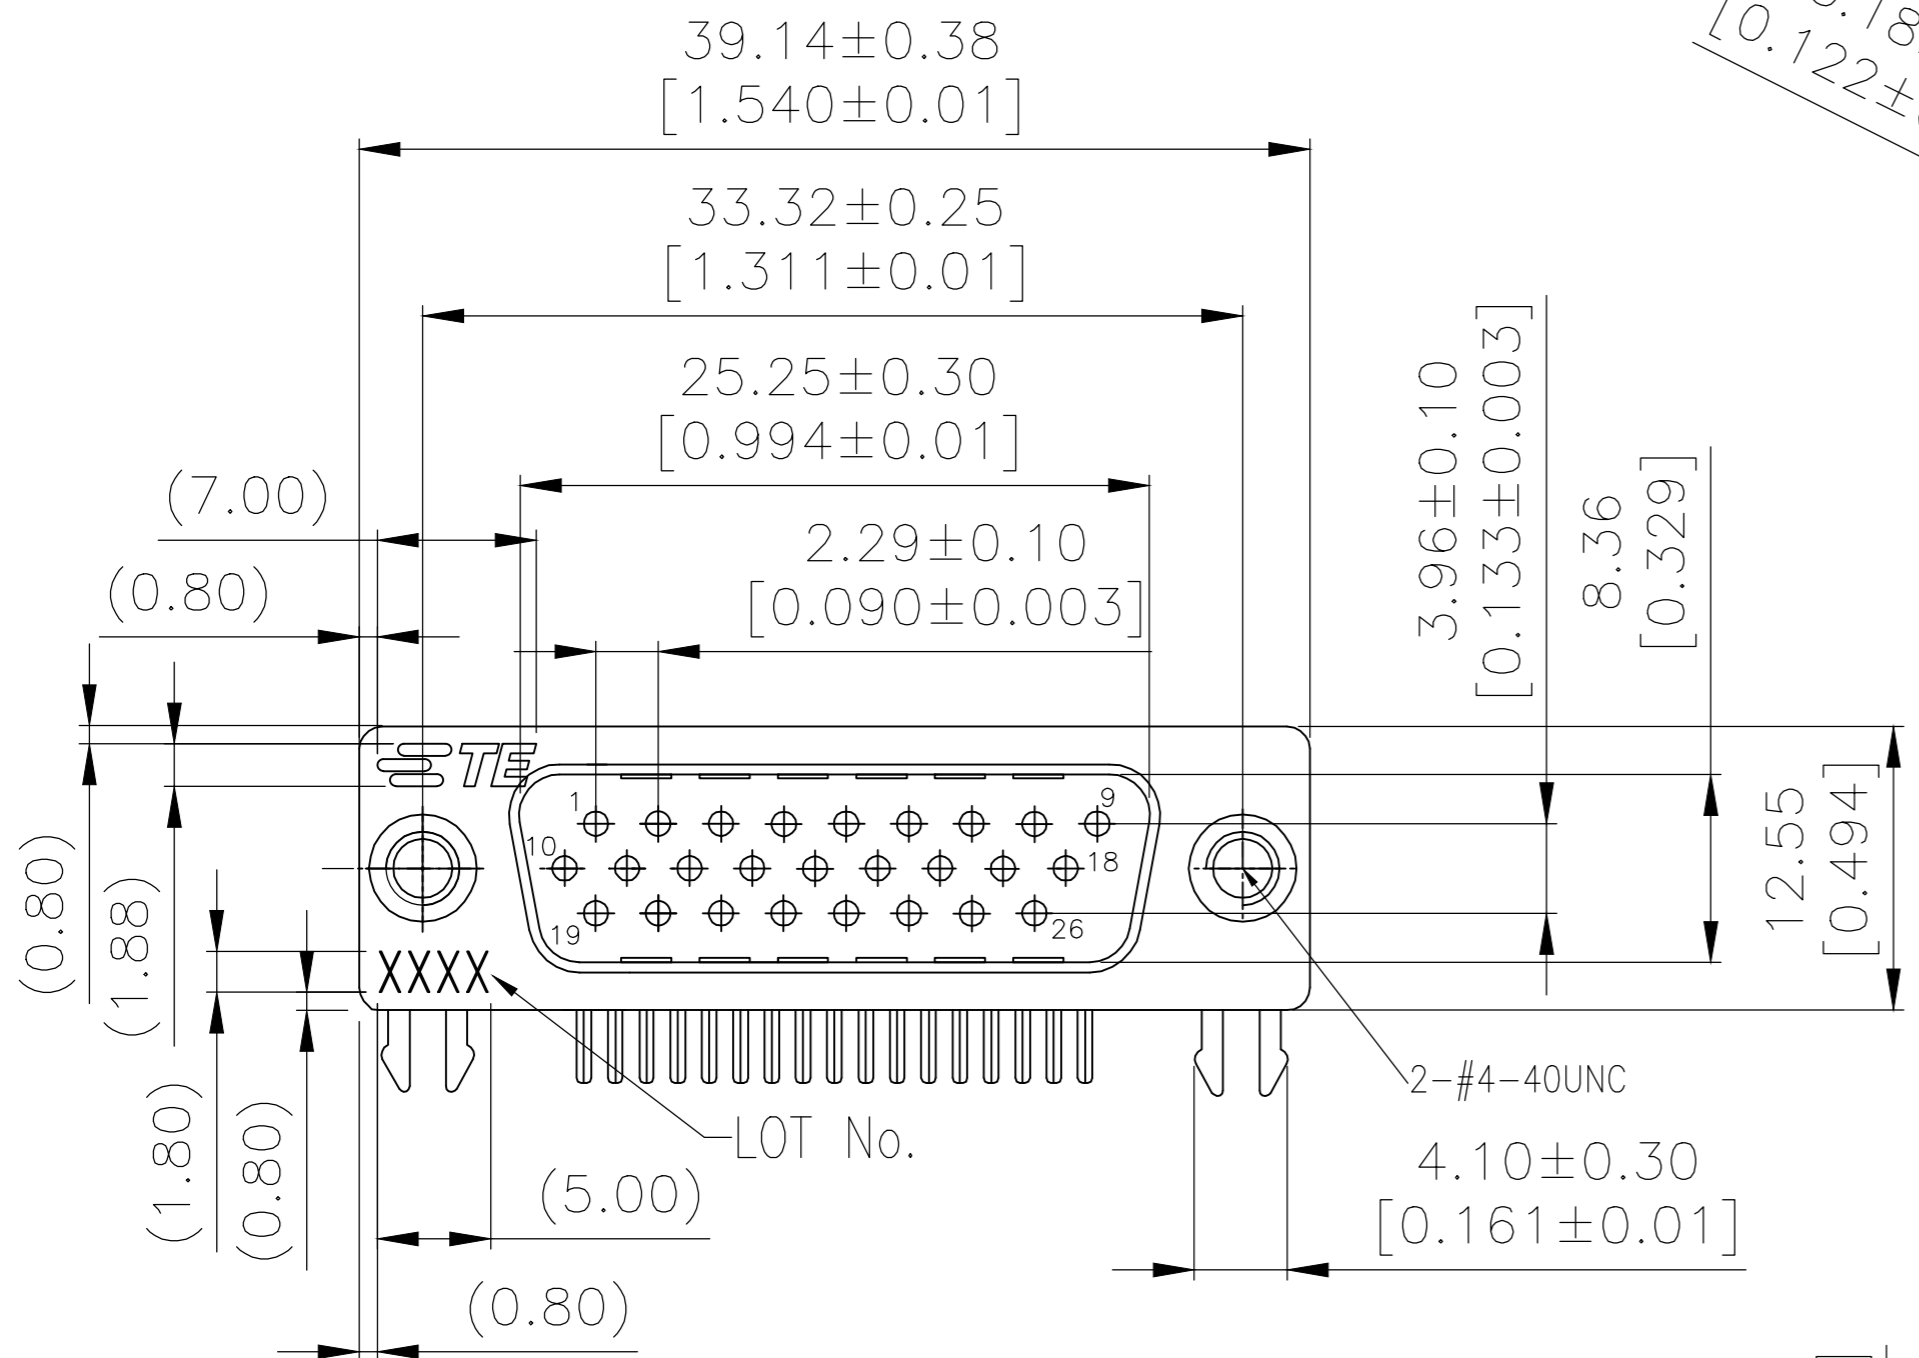


RECOMMENDED PCB LAYOUT  
 TOLERANCE IS ±0.05

REVISED PER ECO-18-008015		DATE	DWN	APVD
P	LTR			
D		24MAY2018	AP	DG

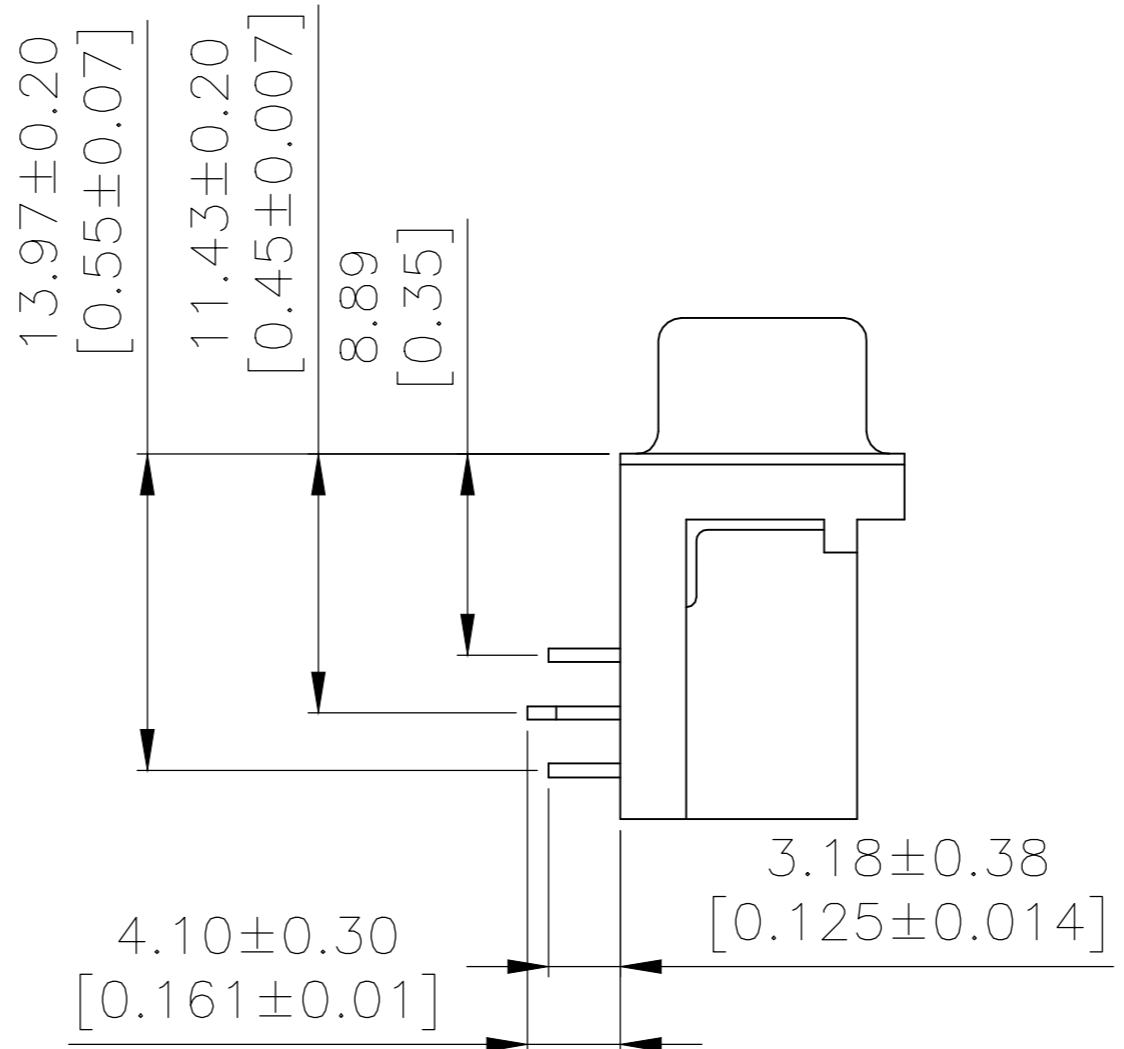

NOTES:  
 Housing:PBT+30%GF(UL94V-0) BLACK  
 Contact:Brass  
 " GOLD PLATING ON CONTACT AREA  
 100u" MATTE TIN PLATING ON SOLDERTAIL  
 50u" NICKEL UNDERPLATED OVERALL  
 Holddown:Brass,100u" TIN OVER 50u" NICKEL  
 Shell:Cold Roller Steel,Ni Plated  
 Revit:Brass,Nickel Plating  
 LOT NUMBER "XXXX"  
 └─ Stands For Calendar Year  
 └─ Stands For Week Number

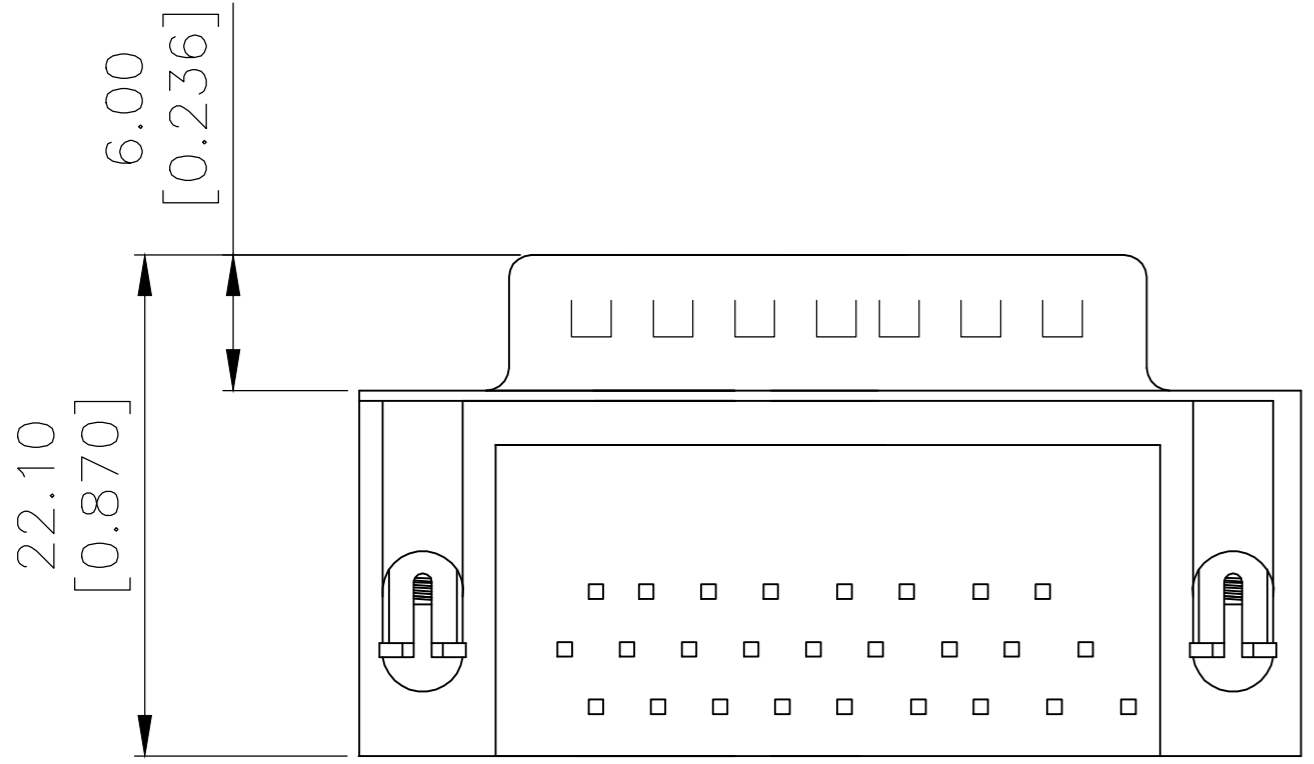

THREADED TYPE	30μ" Au Contact Area Plating	2311776-1 P/N
---------------	------------------------------	---------------

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN AJITH PAI 25FEB2017	TE Connectivity	
DIMENSIONS: mm		CHK DANIEL GORENC 25FEB2017	NAME AMPLIMITE PLUG, HD22, RIGHT ANGLE, 26P THREADED	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.25 3 PLC ± - 4 PLC ± - ANGLES ± -		APVD DANIEL GORENC 25FEB2017	PRODUCT SPEC 108-130023	
MATERIAL -	FINISH -	APPLICATION SPEC -	WEIGHT -	SCALE 1:1
CUSTOMER DRAWING			CAGE CODE A2 00779	DRAWING NO. C=2311776
			SHEET 1 of 1	REV D