
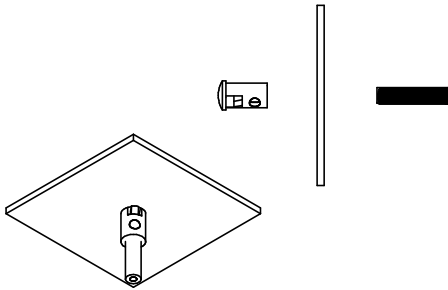



© COPYRIGHT 2010 BY INDUSTRIAL FIBER OPTICS, INC.
ALL RIGHTS RESERVED.

LIGHT PIPE PREPARATION/INSTALLATION:





NOTES:

1. ROHS COMPLIANT
2. UL 94V-2 FLAMMABILITY RATING
3. -40°C TO 85°C OPERATING TEMPERATURE
4. SUITABLE FOR LIGHT PIPE WITH Ø2.2mm JACKET AND OPTICAL CORE NO GREATER THAN Ø1.5mm



METRIC

REVISIONS					
REV	DESCRIPTION	ECO	DATE	DWN	APVD
A	Initial release		11/12/2008	BB	RD
B	Redrew, fixed diameter of mounting hole	0065	2/9/2010	BB	AR

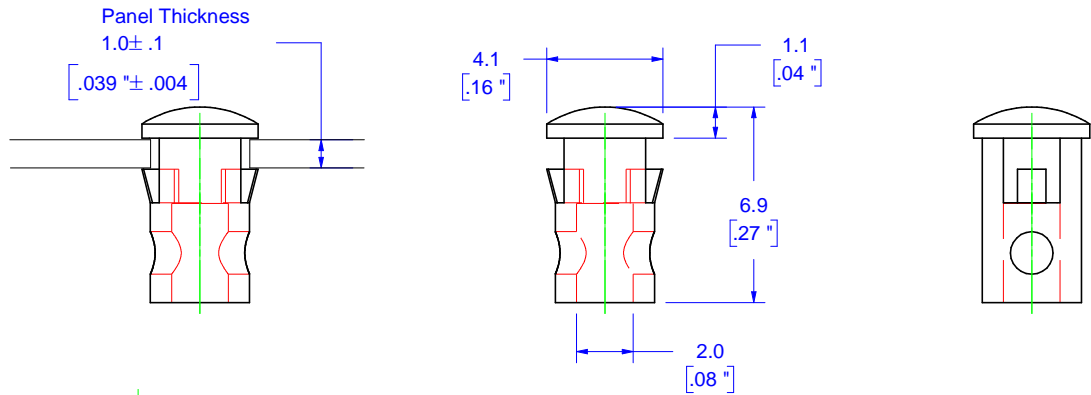

PART IS MADE OF TRANSPARENT POLYCARBONATE.

UNLESS OTHERWISE SPECIFIED DIMENSIONS MILLIMETERS [IN.]	PRODUCT	Light Pipe	INDUSTRIAL FIBER OPTICS TEMPE, AZ 85281			
	MATERIAL	Polycarbonate				
TOLERANCES 0 PLC: ± 1 1 PLC: ± .25 2 PLC: ± .127 3 PLC: ± .025 4 PLC: ± .013 ANGLE: ± 1/2° SURFACE TEXTURE: 3.2 ✓	FINISH		NAME			
	DRAWN BY	B. Bidwell	Lens, Light Pipe to Panel			
	DATE	2/9/2010				
	CHECKED BY	A. Reyes	SIZE	SCALE	PART NUMBER	REV
REMOVE BURRS AND SHARP EDGES FLATNESS .005mm PER mm ALL DIMENSIONS AFTER FINISH	DATE	2/11/2010	A	4:1	51 0350	B
			DO NOT SCALE DRAWING		Sheet 1 of 1	