

**Ratings**

Voltage: 600 V  
 Temperature: -40~105 °C  
 Flammability: FT2

**Conductor**

Conductor count: 10  
 Gauge: 26 AWG 0.13 mm<sup>2</sup>  
 Material: tinned copper strands  
 Strand size:  $\phi 0.08 \times 26$   
 Resistance at 20 °C: 150  $\Omega$  /km max

**Insulator**

Material: mPPE  
 Color: red, black, white, yellow, blue, green, orange, purple, gray, brown  
 Diameter:  $\phi 1 \pm 0.10$  mm  
 Average thickness: 0.25 mm  
 Resistance at 20 °C: 100 M $\Omega$  /km min

**Wrap**

Material: cotton paper



**Outer jacket**

Material: mPPE, 85A  
 Color: black  
 Diameter:  $\phi 5.7 \pm 0.20$  mm  
 Average thickness: 0.8 mm

**Wire marking:** E339579 UL AWM STYLE 21509 26 AWG 105°C 600V --- cUL AWM I A 105°C 600V FT2 TENSILITY

**Bend radius**

Minimum: 6 times diameter (34.2 mm)

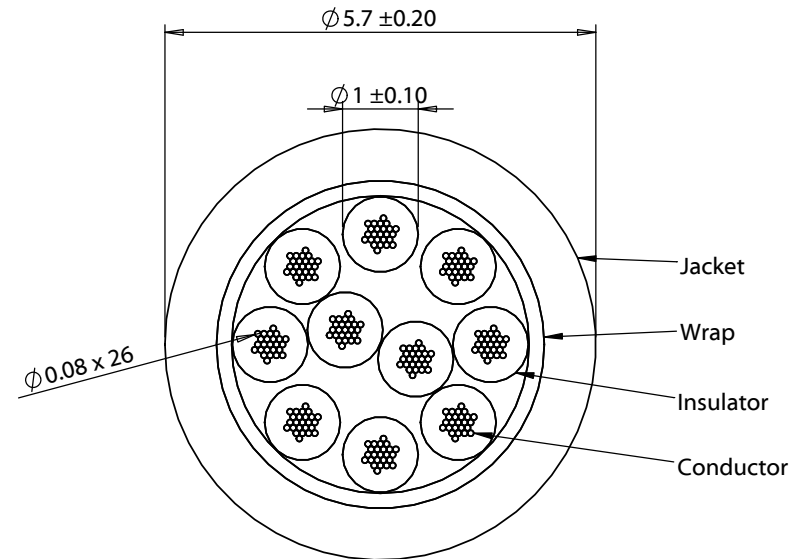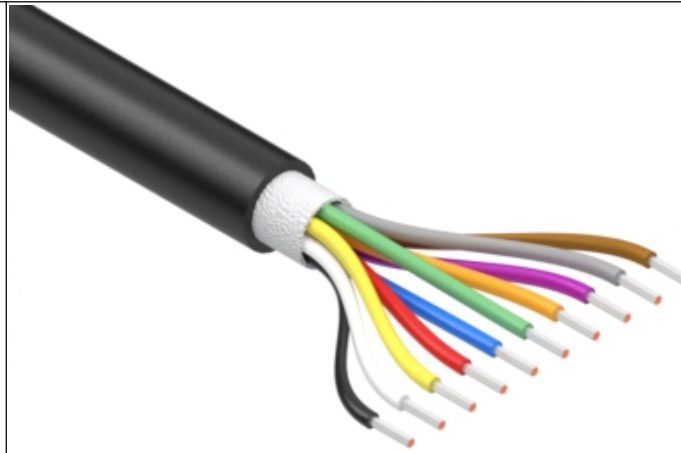

Revision:	Date:	Description:	Prepared: <b>AW</b> <small>Digitally signed by AW Date: 2021.05.19 11:30:44 -07'00'</small>	Notes:	<b>TENSILITY</b> <small>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</small>
A	5/4/2021	Initial release	Verified: <b>JC</b> <small>Digitally signed by JC Date: 2021.05.19 14:12:50 -07'00'</small>	RoHS compliant  Phthalate and halogen free	
			Dimensions are in millimeters. Tolerances: X: $\pm 0.5$ mm X.X: $\pm 0.3$ mm X.XX: $\pm 0.05$ mm	Description: Wire, 10C TS, 26 AWG, 21509, 600V, 105C, 5.7 mm, FT2, mPPE	Size: A Part number: <b>30-02042</b>
					Scale: 10:1  Sheet 1 of 1

5

4

3

2

1