


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
FT	0	A2		REVISED PER ECO-14-000707	20JAN2014	NK	RH

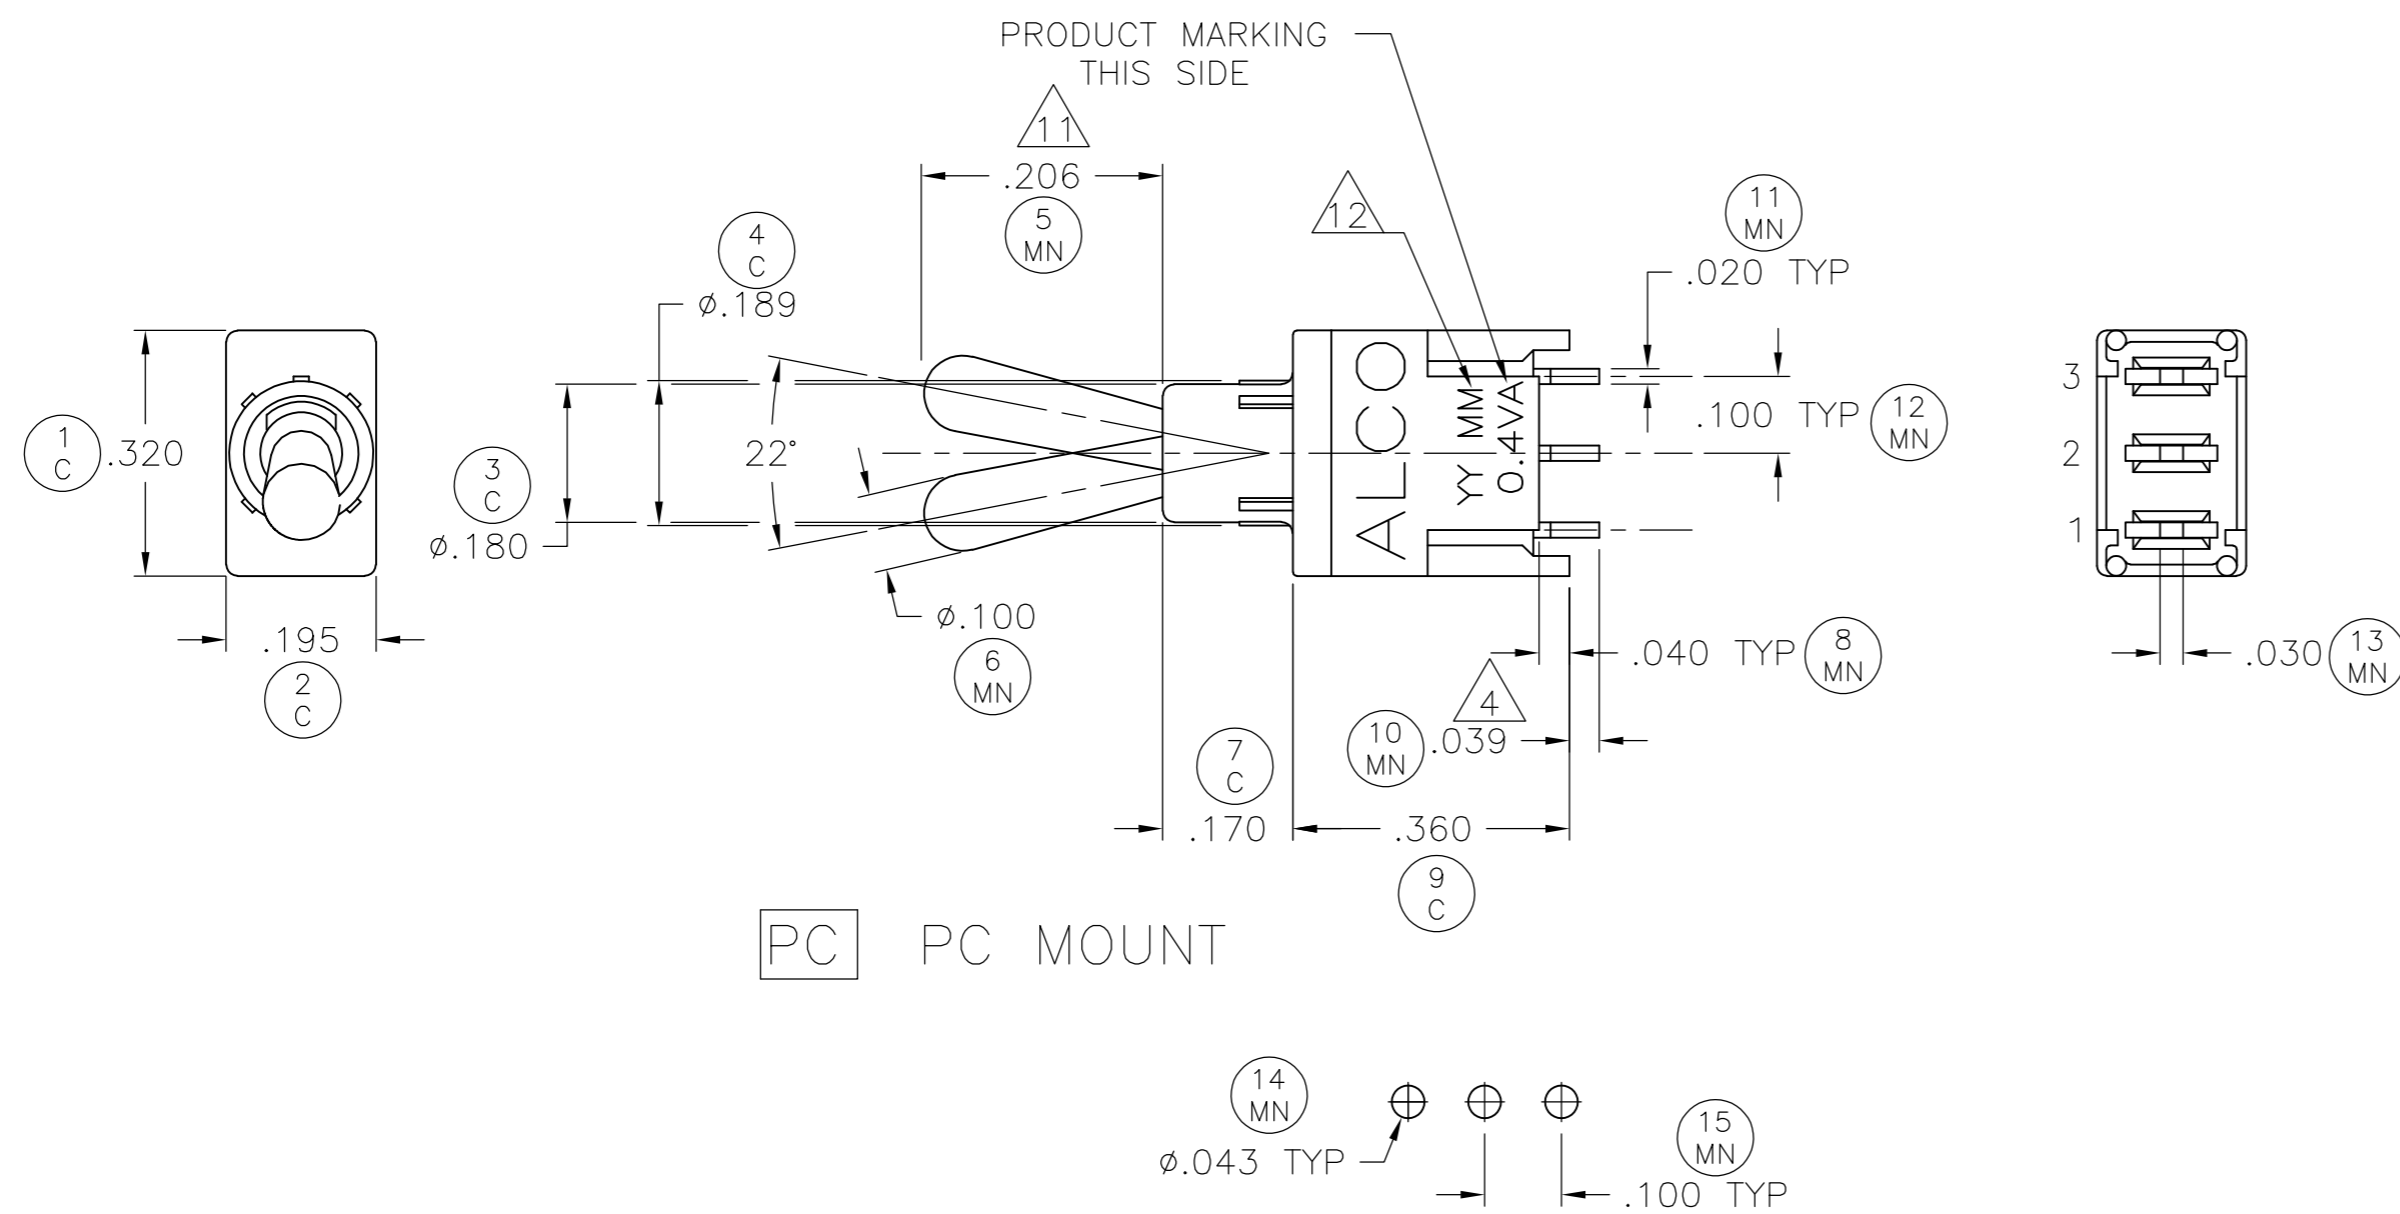

PC MOUNT

PC HOLE PATTERN
 TOLERANCES FOR ALL PCB LAYOUT DIMENSIONS TO BE ±.002


MATERIALS;
 CASE: GLASS FILLED HIGH TEMPERATURE POLYESTER.
 BUSHING: GLASS FILLED HIGH TEMPERATURE POLYESTER WITH ELECTROSTATIC DISSIPATIVE CHARACTERISTICS.
 ACTUATOR: NICKEL PLATED COPPER ALLOY.
 MOVABLE CONTACT: GOLD OVER NICKEL OVER COPPER ALLOY.
 STATIONARY CONTACT: GOLD OVER NICKEL OVER COPPER ALLOY.
 TERMINALS: TIN LEAD OVER COPPER ALLOY.
 TERMINAL SEAL: HIGH TEMPERATURE SEALANT.
 ACTUATOR SEAL: O-RING.

ELECTRICAL:
 CONTACT RATING: 0.4 VA @ 20 VDC OR PEAK AC.
 INITIAL CONTACT RESISTANCE: 30 MILLIOHMS MAX.
 INSULATION RESISTANCE: 1,000 MEGOHMS AT 500 VDC MIN.
 DIELECTRIC STRENGTH: 1,000 VOLTS RMS AT SEA LEVEL.
 LIFE EXPECTANCY: 60,000 CYCLES MECHANICAL ACTUATIONS AND 60,000 CYCLES AT 0.4 VA @ 20 VDC OR PEAK AC.

ENVIRONMENTAL:
 OPERATING TEMPERATURE: -22°F TO +185°F (-30°C TO +85°C).
 STORAGE TEMPERATURE: -67°F TO +185°F (-55°C TO +85°C).

QUALITY ASSURANCE:
 ALL CRITICAL DIMENSIONS, (C), MUST BE 1.5Cpk MINIMUM.

- 1 INTERPRET DRAWING PER ASME Y14.5M-1994.
- 2 PKG 100 PCS/BAG 1 BAG/BOX.
- 4 TERMINALS SHALL BE TRIMMED TO .039 PRIOR TO APPLICATION OF SEALANT.
- 5 "O" RING, WELDS AND SEALS SHALL BE TESTED USING AUGATS STANDARD BUBBLE TEST.
- 6 ACTUATION FORCE: 800 GRAMS MAX.
- 7 EACH TERMINAL SHALL WITHSTAND A 6 LBS PULL FORCE.
- 8 EACH TOGGLE SHALL WITHSTAND A 10 LBS PULL FORCE AND PUSH TEST OF 30 LB.
- 10 TERMINAL NUMBERS ARE NOT MARKED ON SWITCH. (FOR REFERENCE ONLY).
- 11 DIMENSION MEASURED IN CENTER OFF POSITION.
- 12 DATE CODE: YYMM (YEAR, MONTH)

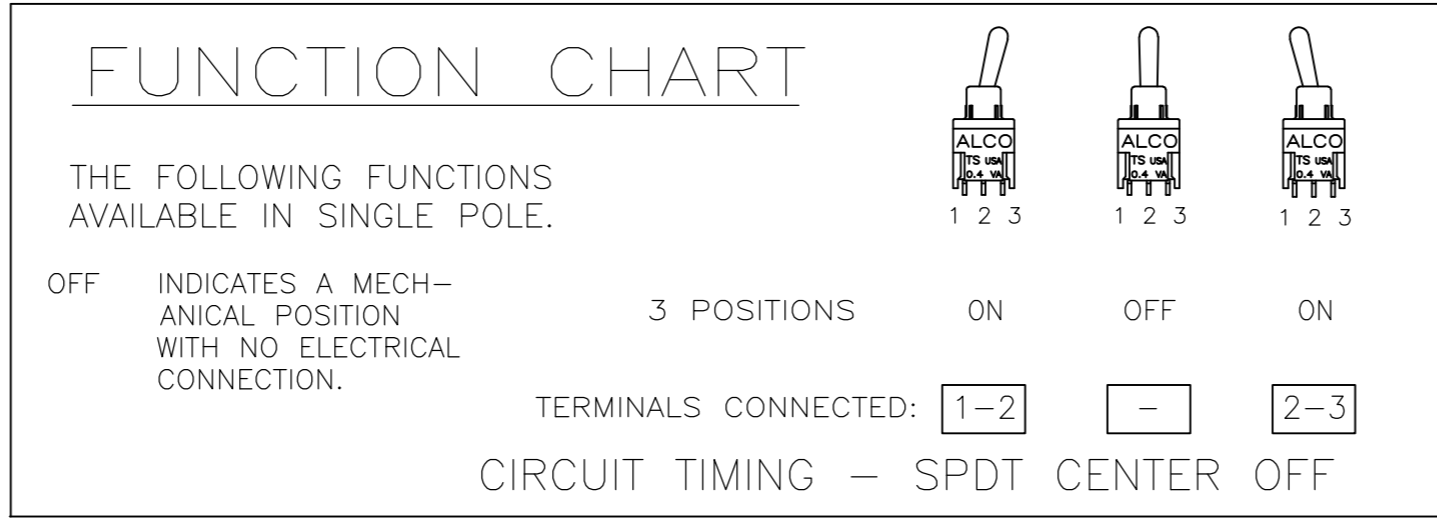

LEGEND:
 C = CRITICAL DIMENSION
 M = MAJOR DIMENSION
 MN = MINOR DIMENSION
 ST = STATISTICAL PROCESS CONTROLS

CRITICAL DIMS	MAJOR DIMS	LAST USED NO.	DELETED NO'S.	ST NO'S.
1,2,3,4,7,9		16		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL 19JAN2007	TE Connectivity	
DIMENSIONS: INCHES		CHK M SILBOURN 1/19/07	NAME TOGGLE SWITCH TST11EGPC1	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M WILBOURN 1/19/07	SIZE A2	
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .010 4 PLC ± - ANGLES ± 1°		PRODUCT SPEC APPLICATION SPEC	DRAWING NO 4-1437564-2	
MATERIAL FINISH		WEIGHT -	CAGE CODE 00779	RESTRICTED TO -
CUSTOMER DRAWING			SCALE 1:1	SHEET 1 of 1

4-1437564-2