

**STEP-Z**

TE Internal #: 5-1761613-5

PCB Mount Receptacle, Vertical, Board-to-Board, 104 Position, 1.3 mm [.051 in] Centerline, Gold, Surface Mount - Solder Ball, Power & Signal, Natural

[View on TE.com >](#)
[Connectors >](#) [PCB Connectors >](#) [PCB Headers & Receptacles](#)
PCB Connector Assembly Type: **PCB Mount Receptacle**PCB Mount Orientation: **Vertical**Connector System: **Board-to-Board**Number of Positions: **104**Number of Rows: **2****Features****Product Type Features**

PCB Connector Assembly Type	PCB Mount Receptacle
Connector System	Board-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

**Configuration Features**

Stackable	Yes
PCB Mount Orientation	Vertical
Number of Positions	104
Number of Rows	2
Board-to-Board Configuration	Parallel

**Electrical Characteristics**

Dielectric Withstanding Voltage (Max)	500 VAC
Insulation Resistance	18 MΩ
Operating Voltage	48 VAC

**Body Features**

Primary Product Color	Natural
-----------------------	---------

**Contact Features**

Contact Layout	Matrix
----------------	--------



Mating Tab Width	1 mm[.04 in]
Mating Tab Thickness	.2 mm[.008 in]
Contact Shape & Form	Dual Beam, Single Beam
PCB Contact Termination Area Plating Material	Tin-Silver
Contact Base Material	Copper Alloy
Contact Mating Area Plating Material	Gold
Contact Mating Area Plating Material Thickness	.76 $\mu\text{m}$ [29.9212 $\mu\text{in}$ ]
Contact Type	Socket
Contact Current Rating (Max)	1 A

### Termination Features

Termination Method to Printed Circuit Board	Surface Mount - Solder Ball
---	-----------------------------

### Mechanical Attachment

Mating Retention	With
Mating Alignment	Without
PCB Mount Retention	Without
PCB Mount Alignment	Without
Connector Mounting Type	Board Mount

### Housing Features

Centerline (Pitch)	1.3 mm[.051 in]
Housing Material	Thermoplastic

### Dimensions

Connector Height	10.65 mm[.419 in]
Row-to-Row Spacing	2 mm[.079 in]
Stack Height	15 mm, 17 mm, 18 mm, 20 mm, 25 mm[.984 in]
PCB Thickness (Recommended)	1.57 mm[.8 in]

### Usage Conditions

Operating Temperature Range	0 – 100 °C[32 – 212 °F]
-----------------------------	-------------------------

### Operation/Application

Assembly Process Feature	None
Circuit Application	Power & Signal

### Industry Standards



UL Flammability Rating	UL 94V-0
------------------------	----------

**Packaging Features**

Packaging Quantity	30
Packaging Type	Tray

**Product Compliance**

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Reflow solder capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

**Compatible Parts**

TE Part # 6-1761612-0 STEP-Z PLUG 10MM 104P LF ST	TE Part # 6-1761612-3 STEP-Z PLUG 13MM 104P LF ST	TE Part # 6-1761612-5 STEP-Z PLUG 15MM 104P LF ST	TE Part # 6-1761612-2 STEP-Z PLUG 12MM 104P LF ST



TE Part # 7-1761612-0  
STEP-Z PLUG 20MM 104P LF ST

## Customers Also Bought




TE Part #5787962-1  
.8MM CHAMP STACK RCPT ASSY



TE Part #2085945-1  
QSFP+ Assy, 2x1, Gskt, 2LP-Outr, Sn EONs



TE Part #2302014-2  
zSFP+ Cage Assembly: EMI Springs

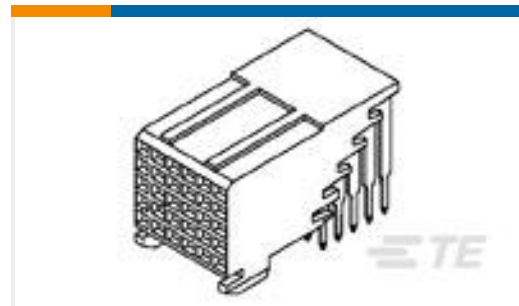

TE Part #5223008-1  
FB-5R,ASY,030,SIG,REC,EN,3.55



TE Part #1888971-4  
QSFP TB CAGE ASSY, W/LP, NO HS




TE Part #2317599-2  
2X8 SFP+, EMI SPRINGS, REVERSED LP



TE Part #2293156-7  
ZSFP+ 1X6 CAGE ASSY, PRESS-FIT, HS



TE Part #2302014-4  
ZSFP+ 1X8 CAGE ASSY, PRESS-FIT, LP, HS

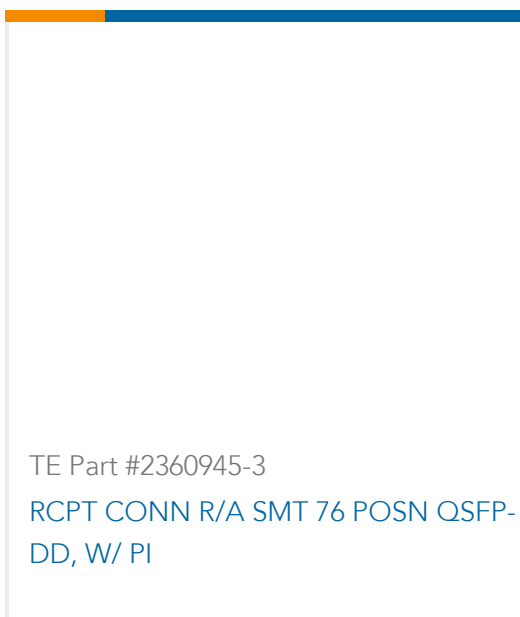

TE Part #2360945-3  
RCPT CONN R/A SMT 76 POSN QSFP-DD, W/ PI

## Documents

### Product Drawings

[STEP-Z RCPT 05MM 104P LF ST](#)

English

### CAD Files

[3D PDF](#)

[3D](#)

[Customer View Model](#)

[ENG\\_CVM\\_CVM\\_5-1761613-5\\_A.2d\\_dxf.zip](#)



English

**Customer View Model**

[ENG\\_CVM\\_CVM\\_5-1761613-5\\_A.3d\\_igs.zip](#)

English

**Customer View Model**

[ENG\\_CVM\\_CVM\\_5-1761613-5\\_A.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

---

**Datasheets & Catalog Pages**

[STEP-Z Interconnection System](#)

English

---

**Product Specifications**

[Application Specification](#)

English