

| т | ۵ | н п | m | 0 |
|---|---|------------|---|---|
| | | | | |





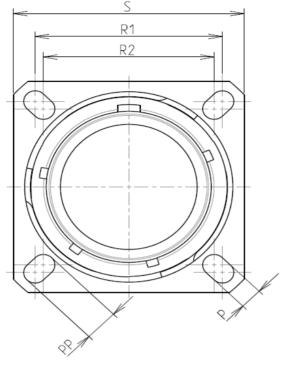

CHARACTERISTICS

ω

 \sim

-Mass

BASIC SERIES:

SHELL SIZE: 11

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

| -Shell Material | : Aluminium | | | | |
|--|--|--|--|--|--|
| -Shell Plating | : Olive drab Cadmium | | | | |
| -Insulator | : Thermoplastic | | | | |
| -Contacts | : Copper Alloy | | | | |
| -Seals & Grommet | : Silicon Elastomer | | | | |
| -Contact Plating | : Gold over copper Alloy 0.8µm minimum | | | | |
| -Durability | : 500 Mating cycles | | | | |
| -Delivered with Souriau contacts and Accessories | | | | | |
| -Temperature Range | : -65°C to +175°C | | | | |
| -Salt Spray | : 500 hours | | | | |

: 12.01 g ± 10%

8D 0

G

11

-

W

01

| Connector dimension Dim Nominal | | | | |
|---------------------------------|---------------|--|--|--|
| P | 3.25±0.2 | | | |
| PP | 4.93±0.2 | | | |
| R1 | 20.62 | | | |
| R2 | 18.26 | | | |
| S | 26.2±0.3 | | | |
| V | 20.83+0/-1.25 | | | |
| W | 2.1/2.5 | | | |
| Z | 31.5 Max | | | |
| VV THREAD | M15x1-6g | | | |

| П | т | C | ⊃ | 0 | œ | A | |
|--|---|---|---|--|---|--|--------------------|
| R | 1> | | | | | | 4 |
| Keying Shown a | Connector dimension Dim Nominal P 3.25±0.2 PP 4.93±0.2 R1 20.62 R2 18.26 S 26.2±0.3 V 20.83+0/-1.25 W 2.1/2.5 Z 31.5 Max VV THREAD M15x1-6g | | | SOURIAU shall not be lia due to a use of the Pro the Specifications issued b (professional reco | Country Jurisdie FR | nply with y a third party | 2 |
| P E | | | A 07-10-2016 ISS DATE Designed By: TITLE SCALE NA | First Release Latest modification - by Date: Alui Gener | DO11W01PE | NPRDS / PROJECT 859 This document is the prop | MOD N° Perty of |
| ORIENTATION : E CONTACT TYPE : PIN(500 Matings) CONTACT LAYOUT : 11-01 F E | | | SOURIAU FORMAT A3 | | RIAU.COM JRIAU DRG N° D11W01PE-C B | SOURIAU it must not be reproduc communicated without per | ed or |

| | | ۵ | г т | m | D | 0 |
|---|-----|-----------------------------|-----|-----|-----------------------------------|---|
| | | Contact Layout | | | | Panel Cutout |
| 4 | (| 01 | | | | SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING |
| | Ctc | 1#12 11-01 X Y 0 0 | | | ¥ | Dim |
| ယ | | | L | | | ØA ØAA R1 ØT |
| | | | | | | SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of (professional recommendati |
| а | | | | | A 07-10-202 | Country FR PN: 8D011W |
| | | | | | ISS DATE Designed By: TITLE | Latest modification - by Date: Aluminium |
| - | | | | | SCALE NA SOURIAU | General linear Tolerances: ± |
| | | | _ | - 1 | FORMAT A3 | SOURIAU 8D011W0 |
| | Н | G | l F | E | D | C |

