PIDG

TE Internal #: 2-36161-8


Ring Terminals & Spade Terminals, Ring Tongue, 10 AWG Wire Size, 6.11 mm² Wire Size, 12066 CMA Wire Size, Stud Size #10, Stud

Diameter 5 mm [.197 in]

View on TE.com >



Terminals & Splices > Ring Terminals & Spade Terminals > PIDG Ring Tongue Terminals

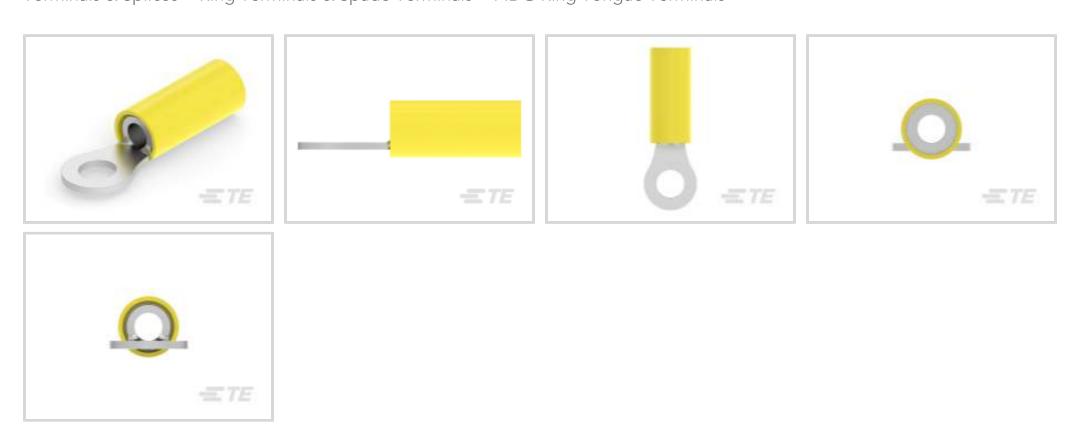

Ring & Spade Terminal Type: Ring Tongue

Wire Size: 12066 CMA

Stud Size: #10

All PIDG Ring Tongue Terminals (421)

Features

Product Type Features

Product Type Features	
Stud Size	#10
Sealable	No
Wire Insulation Support Retention Type	Insulation Restriction
Configuration Features	
Number of Holes	1
Electrical Characteristics	
Voltage Rating	300 V
Body Features	
Product Weight	1.924 g
Stripe Color	Brown
Contact Features	
Ring & Spade Terminal Type	Ring Tongue

Closed

Barrel Type



T 1 101 11	
Terminal Orientation	Straight
Terminal Plating Material	Tin
Mechanical Attachment	
Wire Insulation Support	With
Dimensions	
Wire Size	12066 CMA
Stud Diameter	5 mm[.197 in]
Tongue Thickness	.79 mm[.031 in]
Product Length	29.16 mm[1.148 in]
Compatible Insulation Diameter (Max)	5.08 mm[.2 in]
Compatible Insulation Diameter Range	3.02 – 5.08 mm[.119 – .2 in]
Usage Conditions	
Usage Conditions Insulation Option	Partially Insulated
	Partially Insulated 105 °C[221 °F]
Insulation Option	
Insulation Option Operating Temperature Range	
Insulation Option Operating Temperature Range Operation/Application	105 °C[221 °F]
Insulation Option Operating Temperature Range Operation/Application Compatible With Wire Base Material	105 °C[221 °F] Copper
Insulation Option Operating Temperature Range Operation/Application Compatible With Wire Base Material Compatible With Wire Plating Material	105 °C[221 °F] Copper
Insulation Option Operating Temperature Range Operation/Application Compatible With Wire Base Material Compatible With Wire Plating Material Industry Standards	105 °C[221 °F] Copper Tin
Insulation Option Operating Temperature Range Operation/Application Compatible With Wire Base Material Compatible With Wire Plating Material Industry Standards Government Qualified Terminal	105 °C[221 °F] Copper Tin

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2017 (173) SVHC > Threshold: Not Yet Reviewed



Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in
	other sources.

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

Compatible Parts













Also in the Series | PIDG





Compression Connectors(17)



Crimp Terminal Housings(1)



Crimp Wire Pins, Tabs & Ferrules(40)



Hand Crimping Tools(2)



Knife Disconnects(11)



PCB Terminals(9)



Quick Disconnects(49)



Ring Terminals & Spade Terminals(861)



Special Purpose Terminals(1)



Splices(47)



Customers Also Bought



TE Part #3-1623730-7 BCHE 4W R47 5%



TE Part #2-34151-1 PG R 22-16 COMM 22-18 MIL 5/16



TE Part #61408-1 110 FASTON REC 20-16 AWG TPBR



TE Part #926886-1 UNIV.M-N-L.PIN




TE Part #63477-2 187 FASTON REC 20-16 AWG TPBR



TE Part #160684-4 FF 110 REC 0.5-1.0MM2 TPBR



TE Part #170179-2 205 FASTON, REC., 18-14 AWG, TPBR

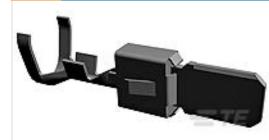

TE Part #964310-1 TAB A 5.8x0.8 CONTACT CF SWS Sn







Documents

Product Drawings

TERMINAL, PIDG R IR 10 10

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2-36161-8_AK.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2-36161-8_AK.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-36161-8_AK.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Application Specification

English

Product Environmental Compliance

TE Material Declaration

English

Agency Approvals

CSA Certificate

English