



Electrical specifications

Center Frequency: 2437 MHz
Bandwidth: $F_0 \pm 33$ MHz
VSWR: 10 dB min
Input / Output Impedance: 50 Ohms
Passband: 2404-2470 MHz
Passband Insertion Loss: 3.0 dB typ.
Passband Ripple: 1.2 dB max.
Rejection: 15 dB min. @ 2390 MHz
Rejection 2: 15 dB min. @ 2483.5 MHz
Power Handling: 3 Watt

Mechanical


Mounting Method: SMT
Dimensions: 32 x 8.2 x 6.5 mm

Environmental

Operating Temperature: -20°C to 85°C
Storage Temperature: -50°C to +90°C

This product is RoHs compliant.

Outline Drawing:

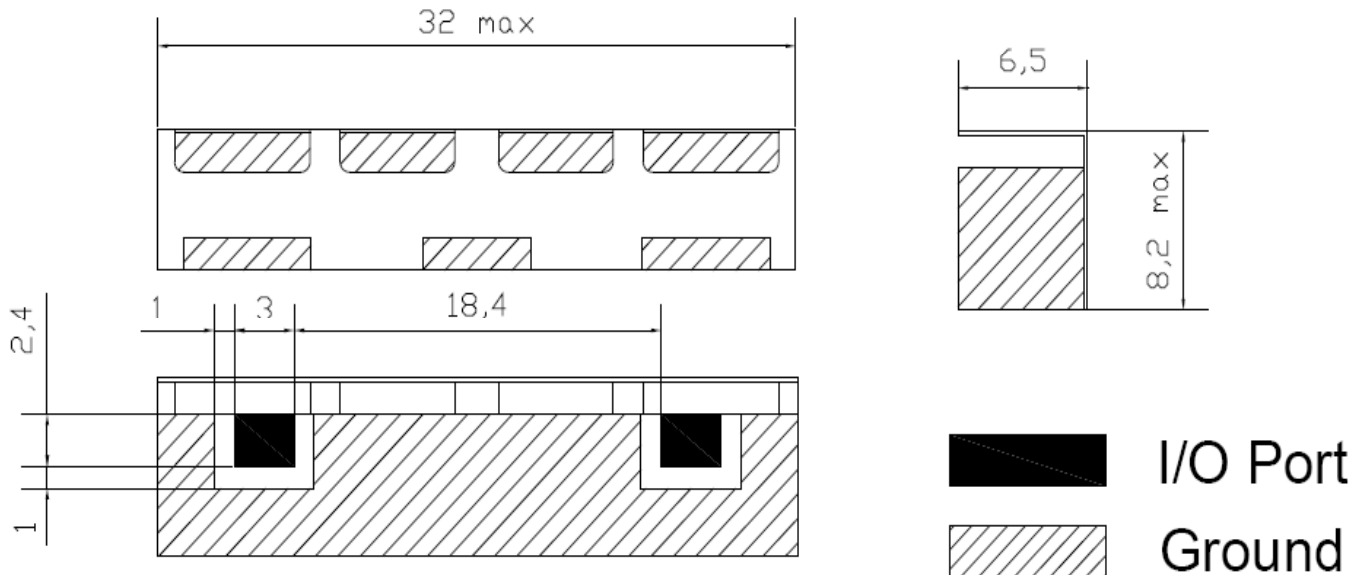

Tolerance unless
otherwise specified : ± 0.2



Response Plot:

