



# OA938AP All Metal Series



AC Fans - 115, 230V  
92mm x 38mm (3.62" x 1.50")

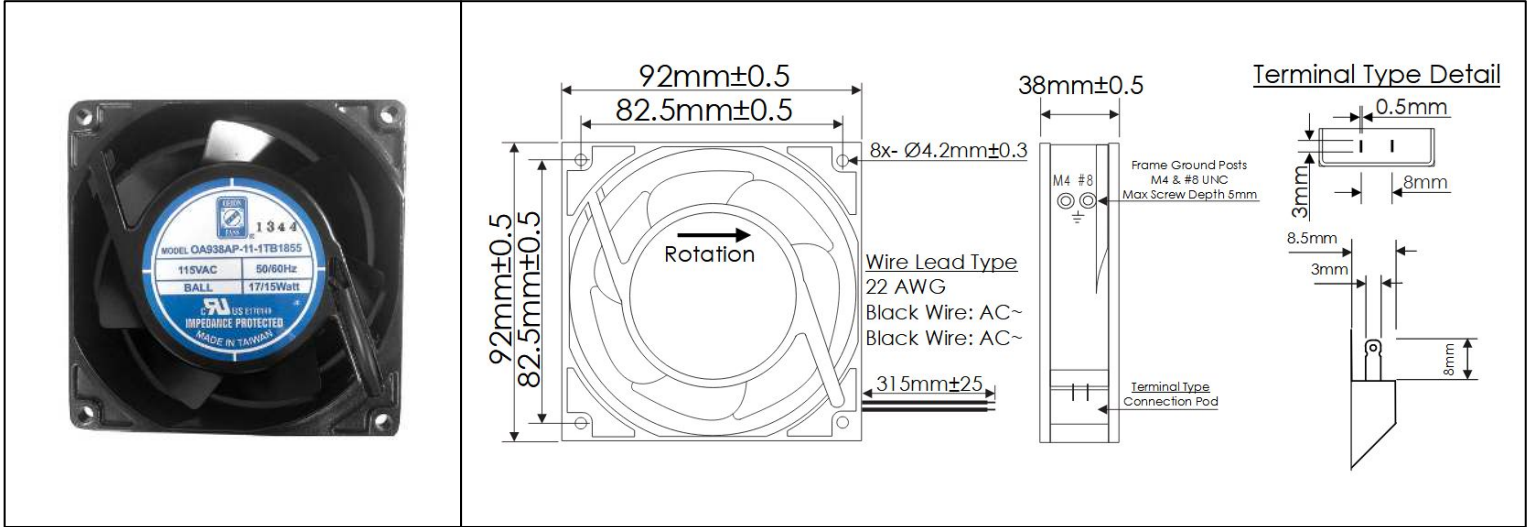

<b>Frame</b>	Die Cast Aluminum, Black Finish	<b>Operating Temperature</b> -30°C ~ +80°C  <b>Storage Temperature</b> -40°C ~ +100°C  <b>Life Expectancy</b> 50,000 Hours (L10 at 55°C)  <b>Installed Options</b> IP55 Rated Motor  Weight: 1.1 lbs
<b>Impeller</b>	Steel, Black Finish	
<b>Connection</b>	2x Wire Leads, 22 AWG, or Terminals	
<b>Motor</b>	Shaded Pole, Impedance Protected, IP55 Rated	
<b>Bearing System</b>	Ball Bearings	
<b>Dielectric Strength</b>	1500VAC/min, <1mA	
<b>Insulation Resistance</b>	≥10MΩ @ 500 VDC	

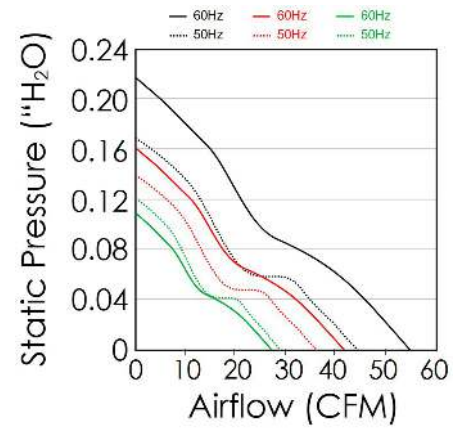

Part Number	Rated Voltage (Volts AC)	Voltage Range (Volts AC)	Frequency (Hz)	Input Power (Watts)	Rated Speed (RPM)	Max Airflow (CFM)	Noise Level (dBA)	Max Static Pressure ("H <sub>2</sub> O)
OA938AP-11-1*B1855	115	100 ~ 130	50 / 60	17 / 15	2750 / 3150	45 / 55	40.1	0.17 / 0.22
OA938AP-11-2*B1855	115	100 ~ 130	50 / 60	13 / 11	2350 / 2600	36 / 42	33.4	0.14 / 0.16
OA938AP-11-3*B1855	115	100 ~ 130	50 / 60	9 / 7	1950 / 1850	29 / 27	23.6	0.12 / 0.11
OA938AP-22-1*B1855	230	200 ~ 255	50 / 60	17 / 15	2750 / 3150	45 / 55	40.1	0.17 / 0.22
OA938AP-22-2*B1855	230	200 ~ 255	50 / 60	13 / 11	2350 / 2600	36 / 42	33.4	0.14 / 0.16
OA938AP-22-3*B1855	230	200 ~ 255	50 / 60	9 / 7	1950 / 1850	29 / 27	23.6	0.12 / 0.11

\* Substitute "T" for Terminal type connection, or "W" for Wire Lead connection.