



FEMALE INSERT
FACE VIEW



- 1 DRAIN WIRE
- 2 WHITE<DB>
- 3 YELLOW<DG>
- 4 BLUE <DA>

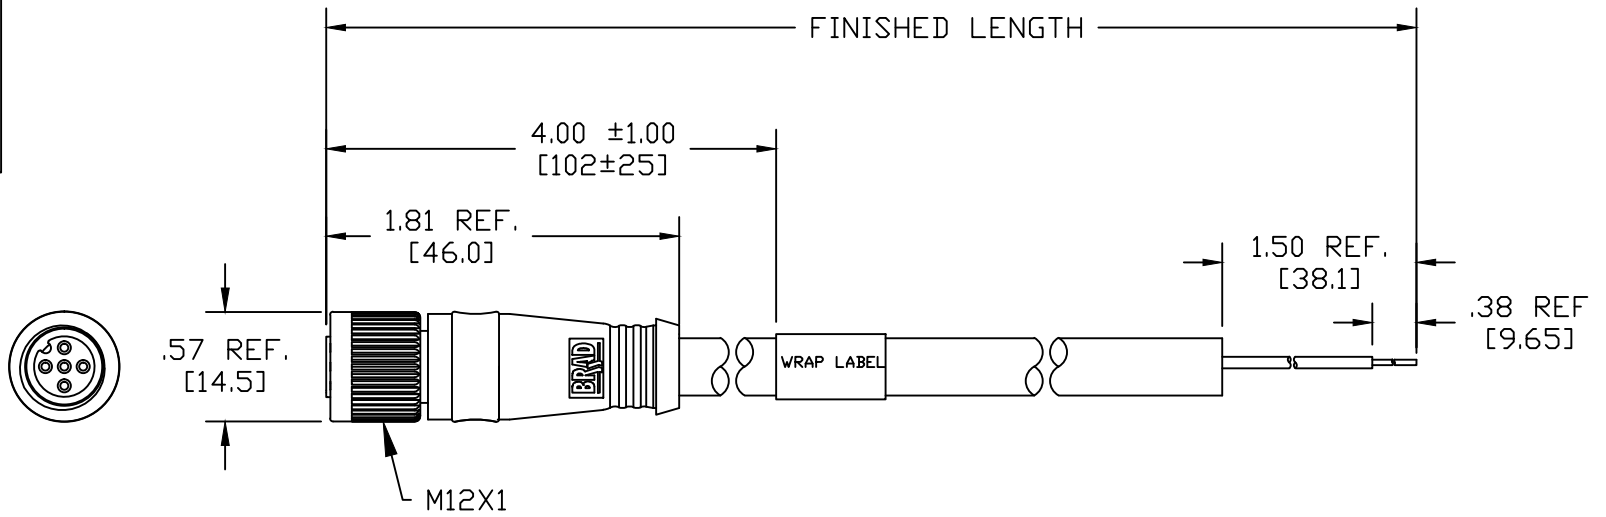

CC20A-J30-M020

Wire type
20/3C AWG Brown
PVC

cable length
M020----2 Meter
M100-----10 Meter

MECHANICAL
CONTACT: GOLD/NICKEL OVER COPPER ALLOY
INSERT : NYLON 6/6
O-RING: RED VITON
COUPLING NUT: ZINC DIECAST WITH BLACK EPOXY COATED
MOLDED BODY: GREY PVC
CABLE COLOR: BROWN
CABLE MARKING: FANC-110SBH KURAMO FA(JAPANESE WORDS)
CC-LINK Ver.1.10 KURAMO E162205-K c us AWM Style 2464
I A 80C 300V VW-1 FT1 LF

ELECTRICAL
VOLTAGE RATING: 250V AC/DC
AMPERAGE: 4A

ENVIRONMENTAL
PROTECTION: IP67 PER IEC 60529
IP68 PER SPEC PS-120001-001
OPERATION TEMP: 0°C~80°C

CABLE MARKING UPDATE EC NO: IPC2015-1192 DRWN: CAAVILES 2014/12/30 CHKD: TWOLDEGE APPR: JFMURPHY 2012/11/01	DESCRIPTION REV B	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE INCH/MM		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION		
				mm	INCH	DRAWN BY TWOLDEGE	DATE 2012/09/25	TITLE CC-LINK MICRO CHANGE 4-POLE FEMALE STRAIGHT 20/3C SHLDED BROWN PVC			
			4 PLACES	±---	±---	CHECKED BY VOU	DATE ---				
			3 PLACES	±---	±.005	APPROVED BY JFMURPHY		DATE 2012/11/01	MOLEX INCORPORATED DOCUMENT NO. SD-130257-002 SHEET NO. 1 OF 1		
2 PLACES	±.13	±.010	MATERIAL NO.								
1 PLACE	±.25	±.020	ANGULAR ± 5°		SIZE A		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS											