


PROPRIETARY INFORMATION:
 PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION		DATE	APPROVED
REV	DESCRIPTION		
A	INITIAL RELEASE, RFS. 25368, EM	12/30/13	HM
B	UPDATE APPROVALS, RFS. 27368, BS	06/07/19	MK

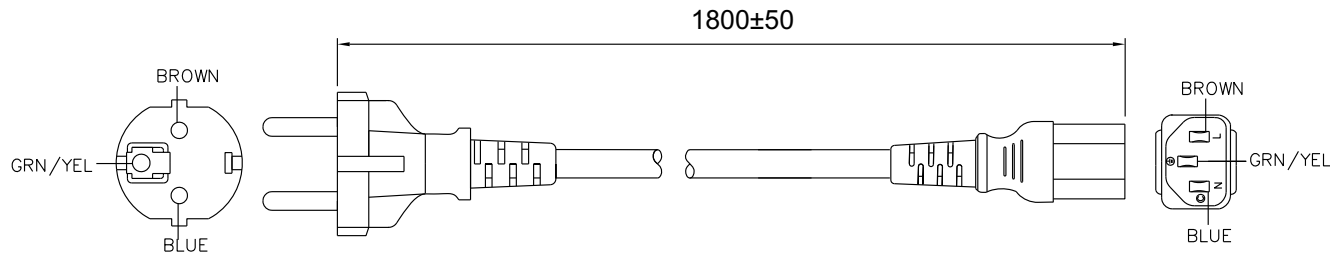


GENERAL SPECIFICATIONS:

- RATING: 10A / 250V AC
- CABLE TYPE / SIZE: H05VV-F, 3 x 1.0 mm²
- TEMPERATURE RATING: 70° C
- CONDUCTOR COLORS: BROWN / BLUE/ GREEN-YELLOW
- CABLE JACKET COLOR: BLACK
- OVERALL LENGTH (L): 1800 ± 50 mm
- CABLE OUTER DIAMETER: 7.1 ± 0.2 mm
- END 'A' PLUG; CEE 7/7
- END 'B' IEC 320 / C13
- APPROVALS PLUG: (VDE, N, S, D, FI, KEMA, UTE, CEBC, OVE, IMQ) or (ENEC-VDE)
- APPROVALS CABLE: VDE, N, S, D, FI, KEMA, SEV, CEBC, OVE
- APPROVALS CONNECTOR: ENEC-VDE

PACKING:

HANKING

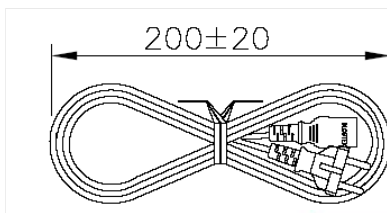

NOTES:

1. CORD, PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).



2. PLUG AND CONNECTOR ARE BOTH ON THE SAME SIDE OF THE HANK.

3. SPAIN APPROVALS MARK IS NOT SHOWN ON THE PLUG OR CONNECTOR, BUT IT'S COVERED UNDER MARK.

RELEASED
 By pudxc at 4:29 pm, Jun 07, 2019

Customer Approval of Specification:
 Please approve, sign and send back to GlobTek so we can complete order processing. A delay in receipt of this form will delay delivery schedule.

Company Name:
 Customer P/N:
 Quote Number:
 Date:
 Auth. Rep. Name:
 Auth. Rep. Signature:

DASH NO.	PART NO	REV.	DESCRIPTION	NOTES
TABULATION BLOCK				
			GlobTek, Inc. www.globtek.com 186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111	
				DWG TITLE: EUROPEAN POWER CORD
INIT.BY: EM	DATE: 12/30/13	TOLERANCES: DECIMALS ANGULAR .xx +/- 0.1 +/- 1° .xxx +/- .005		
DRAWN: NF	DATE: 12/30/13	MILLIMETERS ANGULAR .xx +/- 0.3 +/- 1° .xxx +/- .013		
APRVD: BS	DATE: 12/30/13	FSCN No.: G, CC	SIZE: A	REV. B
		SCALE: NONE	PART NO: 23144271M8701(R)	SHEET 1/1

Foot Note:
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

Limitation of Use:
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice