

т	۵	<b>п</b>	m	0



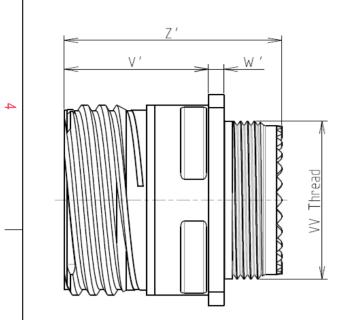



LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

BASIC SERIES:

SHELL SIZE : 11

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite			
-Shell Plating	: Olive drab Cadmium			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	: -65°C to +175°C			
-Salt Spray	: 2000 hours			

: 10.4 g ± 10%

8D 0

G

11

J

01

А

F

Ν


Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
РР	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V'	19.5+1.4/-0		
W'	2.1/3.65		
Z'	32 Max		
VV THREAD	M15x1-6g		


ORIENTATION : N

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 11-01



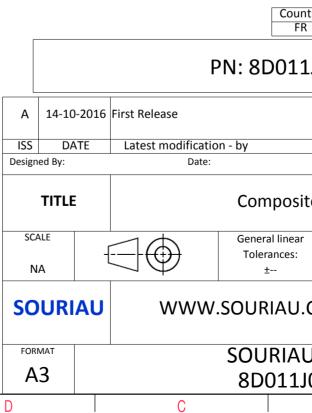

σ		Þ			
				4	
				3	
S EXAMPLE					
any non-conformi which does not co of the Parties or l adation, technical n	mply with by a third part	у			
Intry Jurisc R	diction & Cont Not Listed	rol List		2	
1J01AN	J01AN				
			MOD N°		
	CUSTOMER	RDRAWING		-	
ite Receptac	e Receptacle 8D series				
ar	NPRDS / PROJECT 859				
I.COM	This document is the property of				
U DRG N°	1		SHEET		
J01AN-C		A	1/2	J	
_	·				

		G	г П	m	D	0
		Contact Layout				Panel Cutout
4		01				SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
		1#12 11-01	]		¥ 	
ယ	Ctc A	X Y 0 0	]			Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of (professional recommendati
2						Country FR PN: 8D011J
	-				A 14-10-202 ISS DATE Designed By:	16 First Release Latest modification - by Date:
-					TITLE SCALE NA	General linear Tolerances:
					FORMAT A3	SOURIAU
	Н	G	F	E	D	8D011J0 C

