
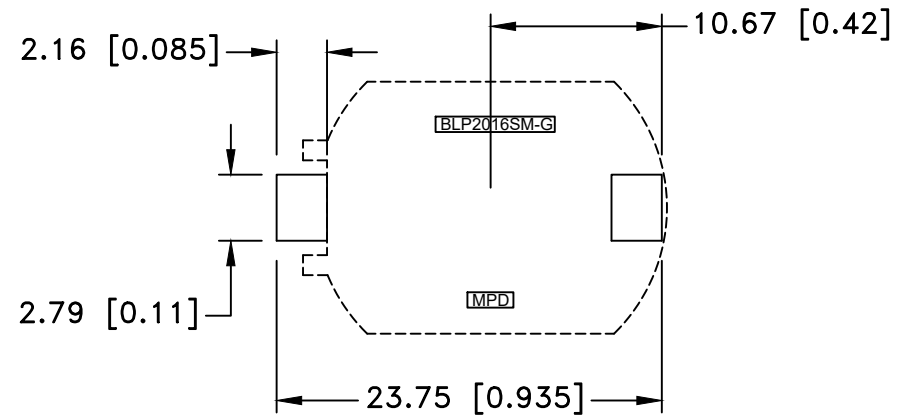


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
06/21/13	A	Updated PBC Layout	T.B.	B.S.	
11/07/19	B	Added weight of the part	T.B.	B.S.	

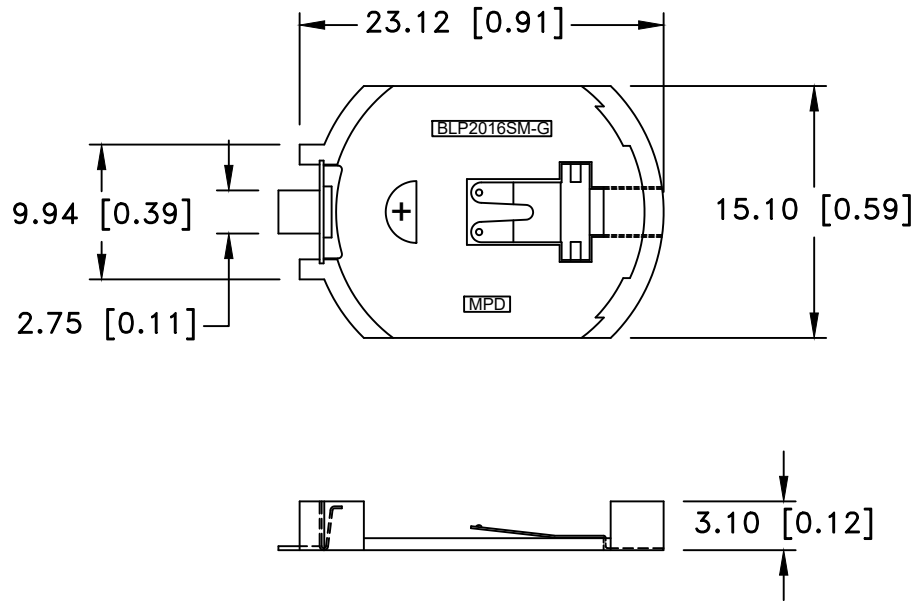

PCB LAYOUT


SPECIFICATIONS:

- * Holder material- 30% glass reinforced Liquid Crystal Polymer resin, UL File No. E123598, UL94V-0
- * Color: White
- * Contacts : 0.020" thick Stainless steel 301, 3/4 hard , GOLD FLASH over nickel
- * Temperature range: -40°C to +280°C

Vibration Test: 10-50-10 Hz swept in 60 seconds
 X,Y,Z direction: 1 hour each direction, No dislodgement of the cell or damage, No discontinuity over 10 micro-seconds

Shock Test: Half sine wave acceleration 150g. 6 micro-seconds, 3 shock pulses each direction per axis, total of 18 pulses, No evidence of physical damage

Approximate weight: 0.57g
 ROHS COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
	decimal ±.5 (.020)	Scale	Drawn By B.S. Approved By T.B.
Fractional ± .8 (.030)	Title SURFACE MOUNT BATTERY HOLDER FOR CR2016		
Angular ± 3°	Date 11/07/19	Drawing Number BLP2016SM-G	