Email:sales@dlcdisplay.com

CUSTOMER P/N:

Rev.	DATE	NOTES
V1.0	2019.04.19	New issue
V1.1	2019.09.17	Modify dimension

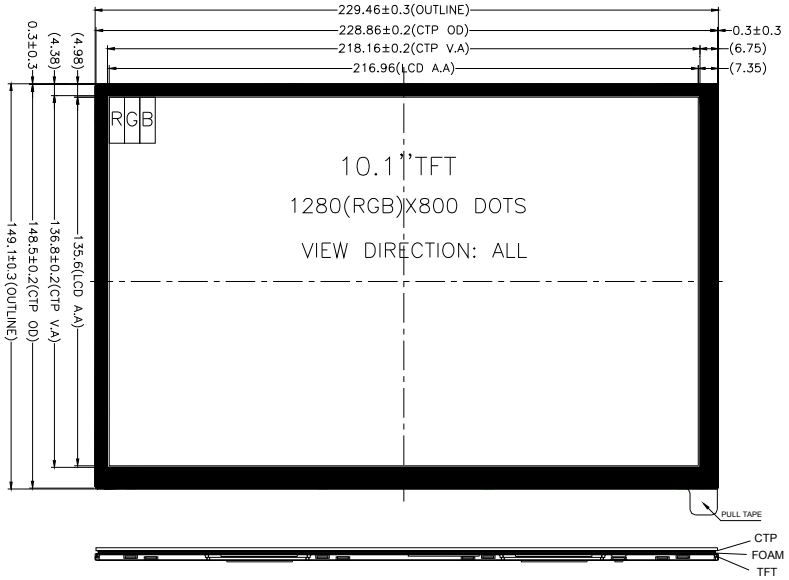

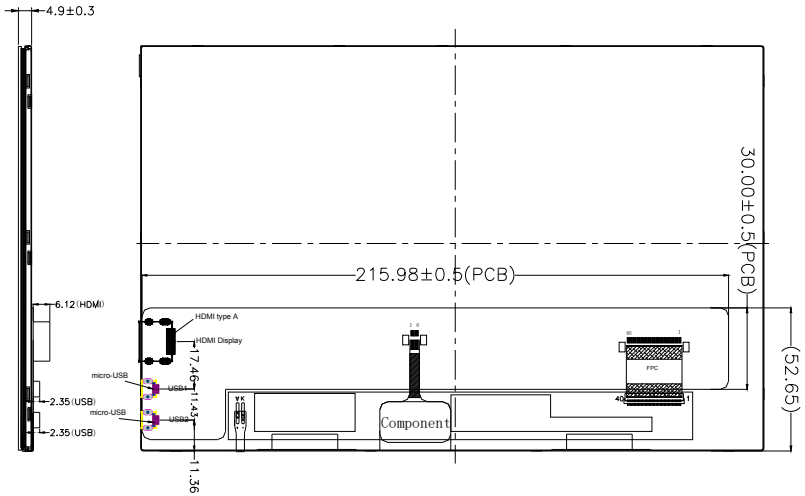

Application Note:

1. The USB1 port is for the TOUCH and the power supply for the other circuits except backlight.

2. he USB2 port is the power supply for the backlight unit only.

USB1(for touch)

PIN	Symbol
1	VBUS(5V)
2	USB D-
3	USB D+
4	NC
5	GND

USB2(for backlight power)

PIN	Symbol
1	VBUS(5V)
2	NC
3	NC
4	NC
5	GND

HDMI INTERFACE

PIN	Symbol
1	TMDS Data2+
2	TMDS Data2 Shield
3	TMDS Data2-
4	TMDS Data1+
5	TMDS Data1 Shield
6	TMDS Data1-
7	TMDS Data0+
8	TMDS Data0 Shield
9	TMDS Data0-
10	TMDS Clock+
11	TMDS Clock Shield
12	TMDS Clock-
13	CEC
14	Reserved
15	SCL
16	SDA
17	DDC/CEC Ground
18	+5V Power
19	Hot Plug Detect

NOTES:
1.DISPLAY TYPE: 10.1" TFT
2.DISPLAY MODE: TM with Normally Black
3.VIEW DIRECTION: ALL
4.OPERATION TEMPERATURE: −10°C~+60°C
STORAGE TEMPERATURE: −20°C~+70°C
5.GENERAL TOLERANCE: ±0.2
6.MODULE INTERFACE: LCD: HDMI CTP: USB
7.REQUIREMENT ON ENVIRONMENT PROTECTION: ROHS

Customer Approval	Drawn:	
	Checked:	
	Approved:	
	Critical Dim.	
	Reference Dim.	( )

DLC Display Co., Ltd

Title	TFT LCM OUTLINE	Unit	mm
Part No.	DLC1010BBP30HF-C-1	Scale	1:1
Revison	V1.1	Page	1/1
Date	2019-09-17	3rd Angle	

Outline Drawing

DLC Display Co.,Limited

MODEL No:DLC1010BBP30HF-C-1