


SHEET 2 OF 2
NUMBER 480712

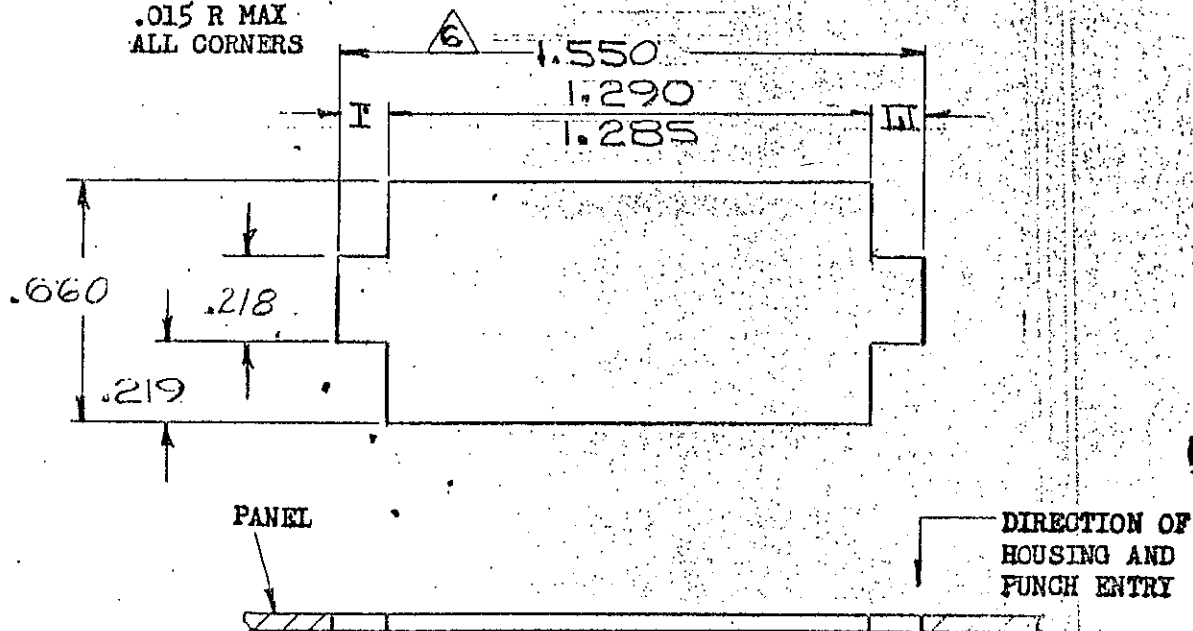

- NOTE: 1. Recommended panel thickness .025 - .065.
2. Both locking legs to be squeezed together and housing to be inserted straight-in, as opposed to a rocking manner of insertion.
3. The panel must be punched so that the housing enters the panel in the same direction as the punch.
4. Dimensions I and II to be equal within .005.
5. Panel must not have any material (paint, porcelain, etc.) applied in the mounting hole area that would decrease retention of the housing in the panel.
6. IF NOTES 3 AND/OR 5 ARE NOT COMPLIED WITH, THE 1.550 DIMENSION SHOULD BE REDUCED TO 1.530 TO ASSURE PROPER HOUSING RETENTION IN THE PANEL.

DIMENSIONS IN INCHES. DO NOT SCALE PRINT

©1973 BY AMP, INCORPORATED. ALL RIGHTS RESERVED. AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING

**CUSTOMER COPY
REFERENCE ONLY**

MATERIAL AND FINISH



AMP INCORPORATED
HARRISBURG, PENNA.

CLASS

WIRE — RANGE — INSULATION

TYPE

TOLERANCE EXCEPT AS NOTED
± .005 ± .005

SCALE
NTS

LOC
CM

NO SHEET 2 OF 2
480712

REV
F

LTR REVISION RECORD ECN DR/CHK DATE

DR *L.H. [unclear]* DE *J. Kumbler* 3-21-79

CHK *[unclear]* APP *J. Kumbler* 3-21-79

NAME RECOMMENDED MOUNTING INFORMATION
15 CIRCUIT MATE-N-LOK PANEL MOUNT PLUG

PRINT DIST
53