


USB - C (USB 3.1 Gen 2, Superspeed+) adapter board

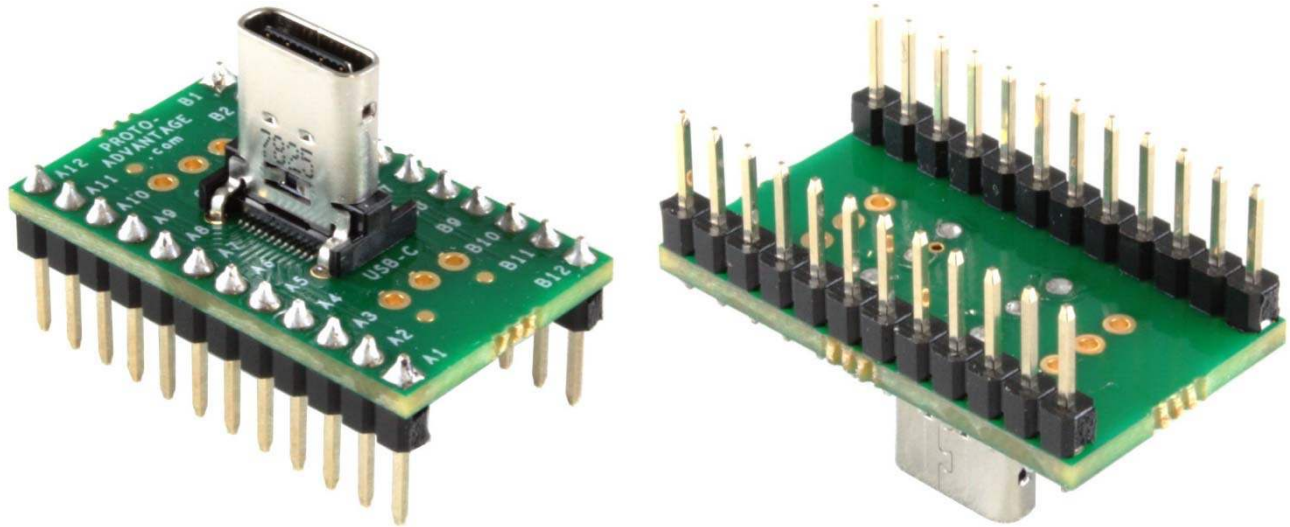

Product Highlights

This adapter comes fully assembled with connector and pins installed.

Specifications

| | |
|--|--|
| PCB dimensions: | 1.2" x 0.7" x 0.063" (30.48mm x 17.78mm x 1.6mm) |
| PCB construction: | FR-4 UL94V-0 |
| PCB operating temperature range (without connector): | -40°C to +130°C |
| PCB reflow maximum temperature (without connector): | +260°C |
| PCB assembly standard: | IPC-A-610 Class II |