


Customer Information Sheet

DRAWING No.: Z125-922 IF IN DOUBT - ASK NOT TO SCALE THIRD ANGLE PROJECTION ALL DIMENSIONS IN mm

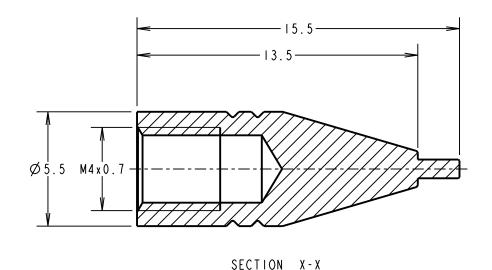





NOTES:

- I. TIP IS SUITABLE FOR USE WITH INSERTION AND WITHDRAWAL TOOL Z125-902.
- 2. FOR USE WITH G125-0010005 FEMALE CRIMP CONTACTS.
- 3. SEE TOOLING INSTRUCTION SHEET IS-38 FOR INSERTION AND WITHDRAWAL INSTRUCTIONS.

RTP	4	14.01.21	30342
NAME	188.	DATE	CN/CO
APPROVED: R.PORTLOCK			
CHECKED:		M.RUDKIN	
DRAWN:		R.PORTLOCK	
CUSTOMER REF.:			
ASSEMBLY DRG:			

www.harwin.com technical@harwin.com

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT

THEIR WRITTEN PERMISSION

TOLERANCES $X. = \pm 1 mm$

 $X.X = \pm 0.50 mm$ $X.XX = \pm 0.20$ mm $X.XXX = \pm 0.01$ mm

ANGLES = ±5° UNLESS STATED MATERIAL:

STAINLESS STEEL

FINISH:

S/AREA:

CLEAN

TITLE:

mm²

REMOVAL TIP FOR FEMALE G125 CRIMP CONTACTS

DRAWING NUMBER:

7125-922

SHT ² OF ₂