



TAOGLAS®



Datasheet

Hercules 2-in-1

Part No:

MA520.A.BC.008

Description:

Hercules 2-in-1 Cellular and Wi-Fi Permanent Mount with 2m of RG-316 with SMA(M) for Cellular and RP-SMA(M) Wi-Fi

Features:

- Cellular 4G/3G/2G
- Dual Band Wi-Fi 2.4 GHz / 5.8 GHz
- Low Profile and Vandal Proof
- IP65 Rated Enclosure
- Heavy Duty Permanent Mount
- Cellular: 2m RG-316 SMA(M)
- Wi-Fi: 2m RG-316 RP-SMA(M)
- RoHS & REACH Compliant

1. Introduction	3
2. Specifications	5
3. Antenna Characteristics	6
4. Radiation Patterns	11
5. Mechanical Drawing	25
6. Packaging	26
7. Installation Guidelines	27
8. Application Note	28
<hr/>	
Changelog	31

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.



1. Introduction



The MA520 Hercules 2-in-1 Cellular and 2.4/5.8GHz Antenna is the smallest package high performance screw-mount (permanent mount) antenna available, for external use on vehicles and outdoor assets worldwide. Everything is in the one housing reducing the need for multiples antenna installations. This is the ideal antenna for 3G gateway routers that provide Wi-Fi hotspots.

Typical Applications Include:

- Smart Metering
- Routers and Gateways
- Connected Enterprise

It has been designed for heavy duty work with extra thick threads; with durable UV-resistant, IP65 rated enclosure, ABS housing is resistant to vandalism and direct attack. At only 29mm high and 49mm in diameter this antenna enables covert operation and its quality is proven by growing adoption by many of the world's largest wireless brands. The standard cable length is 2 meters. The Hercules MA520's exceptional design means it can work equally well mounted on or without ground-plane.

The cables and connectors are fully customizable, for further information please contact your regional Taoglas customer support team.


2. Specifications

Cellular Electrical									
Band	Frequency (MHz)		Efficiency (%)	Average Gain (dB)	Peak Gain (dBi)	Max Input Power	Impedance	Polarization	Radiation Pattern
5G NR/4G Band 5,8,18,19,20,26,27,28, 29	700~960	Free space	37.4	-4.3	0	10W	50 Ω	Linear	Omni
		30*30cm Ground Plane	32.2	-4.9	0.7				
4G/3G Band 1,2,3,4,9,23,25,35,39,66	1710~2200	Free space	32	-4.9	0.9				
		30*30cm Ground Plane	30.9	-5.1	2.4				
4G/3G Band 7,38,41	2490~2690	Free space	7.9	-11	-4.2				
		30*30cm Ground Plane	10.3	-9.9	-2.9				
5G NR/4G Band 22,42,43,48,77,78,79	3300~3800	Free space	9.1	-10.4	-2.2				
		30*30cm Ground Plane	15.2	-8.2	-0.3				
LTE5200/ Wi-Fi 5800	5150~5925	Free space	13.6	-8.7	1.7				
		30*30cm Ground Plane	21.2	-6.7	1.1				
Wi-Fi Electrical									
Band	Frequency (MHz)		Efficiency (%)	Peak Gain (dBi)	Max Power Input	Impedance	Polarization	Radiation Pattern	
2.4GHz Wi-Fi	2400~2500		25	2.1	10W	50 Ω	Linear	Omni	
5.8GHz Wi-Fi	5150~5850		20	-3.2					
Mechanical									
Dimensions		29*Ø49mm							
Cable		2m RG-316							
Connector		Cellular: SMA(M) Straight Wi-Fi: Reverse Polarity SMA(M) Straight							
Thread Diameter		18mm							
Casing		UV Resistant ABS							
Weatherproof Gasket		CR4305 Foam with 3M9448B Double sided adhesive							
Sealant		Rubber Stopper							
Base Thread		Nickel Plated							
Environmental									
Corrosion		5% NaCl for 96hrs							
Temperature Range		-40°C to +85°C							
Thermal Shock		100 cycles -40°C to +85°C							
Humidity		Non-condensing 65°C 95% RH							
Shock (Drop Test)		1m drop on concrete 6 axes							
RoHS & REACH Compliant		Yes							
Ingress Protection		IP65							



5G/4G Bands			
Band Number	5G NR / FR1 / LTE / LTE-Advanced / WCDMA / HSPA / HSPA+ / TD-SCDMA		
	Uplink	Downlink	Covered
1	UL: 1920 to 1980	DL: 2110 to 2170	✓
2	UL: 1850 to 1910	DL: 1930 to 1990	✓
3	UL: 1710 to 1785	DL: 1805 to 1880	✓
4	UL: 1710 to 1755	DL: 2110 to 2155	✓
5	UL: 824 to 849	DL: 869 to 894	✓
7	UL: 2500 to 2570	DL: 2620 to 2690	✓
8	UL: 880 to 915	DL: 925 to 960	✓
9	UL: 1749.9 to 1784.9	DL: 1844.9 to 1879.9	✓
11	UL: 1427.9 to 1447.9	DL: 1475.9 to 1495.9	✗
12	UL: 699 to 716	DL: 729 to 746	✗
13	UL: 777 to 787	DL: 746 to 756	✗
14	UL: 788 to 798	DL: 758 to 768	✓
17	UL: 704 to 716	DL: 734 to 746	✗
18	UL: 815 to 830	DL: 860 to 875	✓
19	UL: 830 to 845	DL: 875 to 890	✓
20	UL: 832 to 862	DL: 791 to 821	✓
21	UL: 1447.9 to 1462.9	DL: 1495.9 to 1510.9	✗
22	UL: 3410 to 3490	DL: 3510 to 3590	✓
23	UL: 2000 to 2020	DL: 2180 to 2200	✓
24	UL: 1625.5 to 1660.5	DL: 1525 to 1559	✓
25	UL: 1850 to 1915	DL: 1930 to 1995	✓
26	UL: 814 to 849	DL: 859 to 894	✓
27	UL: 807 to 824	DL: 852 to 869	✓
28	UL: 703 to 748	DL: 758 to 803	✓
29	UL: -	DL: 717 to 728	✗
30	UL: 2305 to 2315	DL: 2350 to 2360	✗
31	UL: 452.5 to 457.5	DL: 462.5 to 467.5	✗
32	UL: -	DL: 1452 – 1496	✗
35		1850 to 1910	✓
38		2570 to 2620	✓
39		1880 to 1920	✓
40		2300 to 2400	✗
41		2496 to 2690	✓
42		3400 to 3600	✓
43		3600 to 3800	✓
48		3550 to 3700	✓
66	UL: 1710-1780	DL: 2110-2200	✓
71		617 to 698	✗
74/75/76		1427 to 1518	✗
77		3300 to 4200	✓
78		3300 to 3800	✓
79		4400 to 5000	✓

3. Antenna Characteristics


3.1 Test Setup – 30*30cm Ground Plane

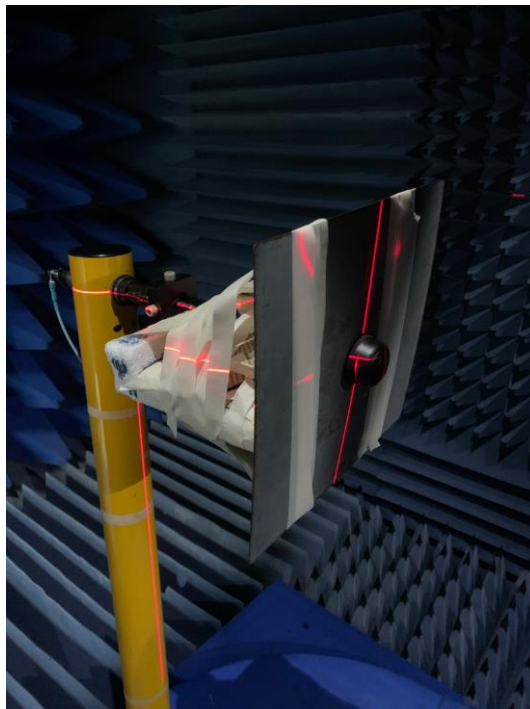


3.2 Return Loss – Cellular

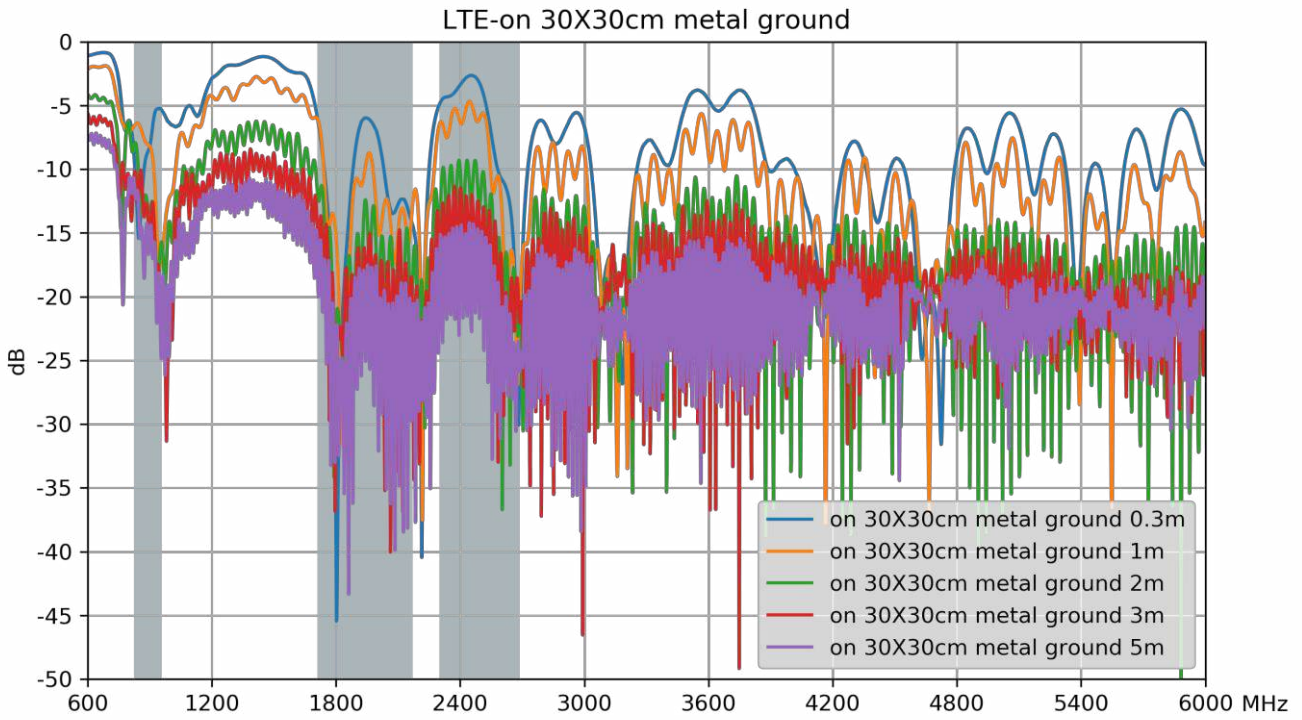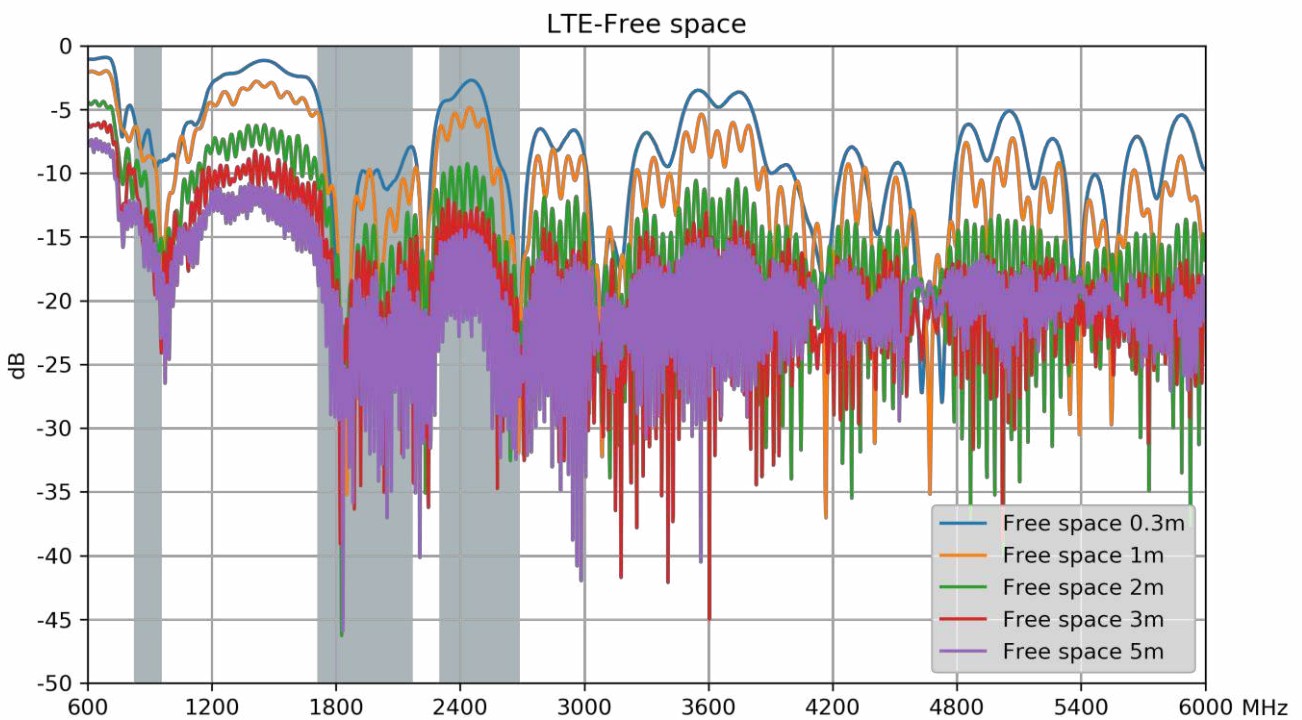


3.3 Efficiency – Cellular

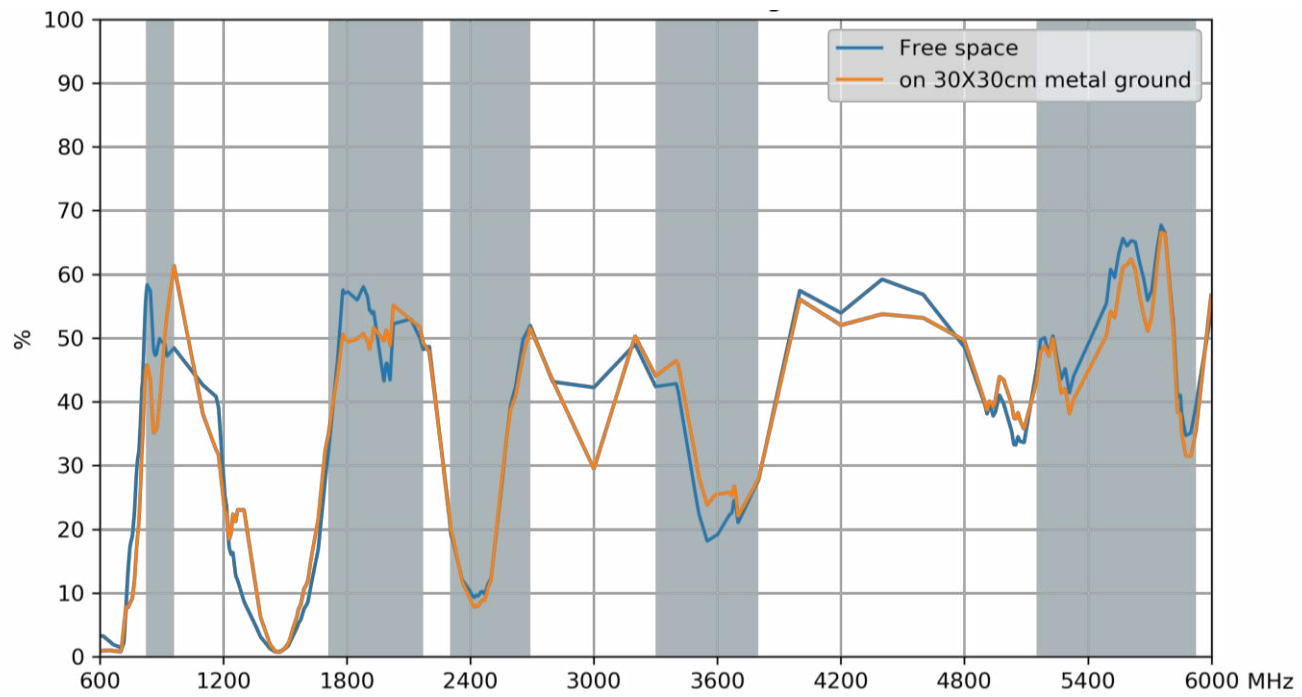


3.4 Average Gain – Cellular

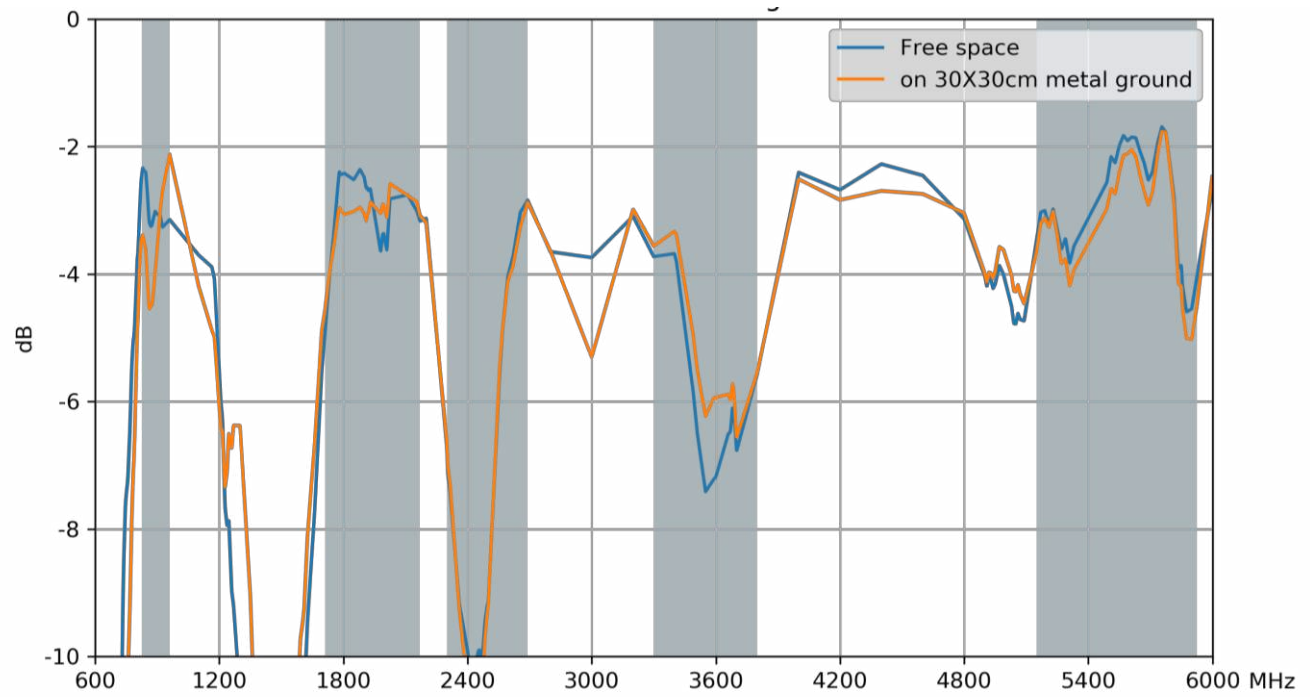


3.5 Peak Gain – Cellular

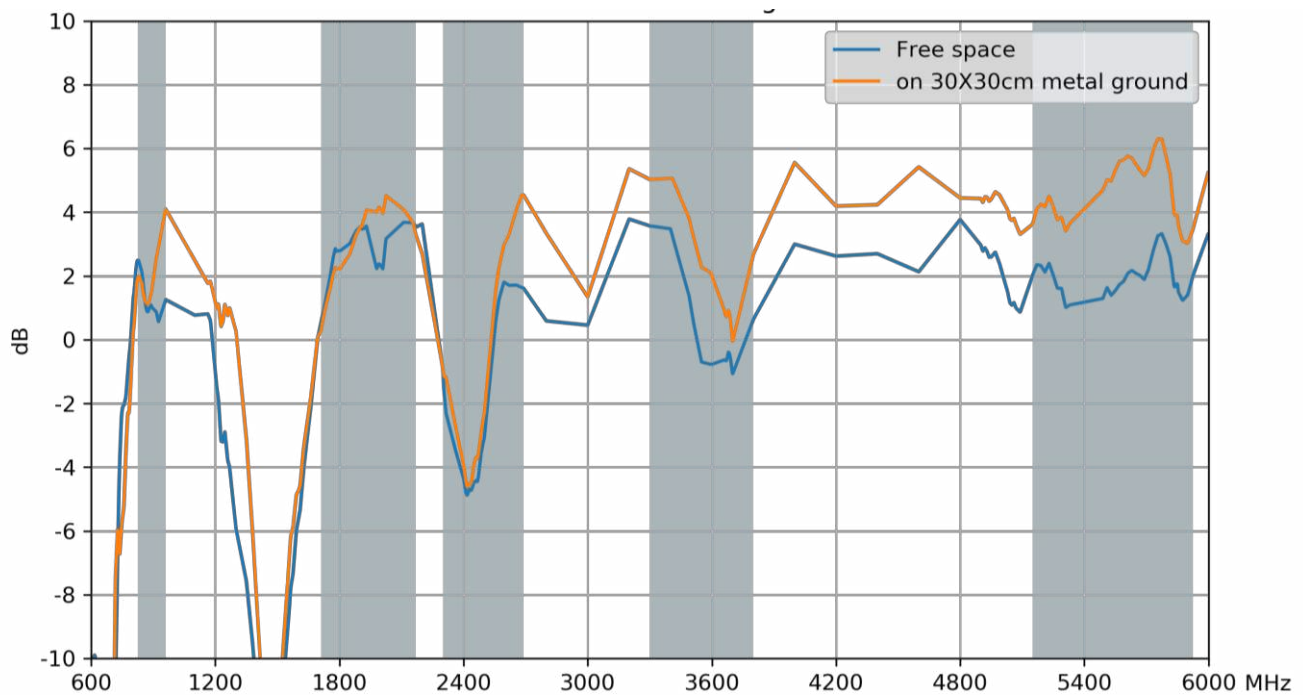

3.6 Return Loss – Wi-Fi

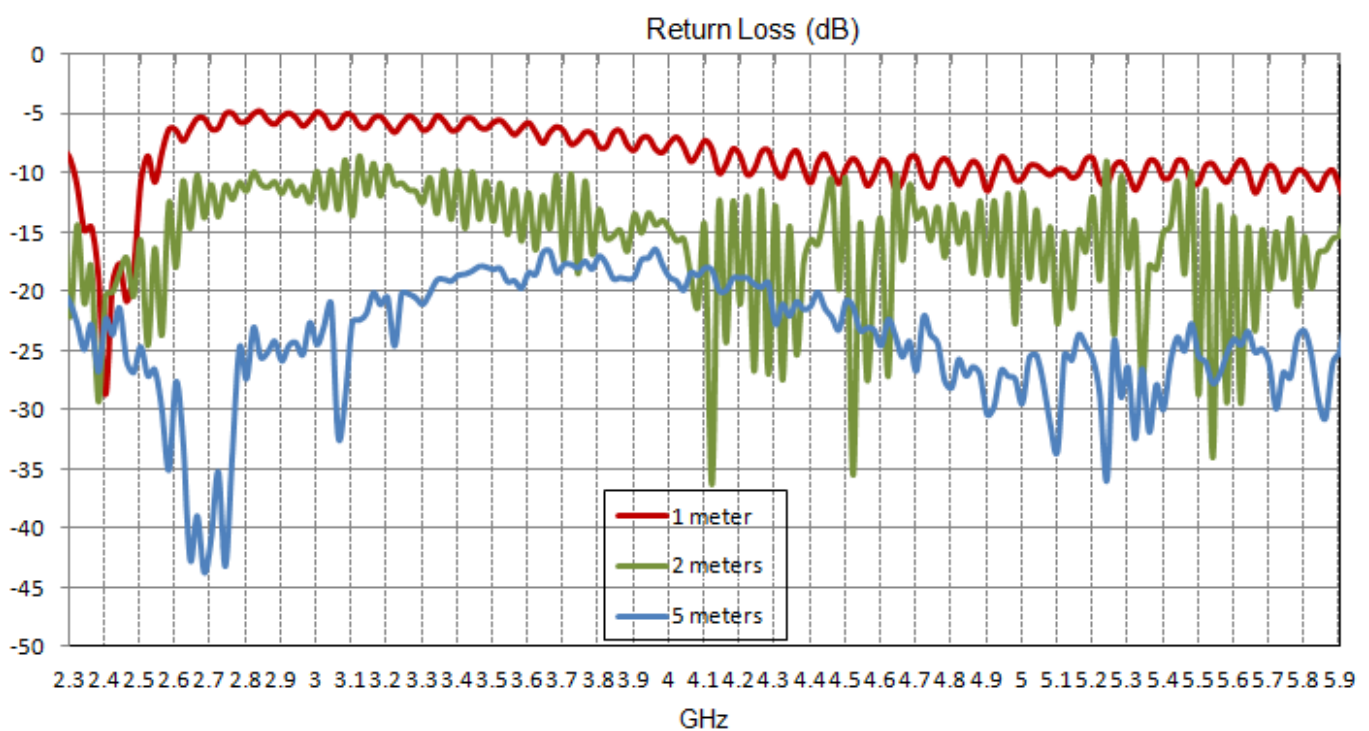


3.7 Efficiency – Wi-Fi

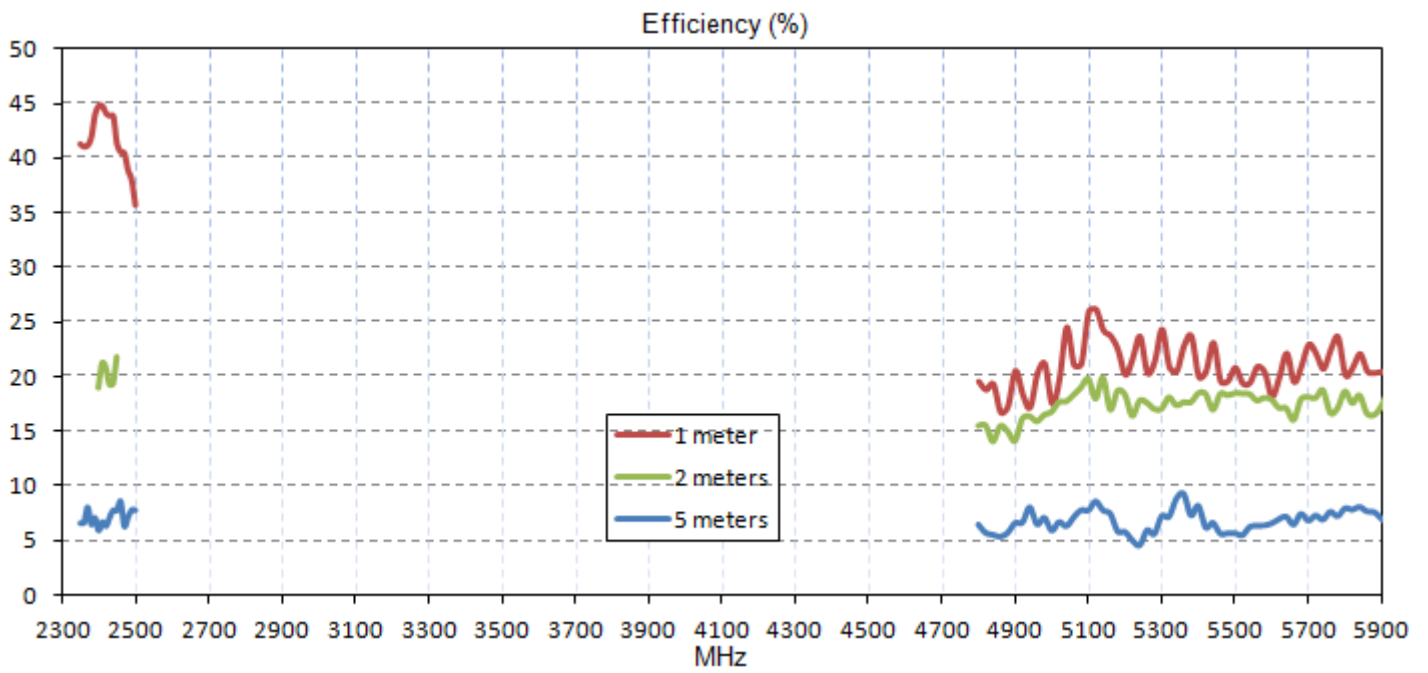


4. Radiation Patterns


4.1 890MHz 3D and 2D Radiation Patterns – Free Space

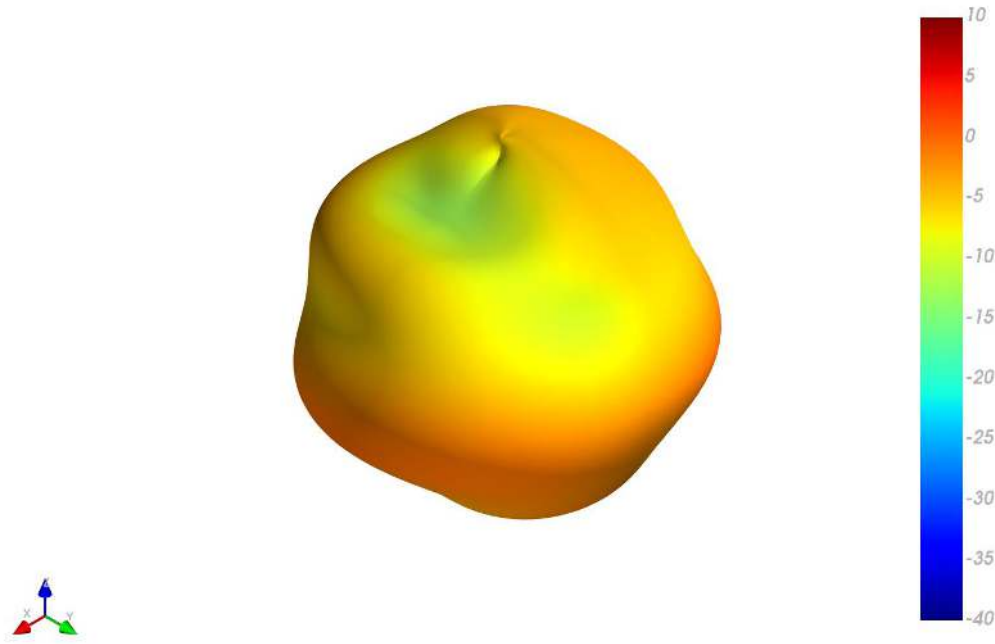


XY Plane

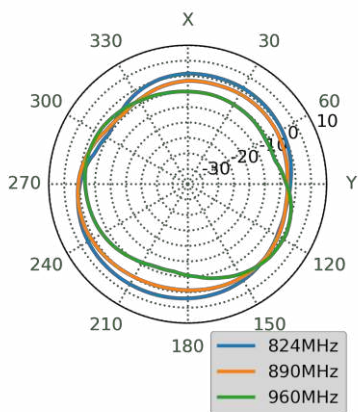


XZ Plane

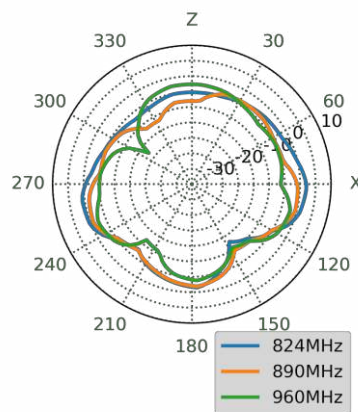




YZ Plane

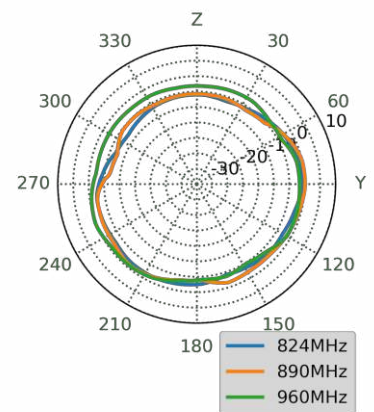


4.2 1805MHz 3D and 2D Radiation Patterns – Free Space

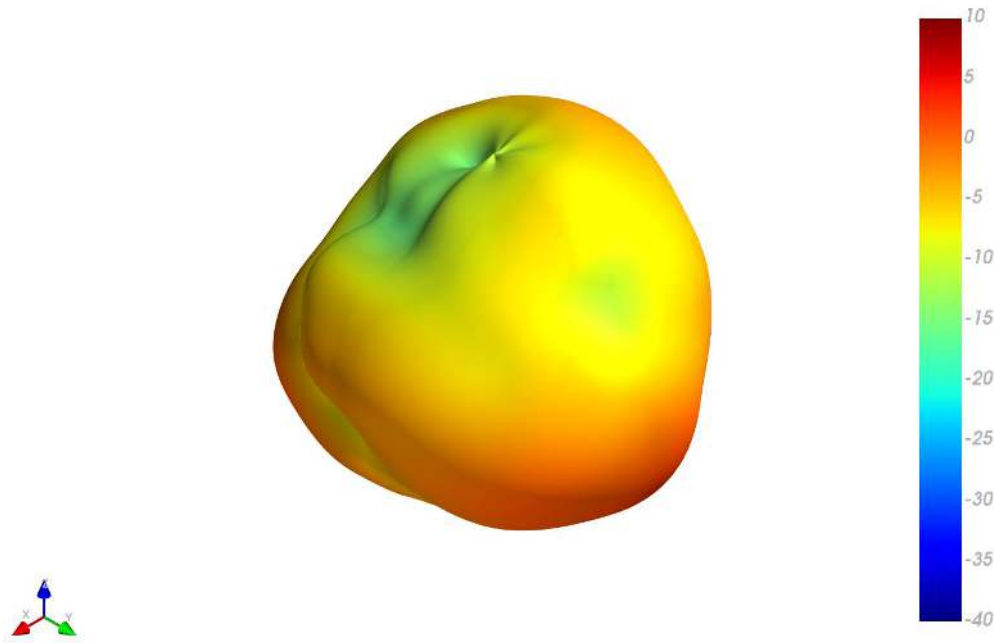




XY Plane XZ Plane YZ Plane

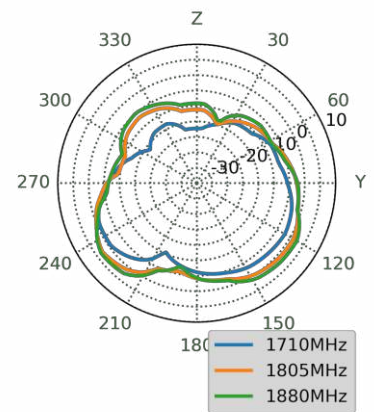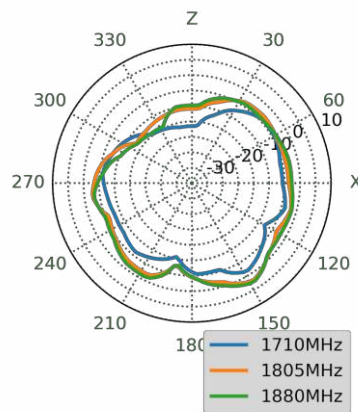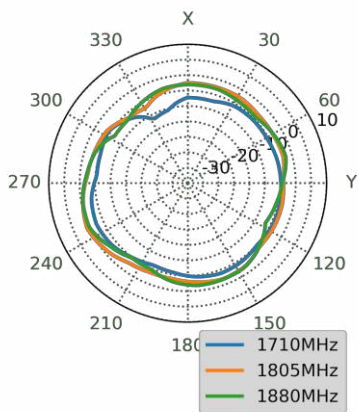



4.3 1920MHz 3D and 2D Radiation Patterns – Free Space

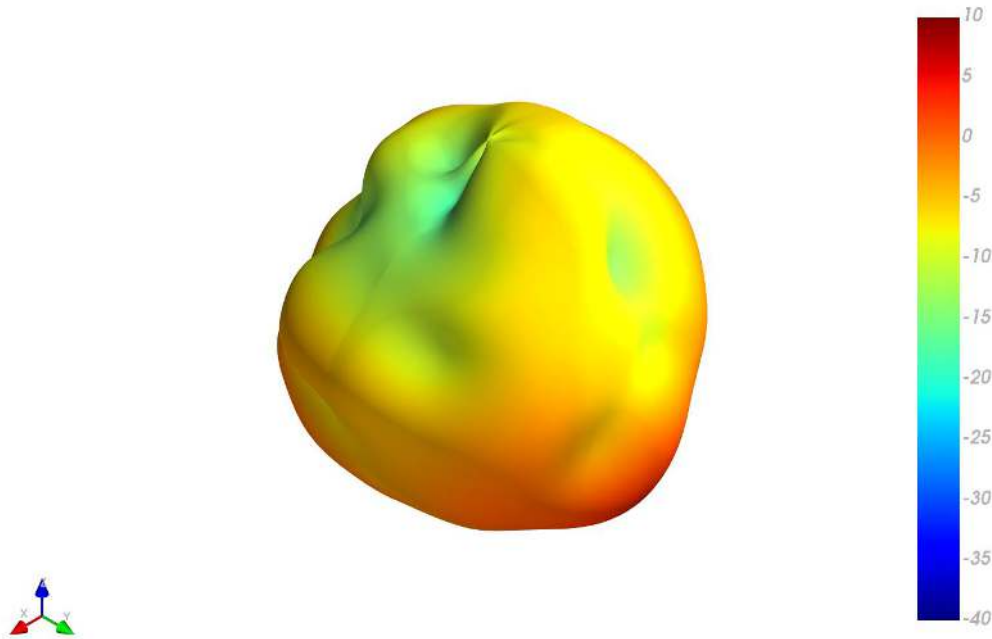


XY Plane XZ Plane YZ Plane

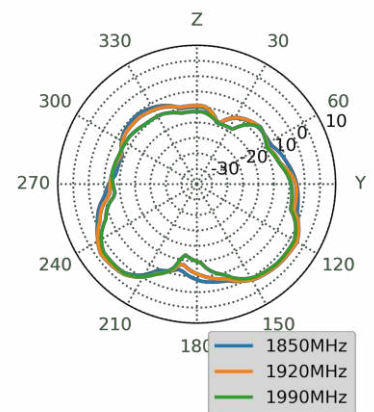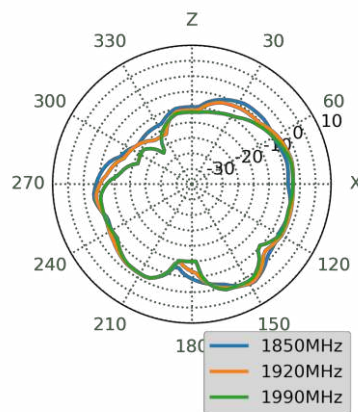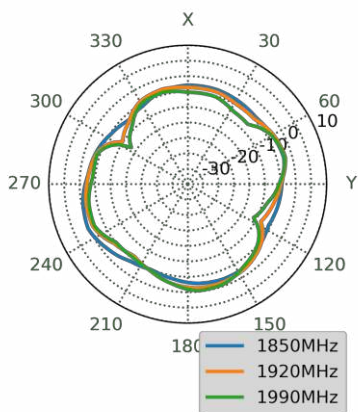




4.4 1990MHz 3D and 2D Radiation Patterns – Free Space

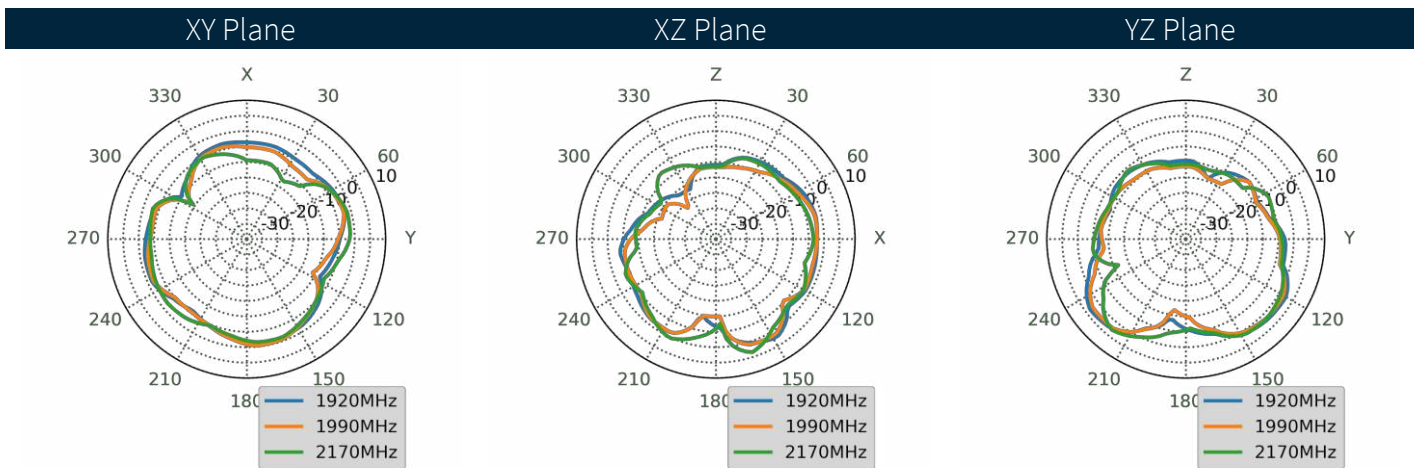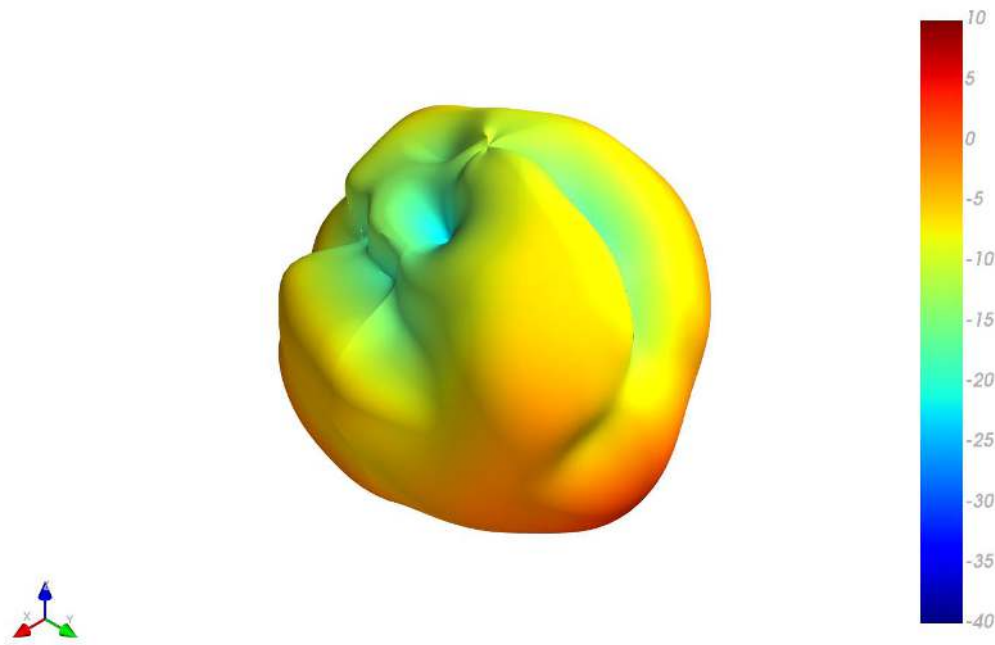



4.5 2595MHz 3D and 2D Radiation Patterns – Free Space

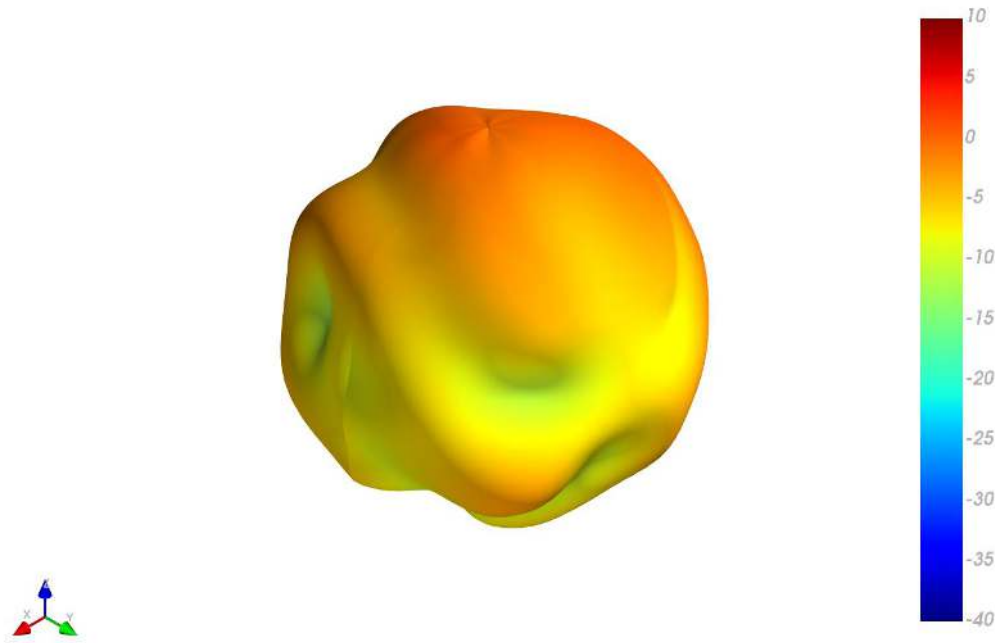


XY Plane XZ Plane YZ Plane

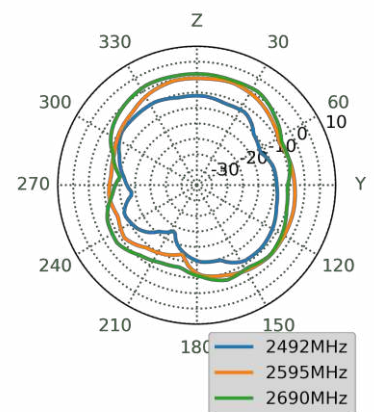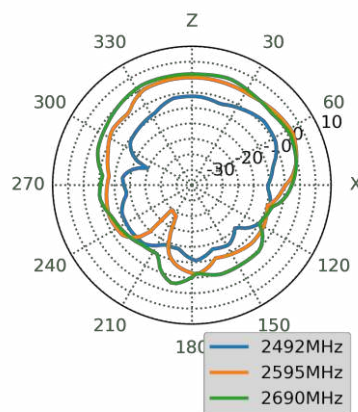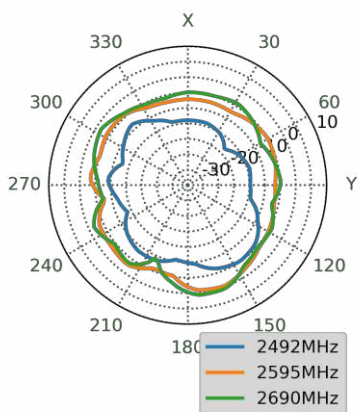




4.6 3550MHz 3D and 2D Radiation Patterns – Free Space

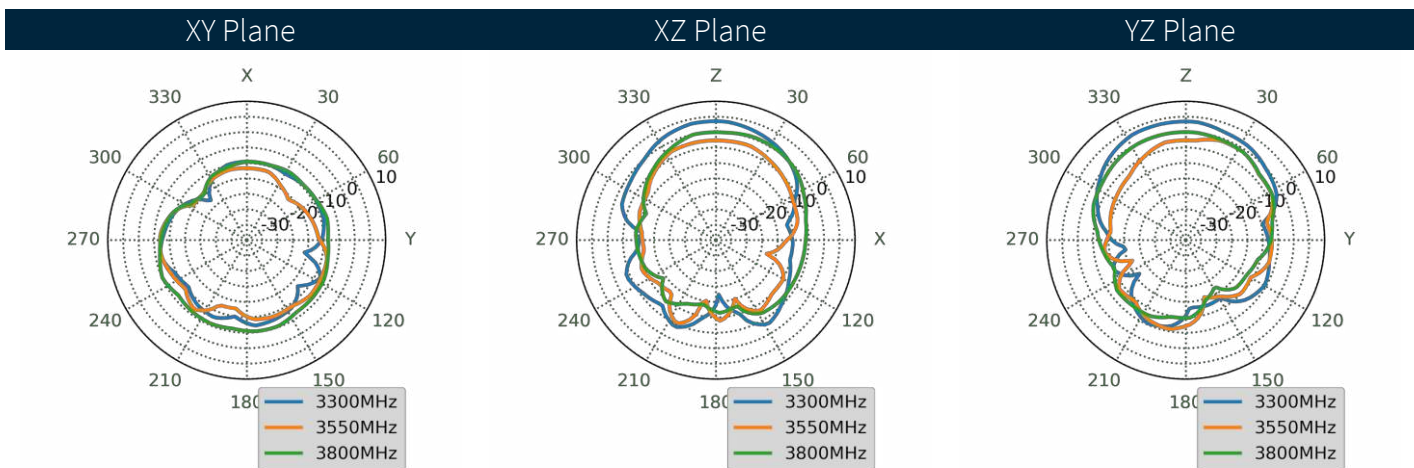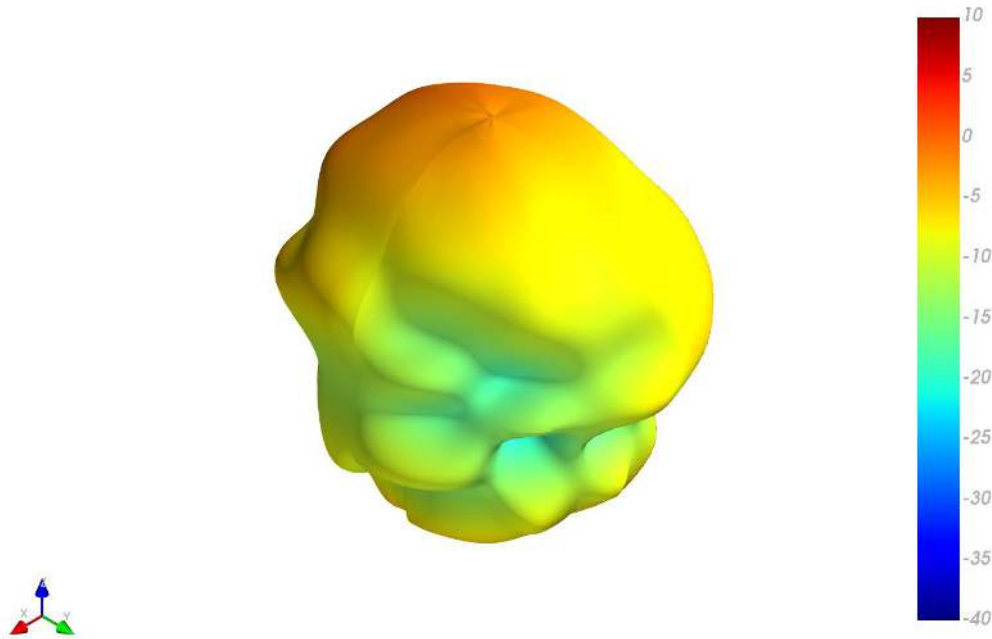


4.7 5530MHz 3D and 2D Radiation Patterns – Free Space

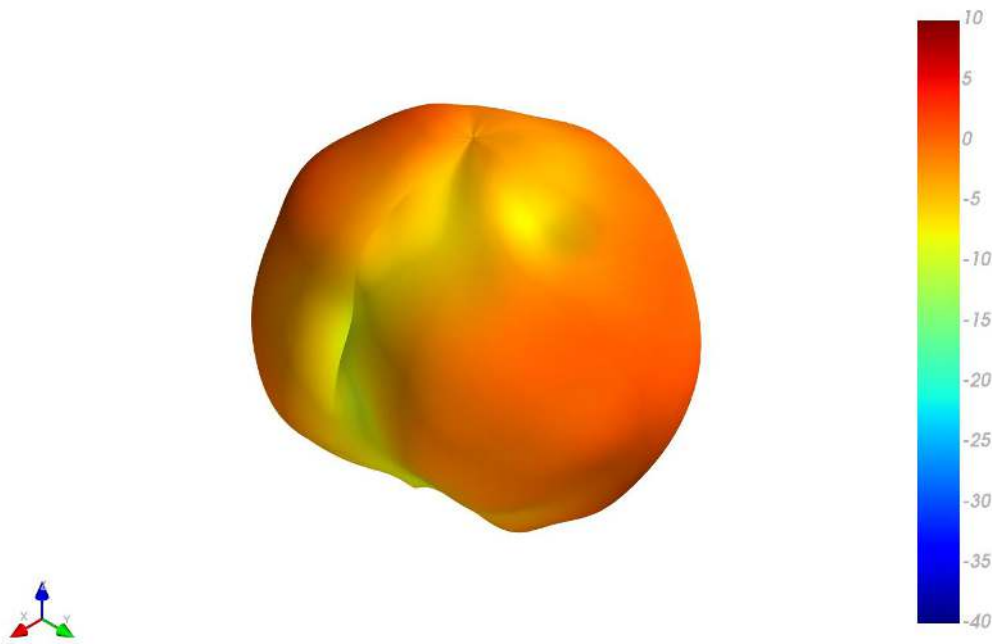




XY Plane XZ Plane YZ Plane

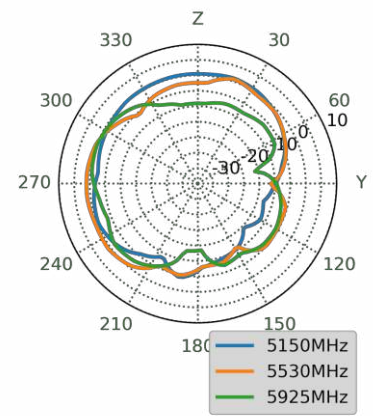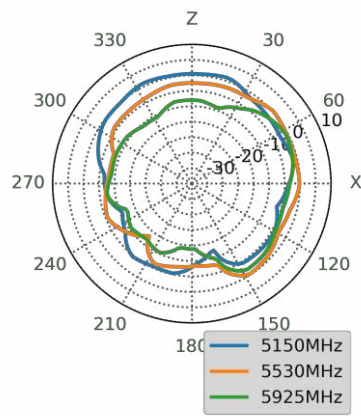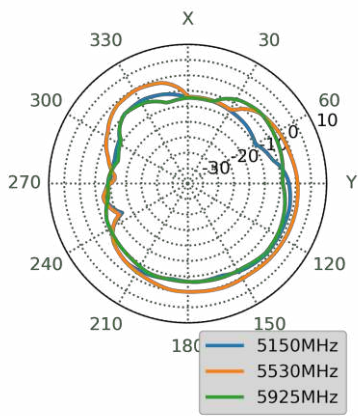



4.8 890MHz 3D and 2D Radiation Patterns – 30*30cm Ground Plane

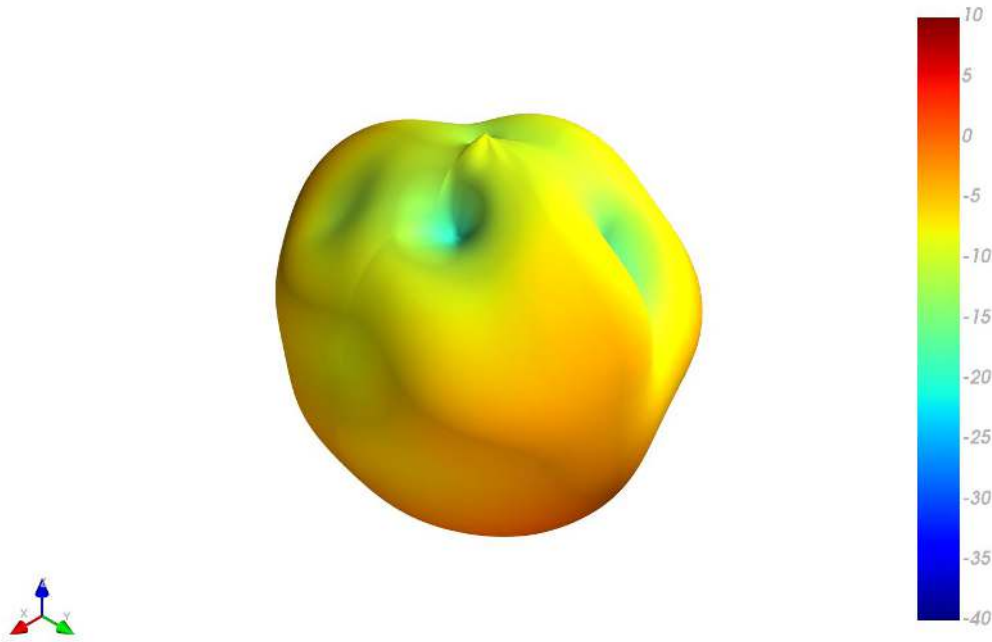



XY Plane XZ Plane YZ Plane

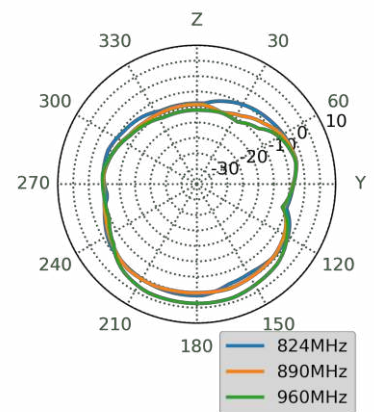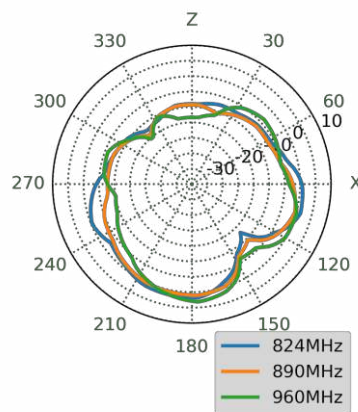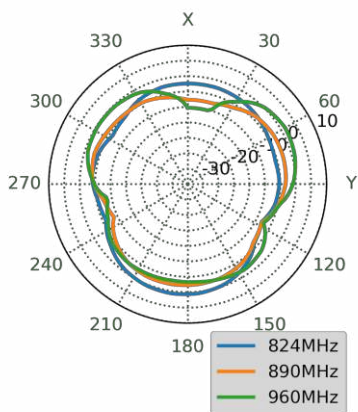



4.9 1805MHz 3D and 2D Radiation Patterns – 30*30cm Ground Plane

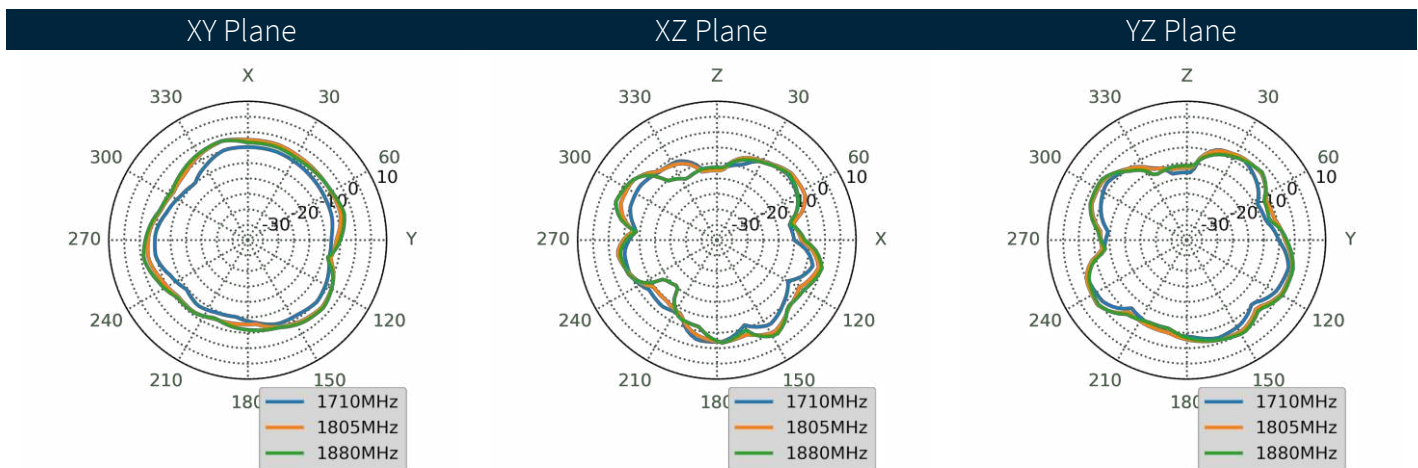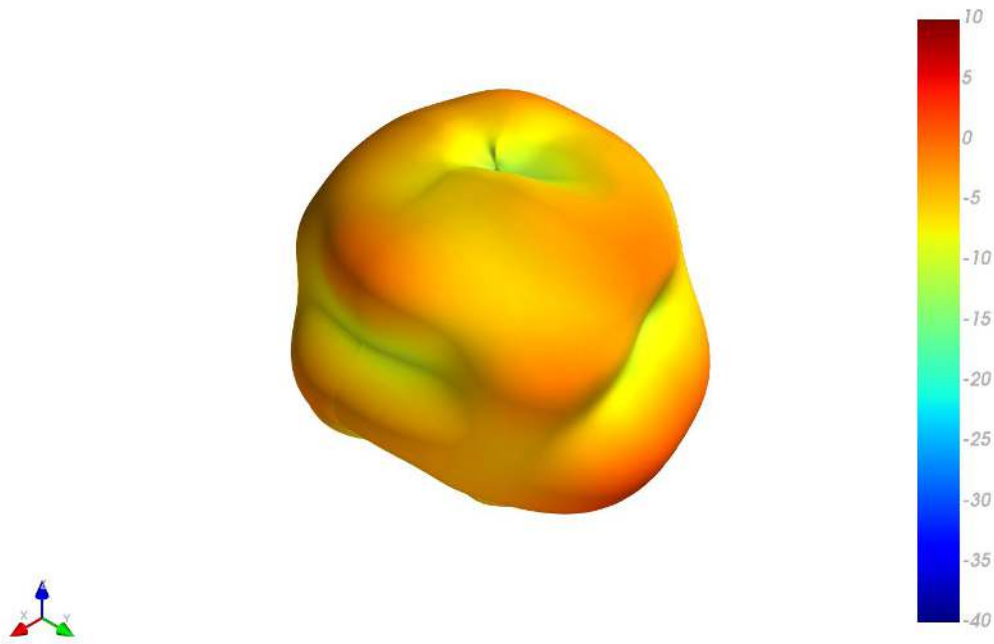


4.10 1920MHz 3D and 2D Radiation Patterns – 30*30cm Ground Plane

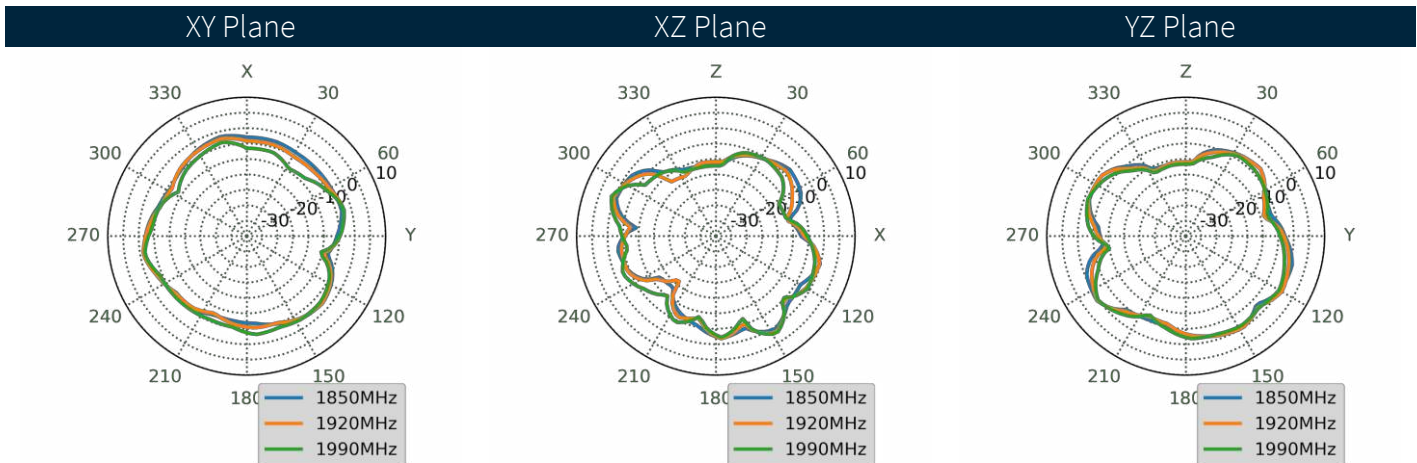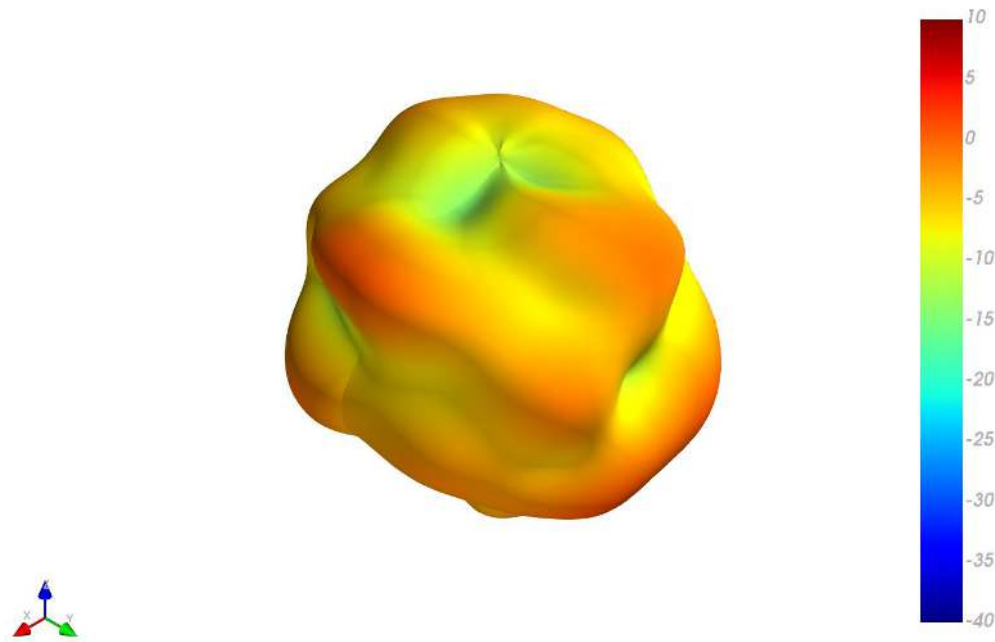




4.11 1990MHz 3D and 2D Radiation Patterns – 30*30cm Ground Plane

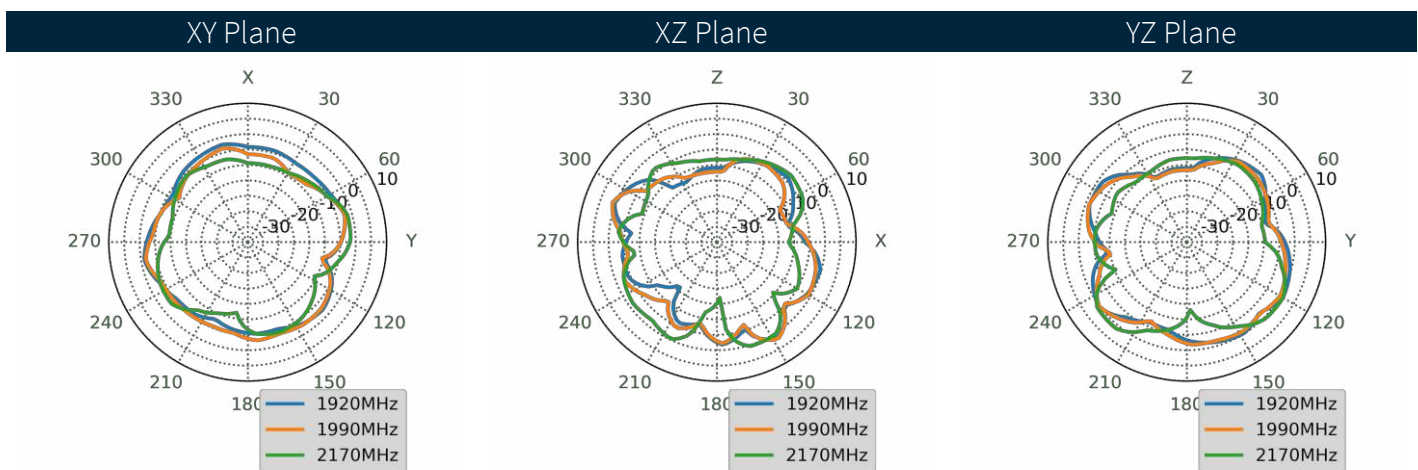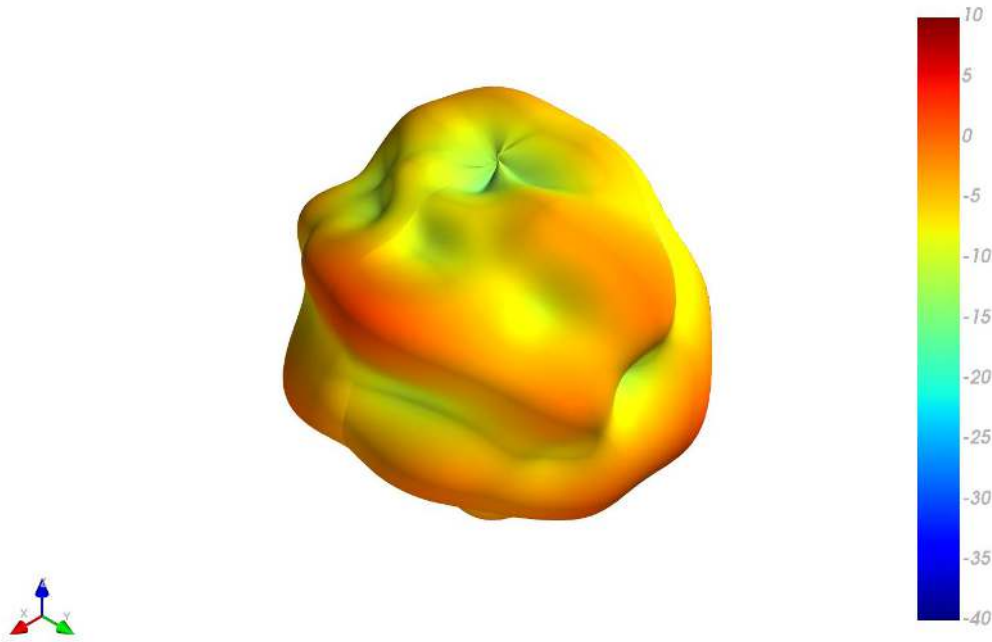



4.12 2595MHz 3D and 2D Radiation Patterns – 30*30cm Ground Plane

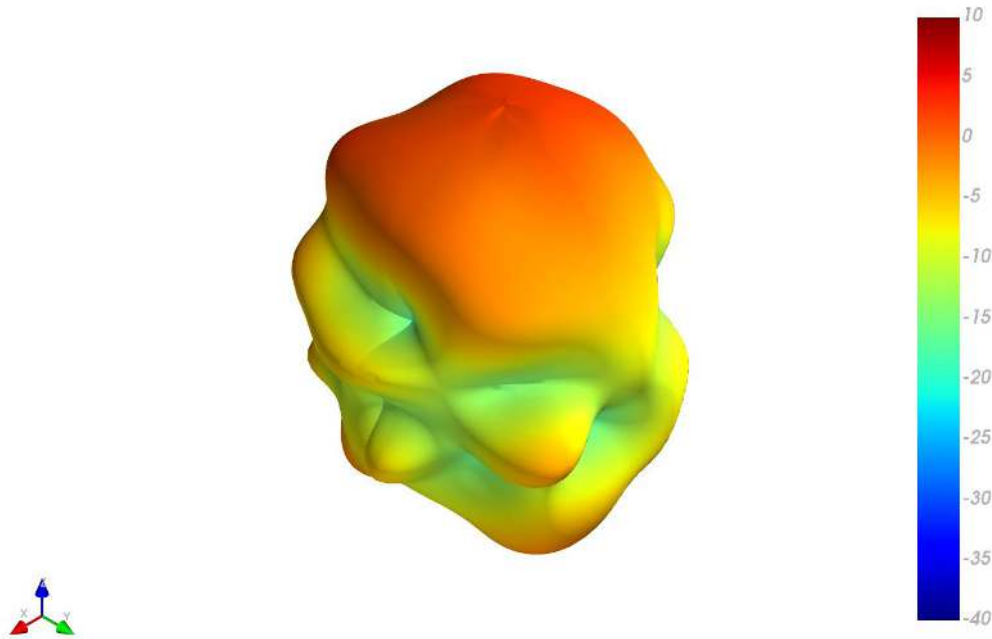



XY Plane XZ Plane YZ Plane

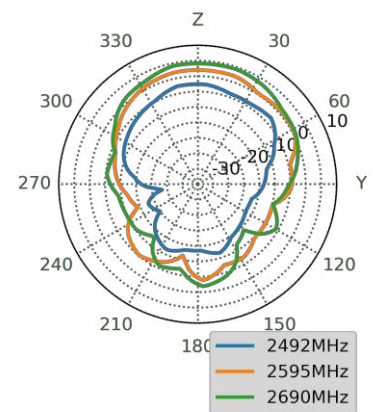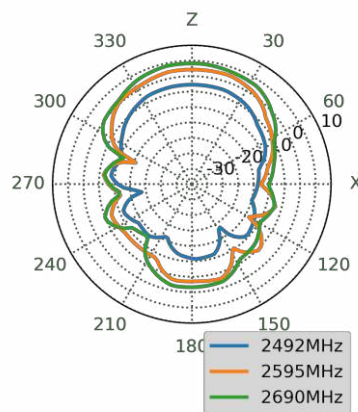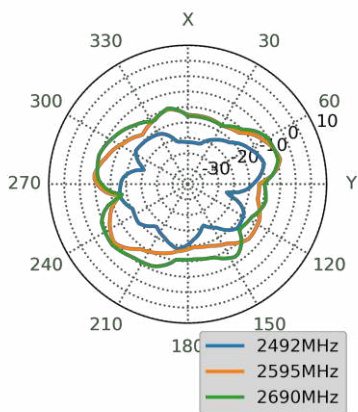


4.13 3550MHz 3D and 2D Radiation Patterns – 30*30cm Ground Plane

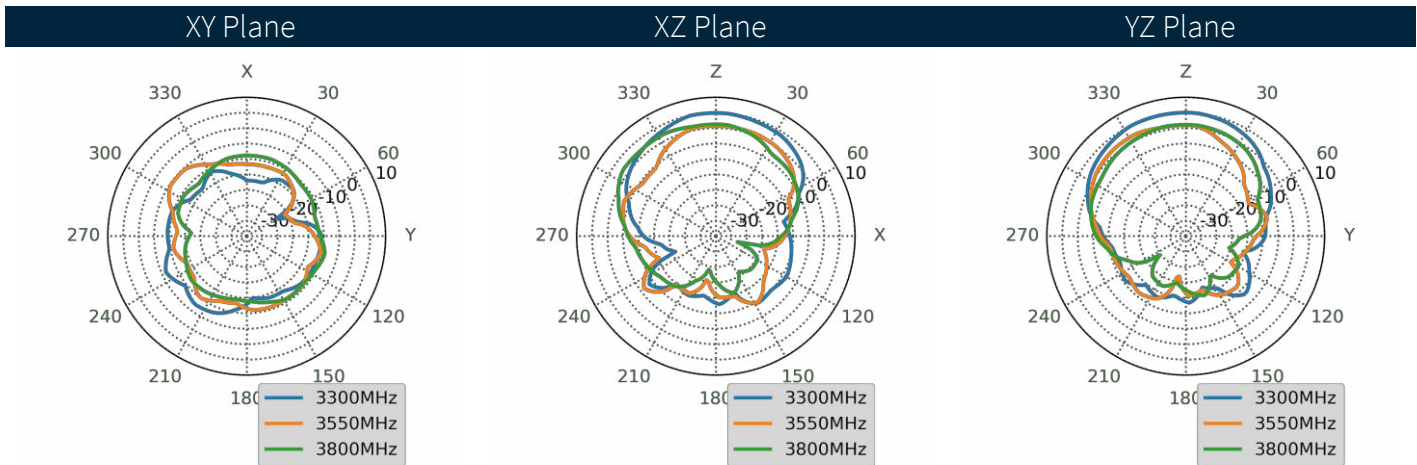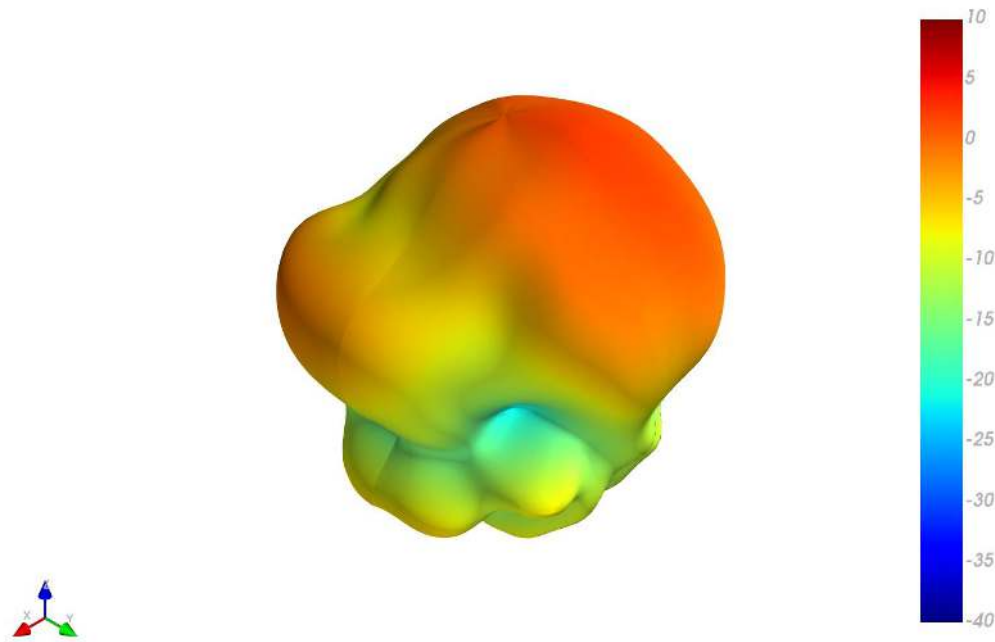

4.14 5530MHz 3D and 2D Radiation Patterns – 30*30cm Ground Plane

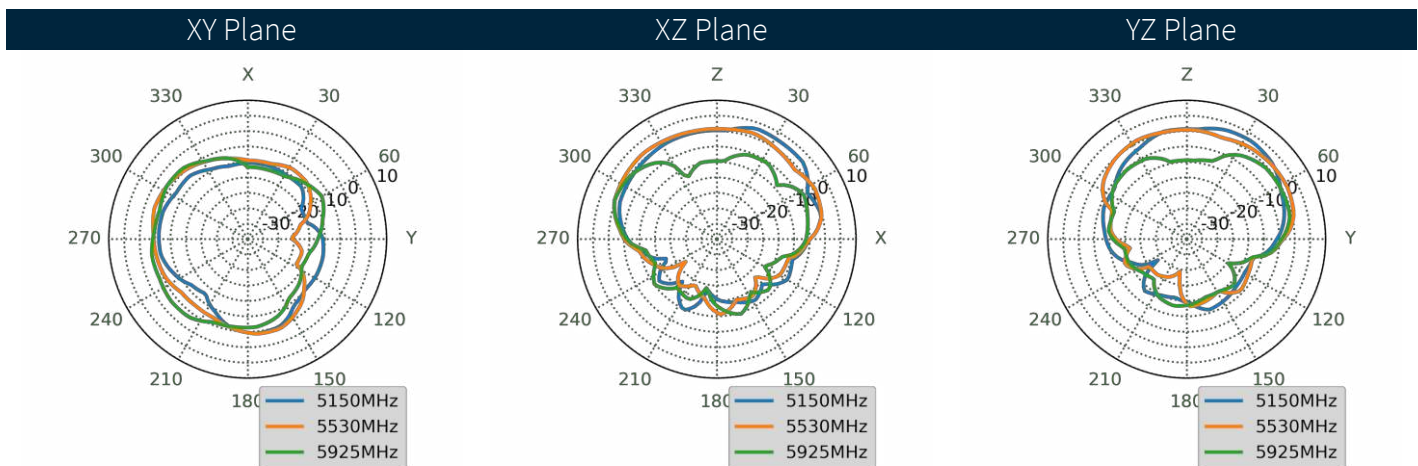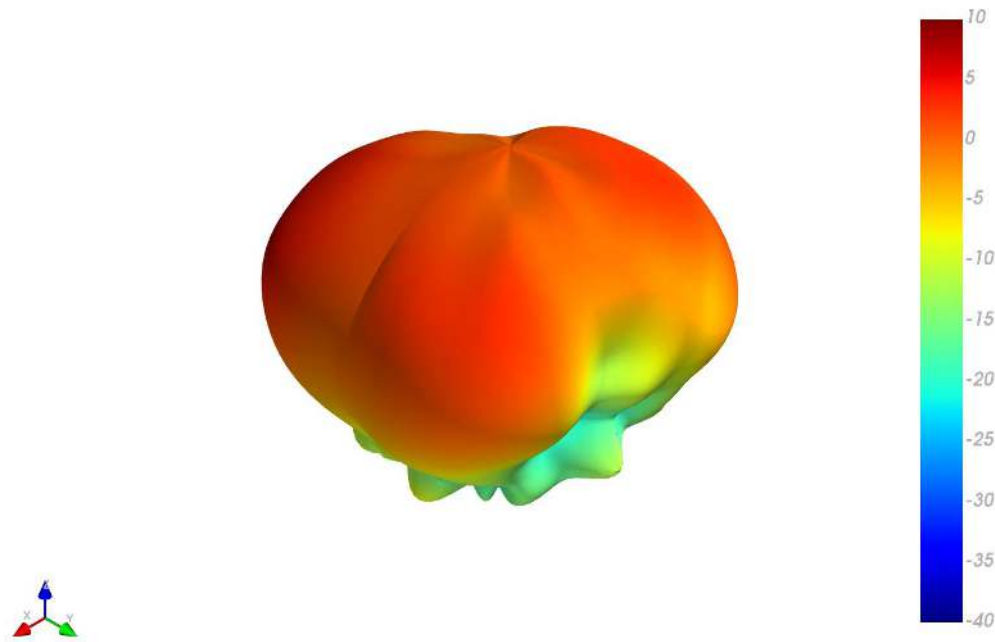


5. Mechanical Drawing (Units: mm)

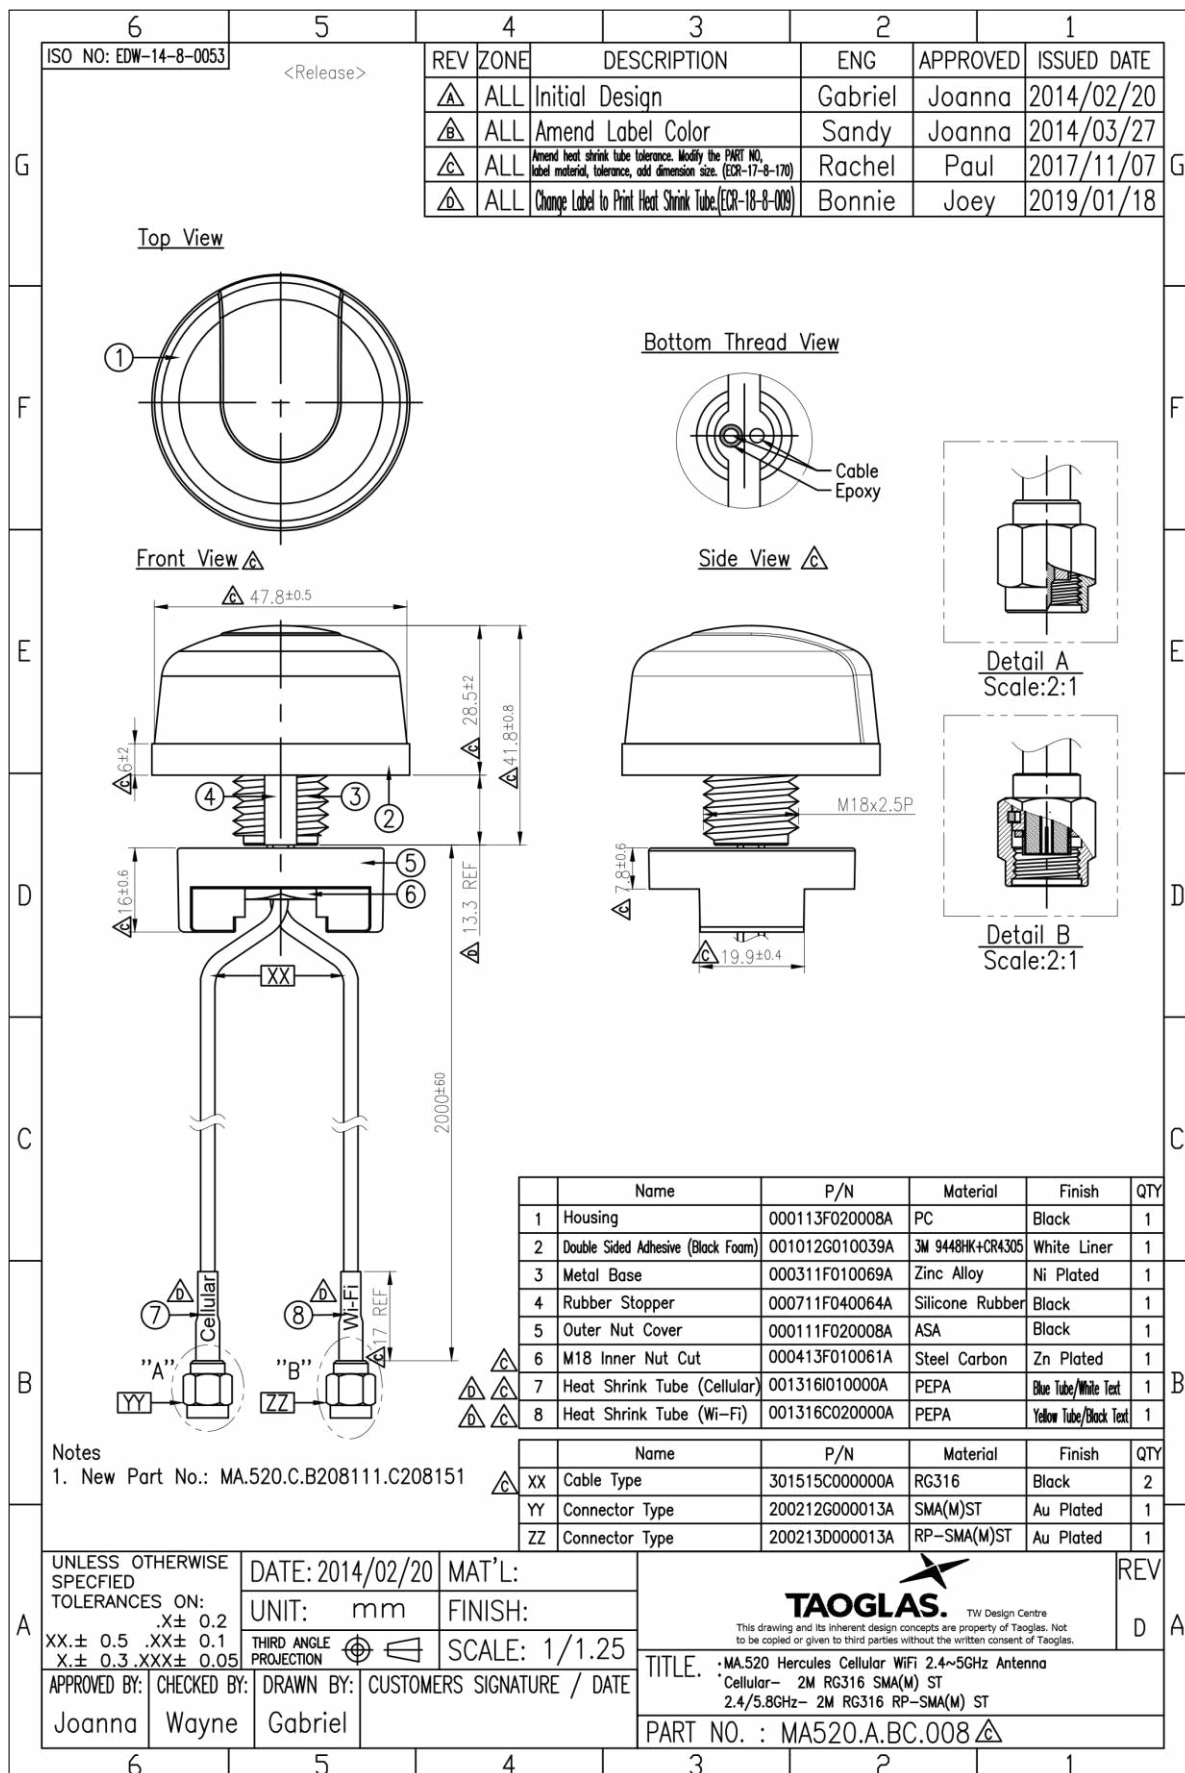


6. Packaging


1 pcs MA520.A.BC.008 per PE Bag
 Dimensions: 300*160mm
 Weight: 170g

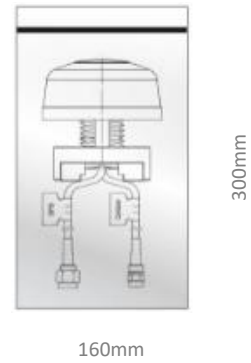

60 pcs MA520.A.BC.008 per carton
 Dimensions: 390*330*260mm
 Weight: 10.5Kg

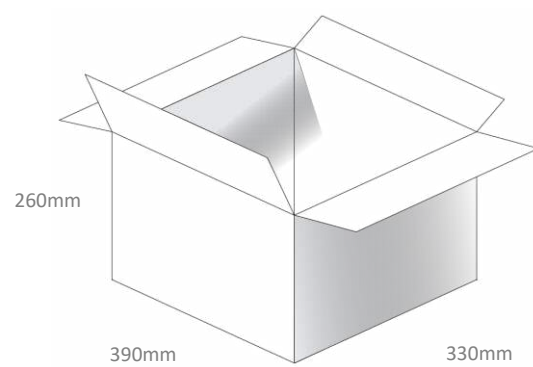

7. Installation Guidelines

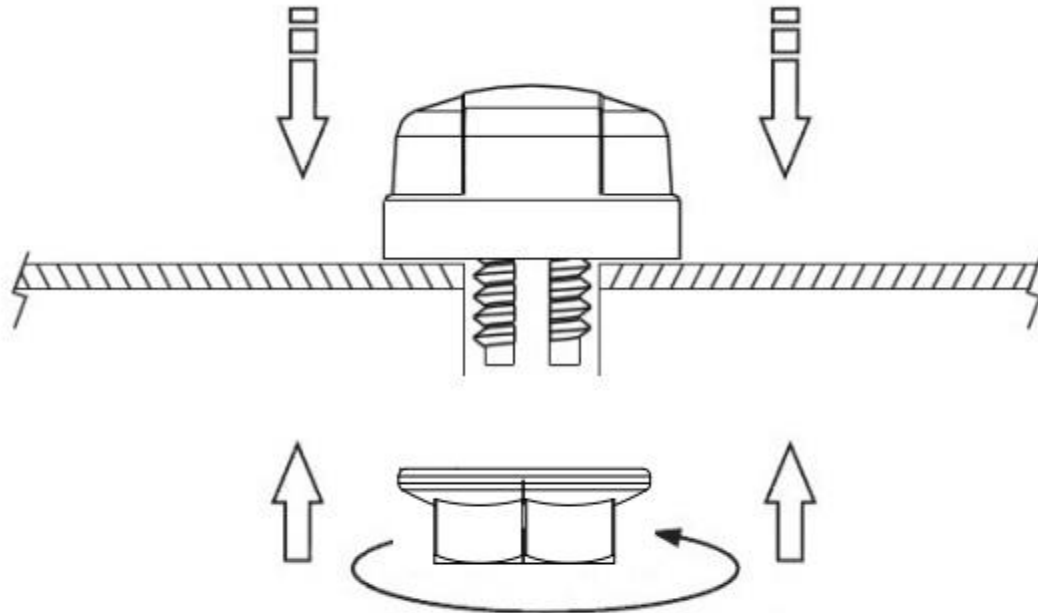


Recommended torque for Mounting is 24.5N·m
Maximum torque for mounting is 29.4 N·m


8. Application Note

8.1 Efficiency – Cellular

Free Space

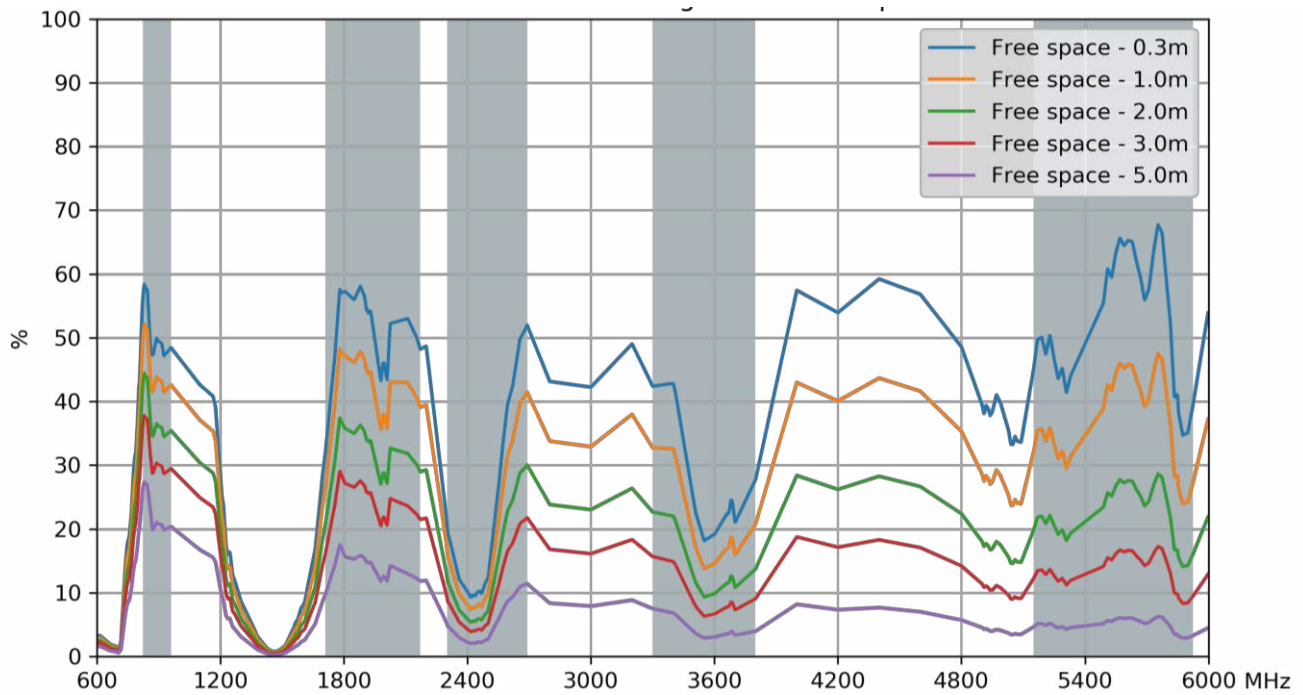


30*30cm Ground plane

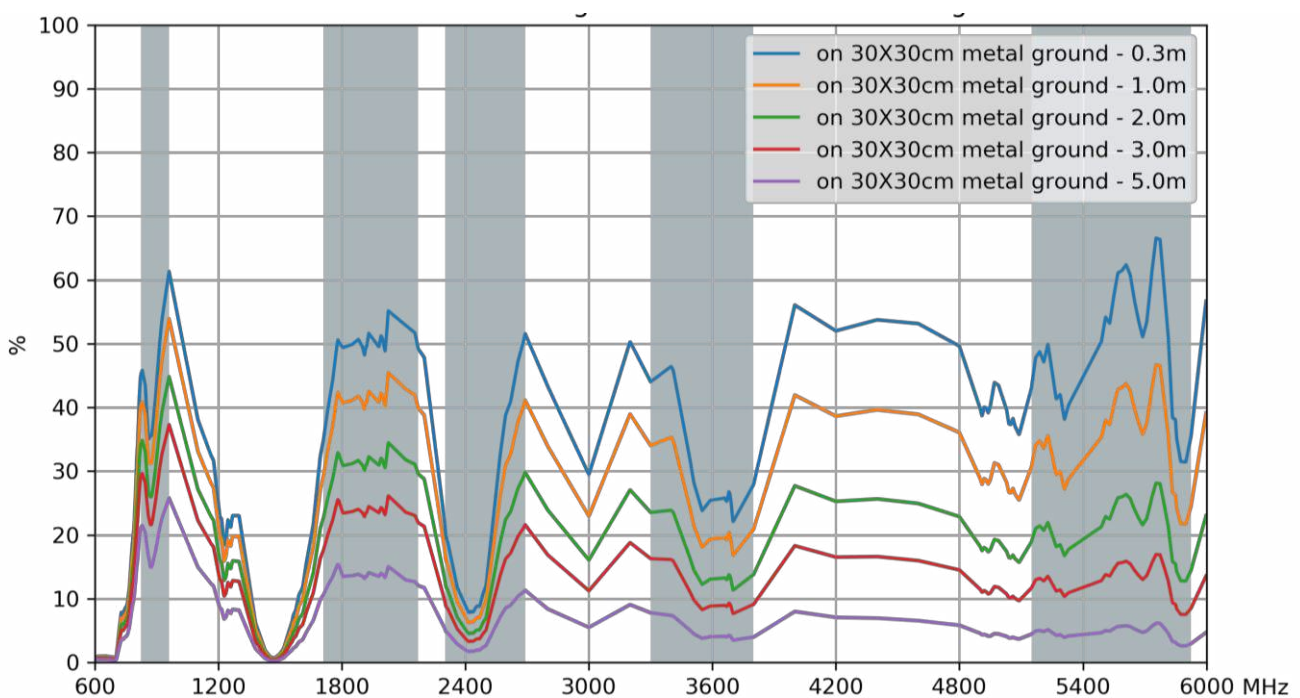


8.2 Average Gain – Cellular

Free Space

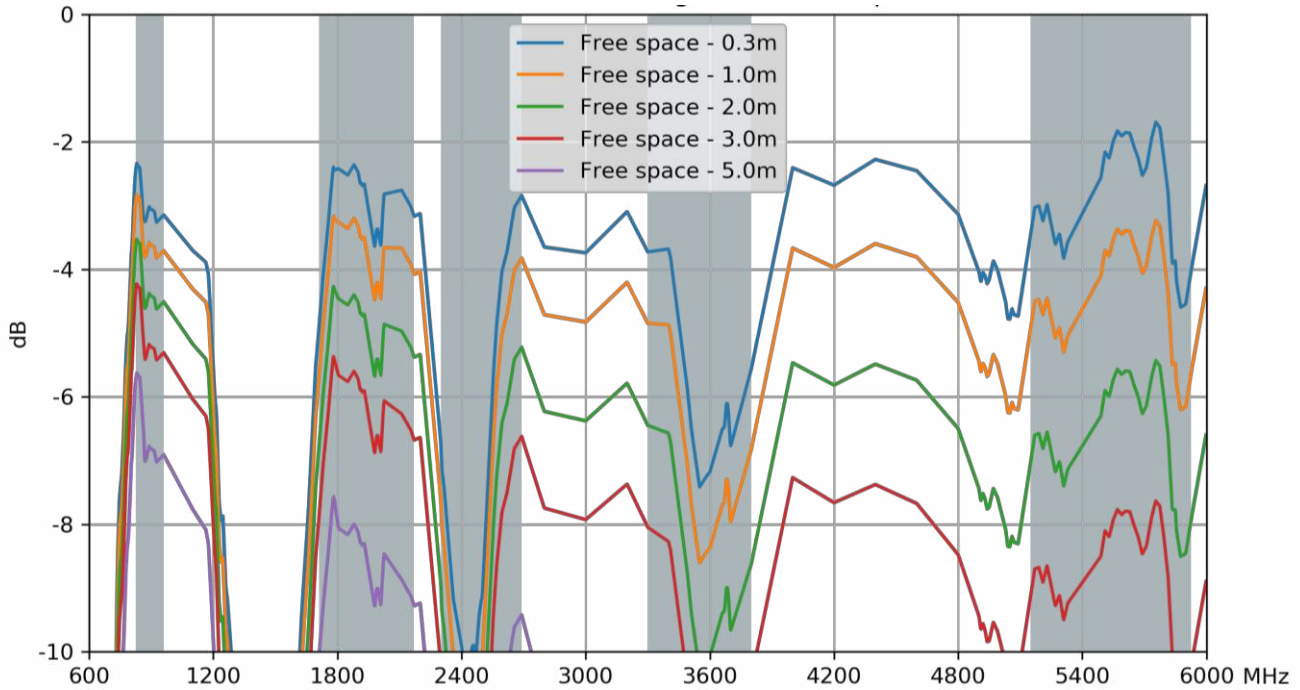


30*30cm Ground plane

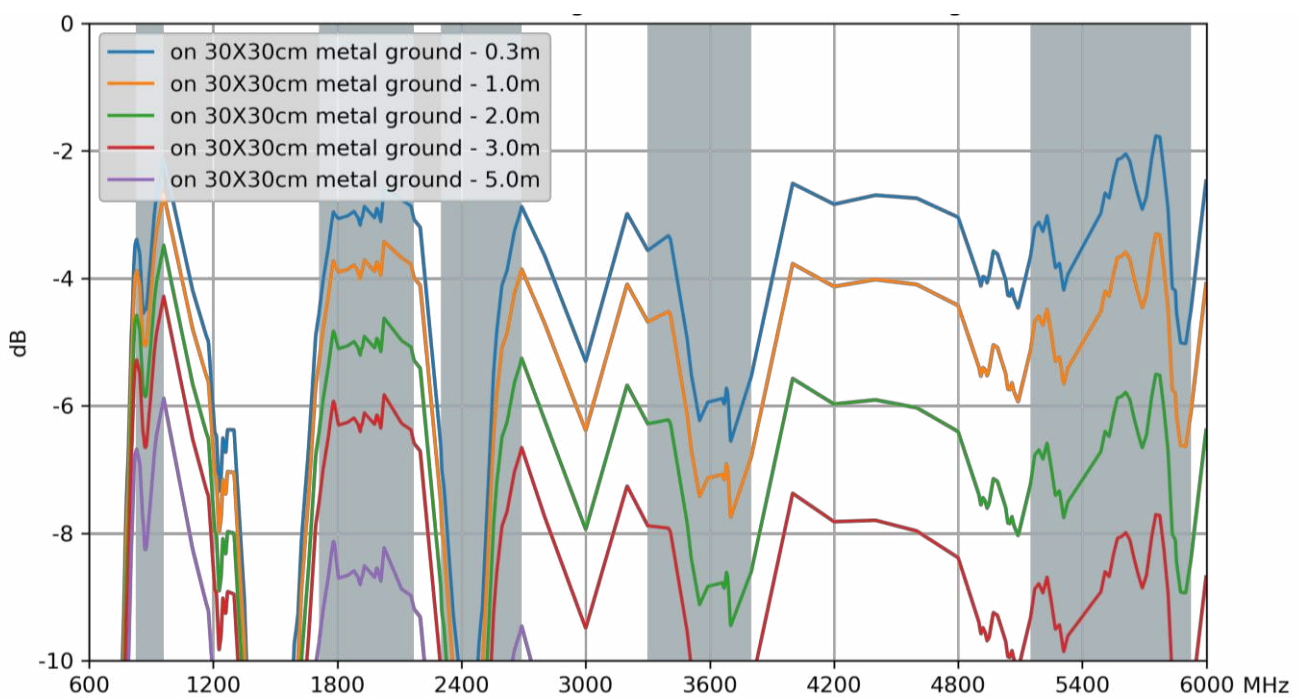


8.3 Peak Gain – Cellular

Free Space

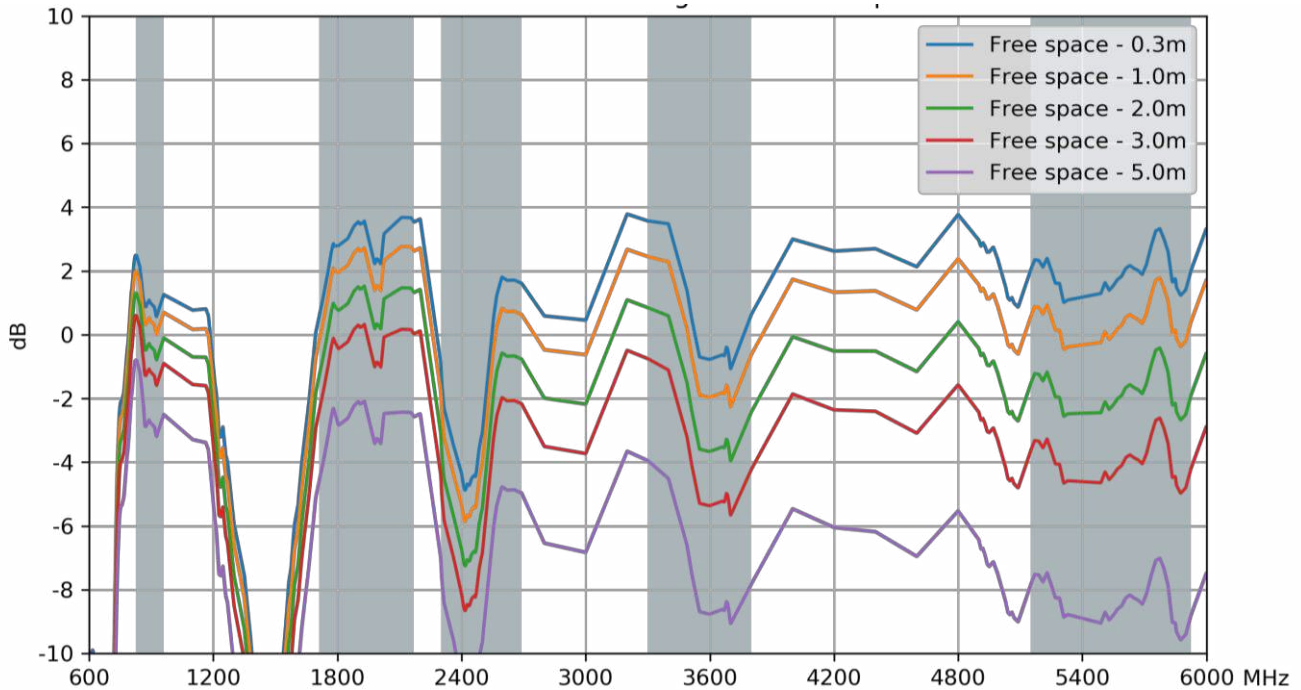

30*30cm Ground plane

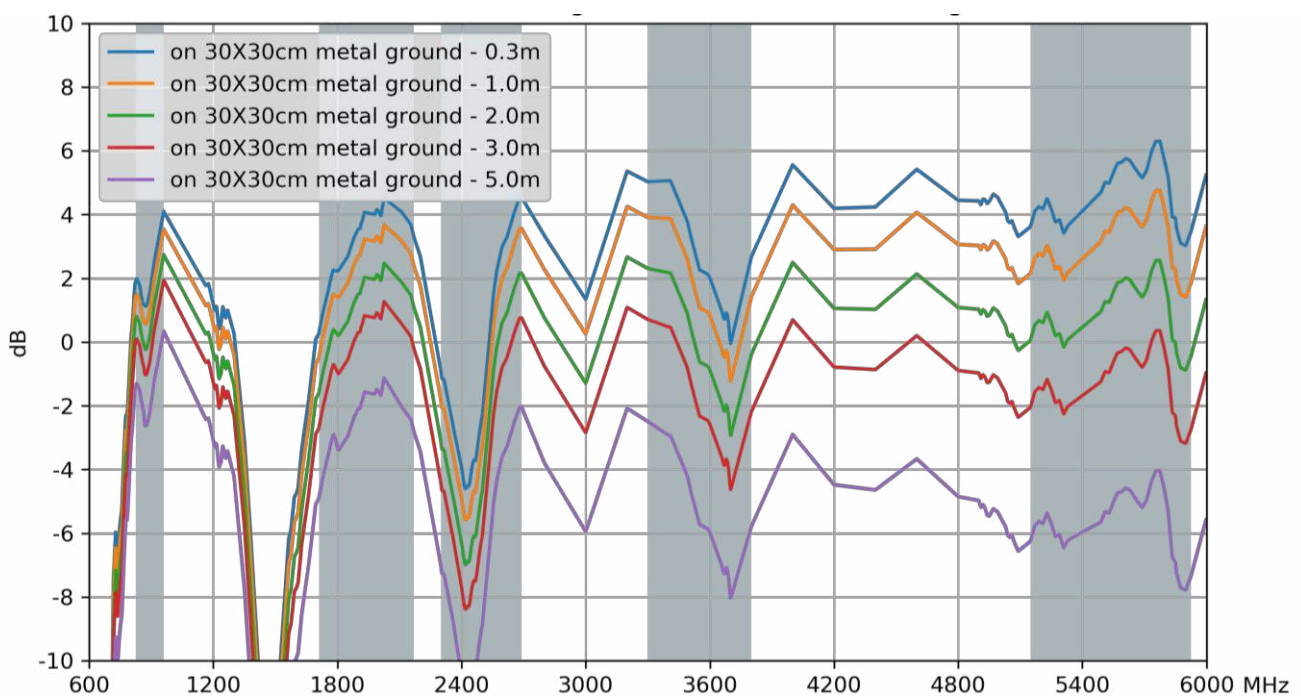

Changelog for the datasheet

SPE-13-8-071 – MA520.A.BC.008

Revision: H (Current Version)

Date:	2021-09-19
Notes:	IP Rating
Author:	Erik Landi

Previous Revisions

Revision: G

Date:	2020-04-02
Notes:	Updated drawing, Packaging, data and images
Author:	Jack Conroy

Revision: B

Date:	2013-10-24
Notes:	Amended Cellular data
Author:	Aine Doyle

Revision: F

Date:	2017-03-01
Notes:	Updated Introduction
Author:	Jack Conroy

Revision: A (Original Release)

Date:	2013-10-9
Notes:	Initial Datasheet Release
Author:	Technical Writer

Revision: E

Date:	2016-12-23
Notes:	Updated with revised salt spray data and disclaimer
Author:	Andy Mahoney

Revision: D

Date:	2016-05-18
Notes:	Updated drawing and pictures
Author:	Aine Doyle

Revision: C

Date:	2014-01-02
Notes:	Amended Photo
Author:	Aine Doyle



TAOGLAS®

www.taoglas.com

