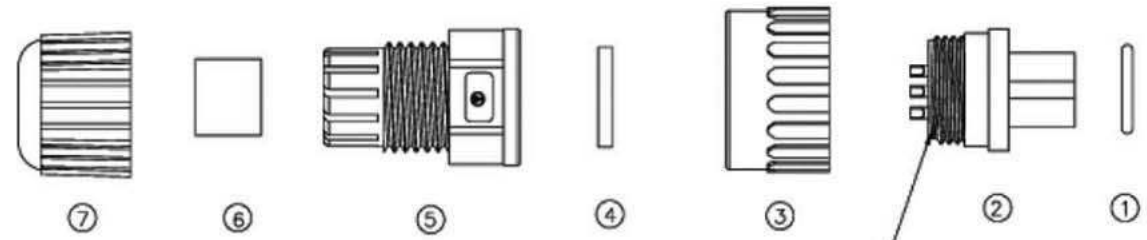



Pin Assignments
Front View



With Liquid Glue

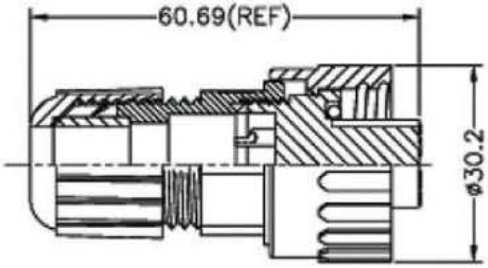

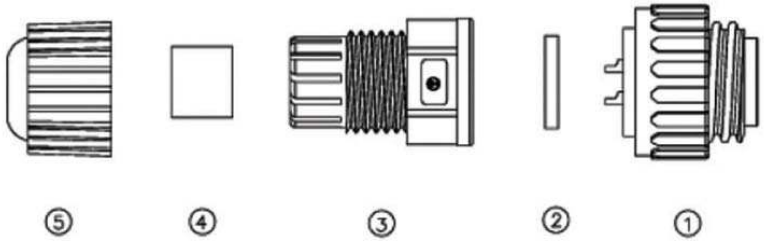

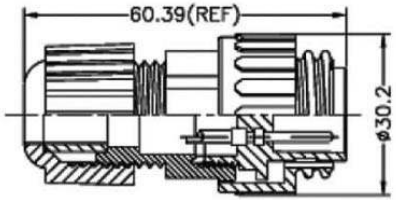

Pin Assignments
Front View

Material:

- Waterproof Rate: IP67
- Housing: Black ABS Plastic
- Connector: Black, Nylon+GF
- Pin: Copper Ally, Gold Plated
- Conttacts: Gold Plating
- Cable: (3-4 Pins: 12A) (7-8 Pins: 8A)
- Operating temperature: -40°C to +105°C
- Seals for Cable OD: 5.5mm~10.8mm

Unit: MM±0.25MM

Scale	1:1							Name
TOLERANCE						Drawn	12.02.11	Chappell
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
			Modification	Date	Name			

Item No. A-P04BFFA-S180-WP-R
A-P04BMMA-S180-WP-R
A-P07BFFA-S180-WP-R
A-P07BMMA-S180-WP-R

Title Waterproof Power Connector 4 & 7 Pins, (12A & 8A), Assembly Type

Drawing No.

rev00

Replace

Sheet

RoHS Complaint

ASSMANN WSW components