

1

2

3

4

5

6

7

A

B

C

D

E

F

G

H

A

B

C


D

E

F

G

H

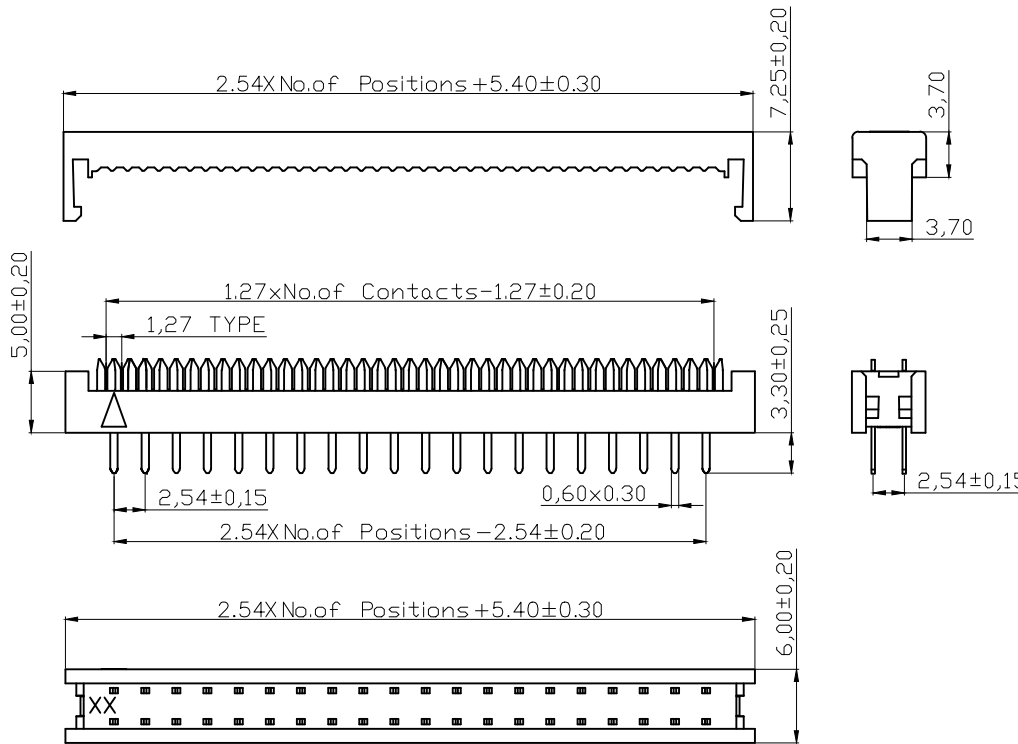

NOTES:

MATERIAL

- 1. Insulator Material: PBT+30%GF(UL94V-0), Grey
- 2. Contact Material : Brass
- ⑩ 3. Contact Plating : AWLP xx/3.2-T:Sn Over 50μ" Ni AWLP xx/3.2-T-AS: selective gold flash over 50μ"Ni


ELECTRICAL

- 1. Current Rating : 3.0AMP
- 2. Withstand Voltage : 1000V AC/DC
- 4. Contact Resistance : 20mΩ max
- 5. Insulation Resistance: 1000MΩ min

ENVIRONMENTAL

- ⑧ 1. Operation Temperature: -40°C to +105°C
- 2. Waving Soldering Temperature: 245°C, 5s Max.
- 3. Packing : Tray

- ⑨ ⑤ Order Information: contacts xx : 06,08,10,14,16,18,20, 24,26, 30,34,36,40,50,60,64

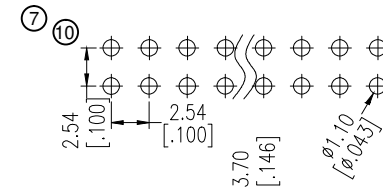

RoHS compliant
Unit: mm



Scale	Free	⑩	Add the plating gold flash & tin	25.07.2019	Winnie	Date	Name	Customer-No.	
TOLERANCE		⑨	Delete 12P & 18P & 22P & 28P & 32P & 38P	09.03.2019	Xavier	Drawn	31.07.2006	Hellwig	
X.X	±0.40	⑧	Add waving soldering temperature	08.08.2017	Ray	Approved	25.07.2019	Winnie	
X.XX	±0.25	⑦	Add recommended PCB layout	16.07.2015	Ray				
X.XXX	±0.15	⑥	Add UL file no.	12.12.2013	Amy				
Angle	±3°	⑤	Add multiple pin	17.09.2013	Winnie				
		Id.	Modification	Date	Name				
								ASSMANN WSW-No. AWLP xx/3.2-T-x	
								Drawing-No. ASS 1197 CO	rev10
								Replace dd 15.11.01	Sheet 1/1

1

2

3

4

5

6

7