


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	50-00028	Connector, dc plug, 4.75x1.7xL20 mm, EIAJ-3, molding style, spring contacts	1	
2	30-00003	Wire, 2C BC, 24 AWG, UL2468, 300V, 80C, 3.6 mm, VW-1, PVC, 76A	1	
3	24-00001	Overmold, PVC, black	1	

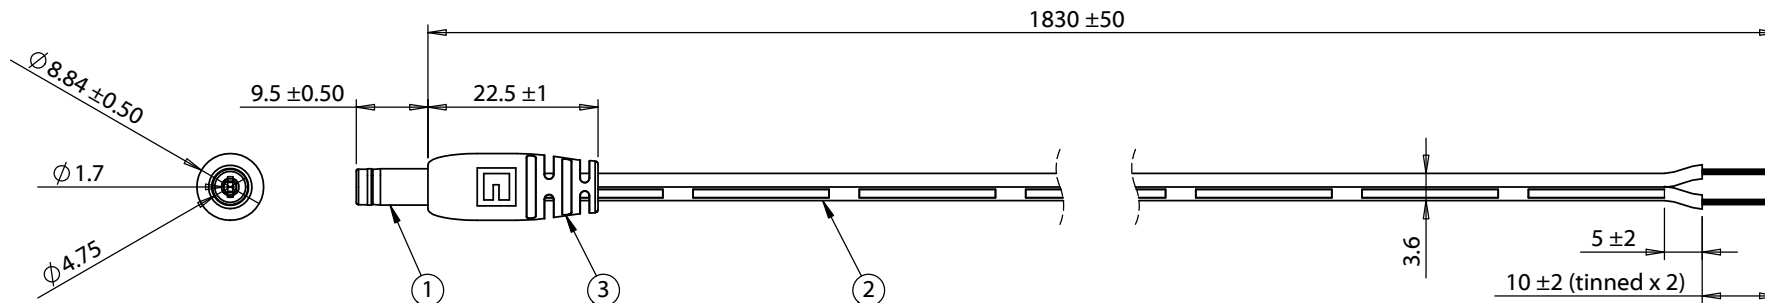

Wiring diagram	
50-00028	Wire Color
Center	Black with stripe
Sleeve	Black

REVISION	DATE	DESCRIPTION	PREPARED:	NOTES	<h1>TENSILITY</h1> <p>20802 Sockeye Place #130 Bend, OR 97701 USA tel 541.323.3228 fax 541.323.4202 800 877.670.7118 www.tensility.com</p>				
A	6/27/2012	Initial release	<b>GL</b> 2016.01.06 15:24:53 -08'00'	RoHS compliant					
			<b>LA</b> <small>Digitally signed by LA DN: cn=LA, ou=Tensility, ou=Engineering, email=541323@tensility.com, c=US Date: 2016.01.19 13:49:51 -08'00'</small>	Function test: no open, no reversed polarity, no short circuit, no INT					
			DIMENSIONS ARE IN MILLIMETERS	4 A, 12 Vdc					
			TOLERANCES: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Functionally equivalent components may be used					
				DESCRIPTION: Cable, 1830 mm, 4.75x1.7x9.5 mm 50-00028 dc plug to stripped tinned, 24 AWG, 30-00003 wire	<table border="1"> <tr> <td>SIZE</td> <td>PART NUMBER</td> </tr> <tr> <td>A</td> <td>10-01078</td> </tr> </table>	SIZE	PART NUMBER	A	10-01078
SIZE	PART NUMBER								
A	10-01078								
					<table border="1"> <tr> <td>SCALE: 1:1</td> <td>WEIGHT:</td> <td>SHEET 1 OF 1</td> </tr> </table>	SCALE: 1:1	WEIGHT:	SHEET 1 OF 1	
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1							